

AMSOIL[®]

► PREFERRED CUSTOMER EDITION

MAGAZINE

SPRING 2021



AMSOIL 100% SYNTHETIC DIESEL OIL
BIG PROTECTION
for Smaller Diesel Vehicles

| PAGE 4

ATVs & UTVs Require a Little Oil to Do a Lot of Work | PAGE 10



STAFF

Editor

Terry Johnsen

Associate Editor

Joel Youngman

Staff Writers

John Baker
Jamie Trembath
Joel Youngman

Graphic Design Manager

Jeff Spry

Senior Graphic Designer

Luke Boynton

Content Contribution

Brett Granbo
Len Groom
Mark Nyholm

Editorial Contribution

Matt Erickson

Back Issues

Back issues of *AMSOIL Magazine* are available for \$1 each. Order G17PC and specify the month and year.

On the Web

AMSOIL.com
AMSOIL.ca

President & CEO

Alan Amatzio

Board Chair

Dean Alexander

© 2021, AMSOIL INC.
All rights reserved.

Printed by Arrowhead Printing
Duluth, MN USA.

Testimonials

AMSOIL INC.
Communications Department
The AMSOIL Building
925 Tower Ave.
Superior, WI 54880

testimonials@AMSOIL.com



AMSOIL BYPASS SYSTEMS

- **Significantly** extended engine life
- **Efficient** small-particle and soot removal
 - **Reduced** maintenance costs
 - **Improved** oil cooling
 - **Extended** drain intervals



TABLE OF CONTENTS - PRODUCTS

Gasoline Motor Oil	14
European Motor Oil	18
Classic/Collector Car Motor Oil	20
Racing Oil	22
Diesel Oil	24
Transmission Fluid	26
Gear Lube	28
Fuel Additives	30
Filters	32
Grease	33
ATV/UTV Oil	34
Motorcycle Oil	36
Dirt Bike Oil	38
4-Stroke Oil	39
2-Stroke Oil	40
Marine Oil	42
Cleaners and Protectants	44
Miscellaneous	46

PREFERRED CUSTOMER EDITION

SPRING 2021

FEATURES

- 4 Big Protection for Smaller Diesel Vehicles
- 6 Get a Head Start on Spring Oil Change Season
- 8 AMSOIL Synthetic Small-Engine Oil Delivers Commercial-Grade Protection
- 10 ATVs & UTVs Require a Little Oil to Do a Lot of Work
- 12 Half-Million-Mile VW* Beetle* Still Running Strong

DEPARTMENTS

- 7 Tech Talk

ADVERTISEMENTS

- 2 AMSOIL Bypass Systems
- 9 Everything Your Harley Needs, Including Better Protection
- 13 Product Spotlight: AMSOIL Engine and Transmission Flush
- 48 Cleaner. Faster. Easier.



THE COVER

The diesel-engine option in this truck pairs 440 lb.-ft. of torque with 30 mpg fuel economy. This mix of power and efficiency is driving many customers toward smaller diesel vehicles.

*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

Big Protection for Smaller Diesel Vehicles

New AMSOIL 100% Synthetic Diesel Oil provides outstanding protection, performance and fuel economy for smaller American diesel pickups, vans, cars and SUVs.

The diesel market continues to grow and gain popularity. While diesel enthusiasts and professionals often rely on powerful turbodiesel engines in their vehicles, not everyone needs or wants a fully loaded, three-quarter-ton or larger pickup. But many still want the added power, torque and fuel economy of a diesel engine, and they're willing to pay more to get it.

Increased Demand

The market has seen increased demand for diesel engines in smaller, half-ton pickups and other passenger vehicles, including the Chevrolet* Silverado 1500,* Chevrolet Colorado,* GMC* Sierra 1500,* GMC Canyon* and Ford* F-150.* Diesel options are also popular in smaller passenger vehicles like the Chevrolet Cruze,* Chevrolet Equinox* and GMC Terrain.* An estimated 200,000 smaller diesel vehicles are currently operating in the U.S., a 58 percent increase over 2019, and those numbers are expected to continue rising.

Which Oil to Use?

AMSOIL Signature Series Max-Duty Synthetic Diesel Oil and Heavy-Duty Synthetic Diesel Oil provide premium protection for large turbodiesel engines calling for an API CK-4 (or prior) specification, but smaller diesel engines require diesel oils meeting different specifications. While we've recommended AMSOIL Synthetic European Motor Oil for many of these vehicles, and it provides outstanding protection, it is not specifically formulated or marketed for American diesel vehicles.

AMSOIL 100% Synthetic Diesel Oil

Available in 0W-20 and 5W-30 viscosities, new AMSOIL 100% Synthetic Diesel Oil (DP020, DP530) is engineered specifically for smaller American diesel vehicles and provides industry-leading protection and performance. In fact, **it delivers up to 6X better wear protection than required by a leading industry standard.¹**

- Outstanding protection during heavy use and abuse and in extreme temperatures
- Helps extend engine life and reduce maintenance costs and downtime
- Helps maintain power and fuel efficiency for superior engine performance
- Outstanding turbocharger and emissions-system protection
- Superior engine cleanliness
- Minimizes oil consumption
- Meets or exceeds the latest specifications for smaller diesel vehicles

0W-20 100% Synthetic Diesel Oil

U.S. PRICING

Stock #	Units	Pkg./Size	U.S. P.C.
DP020QT	EA	1 Quart	8.40
DP020QT	CA	12 Quarts	95.95
DP02055	EA	55-gal. Drum	1541.95

CANADA PRICING

Stock #	Units	Pkg./Size	Can. P.C.
DP020QTC	EA	(1) 946-ml Bottle	11.25
DP020QTC	CA	(12) 946-ml Bottles	128.55
DP02055	EA	208-litre Drum	2068.70

5W-30 100% Synthetic Diesel Oil

U.S. PRICING

Stock #	Units	Pkg./Size	U.S. P.C.
DP530QT	EA	1 Quart	8.40
DP530QT	CA	12 Quarts	95.95
DP53055	EA	55-gal. Drum	1541.95

CANADA PRICING

Stock #	Units	Pkg./Size	Can. P.C.
DP530QTC	EA	(1) 946-ml Bottle	11.25
DP530QTC	CA	(12) 946-ml Bottles	128.55
DP53055	EA	208-litre Drum	2068.70



Applications

Use in diesel pickups, vans, cars and SUVs that require any of the following specifications:

0W-20 (DP020): GM dexosD

5W-30 (DP530): GM dexosD, dexos2; Chrysler MS-11106; Ford WSS-M2C214-B1; ACEA C3

Not for use in applications that require an API CK-4 (or prior) specification.

Service Life

AMSOIL 100% Synthetic Diesel Oil is recommended for the drain intervals stated by the original equipment manufacturer (OEM). Refer to the owner's manual for the specific oil change interval. Intervals may be extended beyond the OEM-recommended interval with oil analysis.



LET'S GET STARTED
Tell us about your Auto & Light Truck.

[← return to previous section](#)

YEAR	MAKE	MODEL	ENGINE
Select Year	Select Make	Select Model	Select

FIND PRODUCTS

Visit [AMSOIL.com](#) (AMSOIL.ca in Canada) and click "Look Up A Vehicle" to access the AMSOIL product guides.

AMSOIL AUTO & LIGHT TRUCK LOOKUP GUIDE Disclaimer and Technical C.A. Specifications contained on this website are based on manufacturer information and were believed accurate at the time of publication. Our recommendations apply to AMSOIL products only, as we cannot be responsible for products from other manufacturers. Always compare fluids and lubricants that were installed in the vehicle with those replacing them during service. Never install more fluid or lubricant than what is considered adequate according to gradients on dipstick or level of filler neck. Fill and drain locations are for reference only. Failure to perform adequate inspections or obtain proper resolution will limit or negate any liability toward AMSOIL, Inc. Models introduced midyear may not have the same specifications as those produced earlier.
If any discrepancies are noted, they can be simply reported to AMSOIL by clicking on the "Report a Problem" link. We review all reported problems. If you would like a personal response to the issue you are reporting please enter your email address in the space provided on the form.
DATA UPDATED: 12/16/2020




GET A HEAD START ON SPRING OIL CHANGE SEASON

Warmer weather is around the corner, and that's often the cue to start performing vehicle maintenance. AMSOIL product guides are the easiest way to find all the right products you'll need to get your vehicles and equipment ready for the year ahead.

Select your vehicle's year, make and model and the AMSOIL Product Guide will find the best product recommendations based on your selection.

Complete Oil Change



Total Price:
\$74.80

[ADD ALL TO CART](#)

- This item: Signature Series 0W-20 - 6 (5.5 quart capacity)
- AMSOIL EA Oil Filters - EA15K13 (\$14.80) Best filtration, up to 15k miles.
- Recommended Top-Off Quart (\$10.00)

COMPLETE OIL CHANGE

AMSOIL product guides offer an easy way to purchase a full kit with the correct amount of oil and filter needed for a complete oil change on your selected vehicle or equipment.

MORE THAN JUST MOTOR OIL

While an oil change is often the only regular vehicle maintenance performed, other fluids and components also require attention for vehicles to perform at a high level. Remember to take care of your drivetrain, fuel system and other components as you start performing vehicle maintenance this year.

- Transmission Fluid
- Gear Lube
- Coolant
- Power Steering Fluid
- Brake Fluid



AMSOIL product guides provide recommendations for every vehicle component that requires lubrication, as well as recommendations for filters, fuel additives, cleaners and other preventive maintenance products.

- Auto/Light Trucks • Motorcycles • ATVs • UTVs
- Snowmobiles • Marine Outboards • Personal Watercraft
- Small Engines • Heavy-Duty Commercial Vehicles



Matt Erickson | DIRECTOR, TECHNICAL PRODUCT MANAGEMENT

Oil-life monitors keep improving, but they're not perfect.

What happens when your vehicle's oil-life monitor contradicts our oil-change recommendations?

Oil-life monitoring systems (OLMS) are standard on most vehicles today. Their prevalence the past several years has helped convince motorists to go longer between oil changes than the old 3,000-mile (4,800-km) standby, reducing waste oil and saving time and money. Today, it's common for an OLMS in a vehicle driven mostly under normal service to recommend an oil change after 10,000 miles (16,100 km) or more.

For all their benefits, these systems do have shortcomings. For starters, they sometimes provide service intervals that contradict the recommendations of some of our oils. Their biggest shortcoming, however, is what they *don't* do. To get the details, let's look at how an OLMS works.

Frankly, oil-life *monitor* is a poor description for these systems. A better name is oil-life *estimator*. They **do not monitor any direct physical or chemical property of oil**; they only accumulate data from the vehicle's computer and predict how your driving habits and operating conditions have affected the oil's viscosity, total base number (a measure of remaining detergency), oxidation level and other factors.

Since the OLMS can't measure these key properties like a chemist in a lab would measure them, how can it know when the oil has, for example, only 10 percent life remaining? It can't. The OLMS simply estimates oil life based on an algorithm.

While first-generation oil-life monitors were simple, mileage-based systems that prescribed fixed oil-change in-

tervals regardless of operating conditions, today's systems are far more sophisticated. They monitor several conditions known to reduce oil life, enter those values into an algorithm and return the oil-life percentage you see on your vehicle's display.

Towing, for example, can lead to increased engine rpm, which stresses the engine and the oil. If the vehicle's computer detects frequent high-rpm driving, the OLMS will shorten the oil-change interval. The same holds for extreme ambient heat, which can accelerate oxidation and chemical breakdown of the oil. Continually driving under heavy loads, like while towing, also shortens the drain interval, along with several other factors.

For example, Ford* says in a video on its website that drivers can expect its Intelligent Oil-Life Monitor* to recommend oil changes about every 7,500-10,000 miles (12,100-16,100 km). But, if you do a lot of trailer-towing or idling, expect the system to recommend oil changes every 5,000-7,500 miles (8,000-12,100 km). Driving in extreme temperatures or frequently towing near maximum capacity will lead to oil changes every 3,000-5,000 miles (4,800-8,000 km). Oil-life monitors from other automakers typically follow the same pattern.

But, what if I use AMSOIL Signature Series Synthetic Motor Oil, which is proven to neutralize acids, fight viscosity loss and resist volatility better than other oils, helping it last longer? How does the OLMS adjust its recommendations depending on oil quality? It can't, which brings us to another key point to remember about these systems. For all their benefits,

your OLMS cannot differentiate between a high-quality synthetic oil and a cheap conventional oil.

In these cases, your OLMS may recommend an oil change in your heavy-use pickup after just 5,000 miles (8,000 km) when you know perfectly well the Signature Series in the engine is good for another 10,000 severe-service miles (16,100 km) since we guarantee the oil for up to 15,000 miles (24,100 km)/one year in severe service. The same principle holds for XL Synthetic Motor Oil, which carries a maximum drain interval of up to 12,000 miles (19,300 km)/one year.

Despite the sophistication of oil-life monitoring systems, they have drawbacks. You can rest assured, however, that our synthetic motor oils will deliver excellent protection in your vehicle for the drain interval we recommend, regardless of what the OLMS says. If you elect to extend your drain interval, but your OLMS calls for an oil change before reaching the end of the oil's guaranteed service life, simply reset the OLMS and follow the guidelines we provide on the product label. There's no sense wasting good oil.



AMSOIL Synthetic Small-Engine Oil Delivers Commercial-Grade Protection

Mowers, generators, pumps, compactors and other equipment often operate in hot, dirty conditions that lead to deposits and wear. This can cause reduced engine compression, robbing the engine of power. Over time, equipment becomes less efficient, requires more maintenance and eventually wears out.

Commercial-grade formulation

Most small-engine oils we've tested, however, are nothing more than re-labeled automotive oils, which are formulated with fuel economy in mind, not durability. That won't cut it. Compared to liquid-cooled automotive engines, small engines run hotter; operate under constant load; generate more oil-damaging contaminants; suffer from neglected maintenance; and are exposed to dirt, rain and other extremes. Simply put, they're far tougher on oil than most people think.

AMSOIL Synthetic Small-Engine Oil isn't merely a re-badged automotive oil. Instead, we designed it from the ground up specifically for small-engine dependability. You can rest assured your engines are protected even during periods of extended use when there's no time for scheduled maintenance.

It's made to solve the problems that plague small engines, including wear, power loss, oil consumption, harmful carbon deposits and stuck

rings and valves, helping you get more work done and save money.

Reserve protection

AMSOIL Synthetic Small-Engine Oil is a long-life formulation that has repeatedly demonstrated its ability to safely exceed OEM drain intervals in the toughest conditions. Extensive severe-service testing proves its ability to provide service life of up to 200 hours or the manufacturer's longest recommendation. It provides an extra measure of protection when equipment goes longer between oil changes than is recommended by the OEM.

Applications

Use the appropriate viscosity of AMSOIL Synthetic Small-Engine Oil in small engines found in (not limited to) tractors, lawn and garden equipment, compactors, pumps, light towers, log splitters, welders, cement mixers and trowels, skid-steers, excavators, rototillers and compressors.

- Long service life
- Helps extend engine life
- Inhibits rust




See page 39 to order.

EVERYTHING YOUR HARLEY NEEDS, INCLUDING BETTER PROTECTION

Customers asked for more V-twin oil-change kits, and we've delivered. Four kits are now available, including kits with an extra quart of oil for larger Milwaukee-Eight* engines or a black oil filter instead of chrome. And, as always, Synthetic V-Twin Motorcycle Oil delivers **excellent protection against extreme heat** so you have **peace of mind your bike is protected.**

AMSOIL Resists Viscosity Breakdown

AMSOIL resists viscosity breakdown **6X better** than Harley-Davidson* SYN3* for **improved protection** against compensator and transmission gear wear.^{BB}

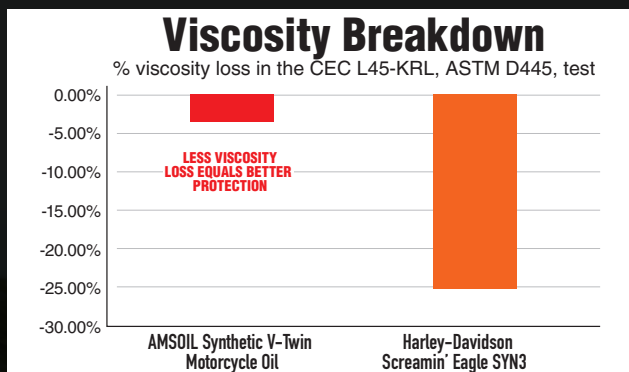

^{BB}Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

AMSOIL V-Twin Oil Change Kits include...

- 4-5 quarts of 20W-50 Synthetic V-Twin Motorcycle Oil (MCV)
- 1 chrome or black AMSOIL Motorcycle Oil Filter (EAOM103/EAOM103C)
- 1 drain-plug O-ring



Check out the Motorcycle Product Guide at amsoil.com to find the right kit for your Harley-Davidson.

Synthetic ATV/UTV Motor Oil

- Protection for demanding chores and terrain
- Superior all-weather performance
- Wet-clutch compatible

Find the right kit for your machine by using our product guides at AMSOIL.com/guides.



See page 35 to order.

Combines everything needed to perform an AMSOIL oil change on most Can-Am* ATV/UTV models in one convenient package.



See page 35 to order.

Combines everything needed to perform an AMSOIL oil change on the most popular Polaris* ATV/UTV models in one convenient package.



See page 38 to order.

Powersports Antifreeze & Coolant

- Pre-mixed 50/50 with high-purity water
- Extended-life formulation lasts up to five years
- Ethylene-glycol formulation meets OEM requirements
- Boil-over protection up to 226°F (108°C)
- Freeze protection down to -34°F (-37°C)

ATVs & UTVs Require a Little Oil to Do a Lot of Work

Like their automotive counterparts, UTVs and ATVs produce more power with each new model year. Manufacturers keep finding ways to increase power per cubic inch by using lighter-weight components, more precise fuel delivery and other innovations.

A typical 900-cc UTV puts out about 80 hp, with some easily eclipsing that number. For example, a Polaris* RZR* 1000, one of the most popular machines available, puts out a whopping 110 hp.

While enthusiasts and homeowners have no trouble finding ways to put all this power to use, sometimes lost in the equation is how little motor oil some of these machines use. Most rely on just 2-2.5 quarts of motor oil to protect against wear, help dissipate heat and keep parts

clean. If the oil isn't up to the challenge, the extreme heat and stress of working hard or riding aggressively can quickly break down the oil and lead to wear and harmful deposits.

Inside the engine, churning parts combined with elevated heat create shearing forces that can tear apart, or shear, the molecular structure of the oil. Additionally, the intense pressure the oil undergoes as it is repeatedly forced through tight clearances, such as the interfaces of the piston ring/cylinder wall and cam lobe/lifter, also causes viscosity loss due to shear. Oil that has sheared out of its intended viscosity range can fail to form a protective lubricating film on critical engine parts, leading to accelerated wear.

Low-quality oil also tends to break down and create harmful deposits when faced with extreme heat and stress. Deposits can cause the rings to stick, reducing engine compression, which results in lost horsepower. Deposits also inhibit heat-transfer and reduce efficiency, eroding the like-new feeling you want when riding.

Differentials are no different

The same principle applies inside the differentials, which are easy to overlook when it comes to maintenance.

Every time you tow a loaded trailer, plow snow or lay into the throttle on a joy ride, all that engine power flows through the differential gears and bearings. The pinion gear can force extreme pressure on the ring gear, which can break the lubricant film and cause metal-to-metal



See page 35 to order.

AMSOIL Synthetic ATV/UTV Transmission & Differential Fluid

- Protection for demanding chores and terrain
- Protects heavily loaded, high-torque gears
- Superior all-weather protection

AMSOIL ATV/UTV Powertrain Fluid

- High-performance alternative to Polaris Demand Drive Fluid* and Polaris AGL Synthetic Gearcase Lubricant and Transmission Fluid*

contact. Heat also increases, which causes the gear lube to break down and fail to provide good protection. Submerging differentials in water also invites water contamination, which reduces the oil's effectiveness. The front differentials on many machines hold only one-third to one-half a quart of gear lube. The same holds for rear differentials that don't share a sump with the transmission.

Given the thousands of dollars you invest in your rig, it pays to use the best lubricants money can buy to ensure your machine stays up and running no matter how hard you push it.

AMSOIL UTV Torture Test

To demonstrate the ability of AMSOIL Synthetic ATV/UTV Oil to protect in the toughest conditions, we installed it in a 2018 Polaris Ranger* and ran it on an engine dyno for 100 hours (4,000 miles [6,437 km]) at wide-open throttle (6,000 rpm). Engine oil temperature reached 280°F (138°C). Afterward, the

engine teardown revealed that AMSOIL Synthetic ATV/UTV Motor Oil maintained viscosity and delivered flawless protection. As the image shows, the oil protected against piston scuffing despite extreme conditions. The piston-skirt coating remained intact, while the piston crown and ring lands demonstrated no abnormal deposits or stress. The piston rings remained free and didn't stick for maximum engine compression and power. For complete results, check out the UTV Torture Test video at youtube.com/amsoilinc. Enter "UTV" in the search.

Next time your UTV or ATV is ready for scheduled maintenance, switch to AMSOIL synthetic ATV/UTV lubricants to ensure superior protection and performance for your expensive machine. We offer a full line of products for whatever make or model you own.

"AMSOIL products are the best on the market and definitely give us an added performance factor."

Bryce Menzies
Professional Off-Road Driver



The piston skirt contained no scuffing and appears like-new, while the piston crown demonstrated no abnormal deposits following 100 severe-service hours.



Half-Million-Mile VW* Beetle* Still Running Strong

Most people can't believe it when Randy Melvin tells them his 2000 Volkswagen Beetle has 500,000 miles (804,700 km) on it. The UPS tractor-trailer driver from Troutman, N.C. commutes 125 miles (201 km) round trip between home and Winston-Salem, N.C. each day. When it came time to purchase a new vehicle back in 1999, he opted for a VW TDI due to its high estimated fuel economy, despite the car's poor reviews.

"If you go back to the *Consumer Reports* reviews on that 2000 Beetle, they're terrible," said Melvin. "My dad said, 'Why are you getting that? The reviews are so bad.'" But Melvin knew a Volkswagen mechanic nearby whom he trusted, and he wanted the fuel-economy benefits of a diesel.

"At the time, the Volkswagen TDI was hard to get a hold of; you had to be in the right place at the right time," said Melvin. After 20 years, the 1.9L turbodiesel five-speed manual still gets 46 mpg.

AMSOIL exclusively since almost day one

After buying the car, the dealership performed the first three oil changes using Castrol.* Then Melvin switched to AMSOIL synthetic diesel oil exclusively and today uses Signature Series 5W-30 Max-Duty Synthetic Diesel Oil.

A shop mechanic and AMSOIL Preferred Customer with whom Melvin worked piqued his interest in AMSOIL products after sharing a testimonial about a truck

driver who'd eclipsed 1 million miles using AMSOIL products.

The car has run excellent all these years. Melvin hasn't performed any engine maintenance, except replacing the alternator, air compressor and routine timing-chain service.

"It's proven to me, especially if you can get a half-million miles with no engine failure whatsoever," he said. "The thing runs just as powerfully as it ever did." Melvin used to have a pre-owned 2001 Volkswagen with the same 1.9L diesel engine. "It only had 192,000 miles (309,000 km), but my 2000 would have run circles around it."

People can't believe it

How do people react to his story? "They just can't believe [the car] has half a million miles on it," said Melvin. "Because I've worked at night the entire 20 years I've owned the car, it sits in the garage mainly in the daytime, so it pretty much looks like a brand-new car.



"I change oil every 10,000 miles (16,000 km), and with conventional oil changing every 3,000 (4,800 km), you're going to spend more money, not counting the labor. To me, it's a no-brainer."

Drive it until it quits

"I've always believed you should drive a car until it quits," said Melvin. "To me, buying a car every two to three years isn't beneficial." With the help of AMSOIL products, it may be a while before Melvin's Beetle quits running. "I just think it's a good product. It's proven to me, and I can tell that to anybody," he said. "I'll probably work until I'm 62, so I hope to put at least another 150,000 miles (241,000 km) on it."



Watch how to use AMSOIL Engine & Transmission Flush at youtube.com/user/AMSOILinc. Just search "Flush."

PRODUCT SPOTLIGHT:

AMSOIL ENGINE AND TRANSMISSION FLUSH

WHAT IS IT?

- A detergent-based additive designed to clean deposits and sludge from your engine

WHAT DOES IT DO?

- **Prepares engines and transmissions for new oil** by cleaning harmful sludge and other contaminants left behind by inferior oils or neglect
- **Maximizes fuel economy** by helping remove deposits to ensure parts move efficiently
- **Helps reduce oil consumption** by freeing sticky rings and valves to reduce blow-by and emissions
- **Helps quiet** lifter noise
- **Helps reduce heat** by cleaning deposits that restrict heat-transfer

IS FLUSHING MY ENGINE NECESSARY?

- While it's **not a required step** before switching to AMSOIL synthetic motor oil or transmission fluid, it helps prepare your engine or transmission for new oil. If you've been using AMSOIL synthetic lubricants exclusively, flushing prior to an oil change won't provide as noticeable a benefit as if you've been using a low-quality oil. However, flushing before each oil change **ensures you derive the greatest benefits from the new oil.**

HOW DO I USE IT?

- Flushing your engine is **simple and only takes 10-15 minutes.** Check out our how-to video at youtube.com/user/AMSOILinc. Just search "Flush."



Synthetic Gasoline Motor Oil

Signature Series Fights Wear

AMSOIL Signature Series Synthetic Motor Oil provides **75 percent more engine protection against horsepower loss and wear** than required by a leading industry standard^A, extending the life of vital components like pistons and cams.

^ABased on independent testing in the ASTM D6891 test using 0W-20 as worst-case representation.

AMSOIL Keeps Pistons Cleaner


Even after doubling the length of the industry-standard test, AMSOIL delivered **40% cleaner pistons** than required by the standard.^{FF}



^{FF}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

Signature Series Delivers Powerful Protection

AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 100,000-mile (160,934-km) test^F. AMSOIL provided far superior wear protection and kept bearings looking like new.

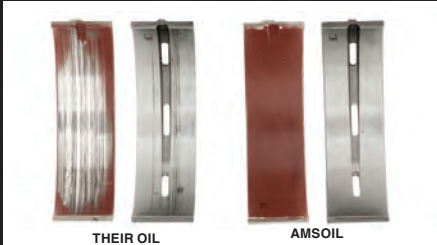

^FTesting conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.

AMSOIL Resists Viscosity Increase

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL **delivered twice the viscosity control** required by the standard.^{GG}

^{GG}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

Signature Series Helps Keep Valves Clean

AMSOIL fights volatility^J **38% better** than Mobil 1[®] and **17% better** than Royal Purple[®], helping reduce oil consumption and keep valves clean.

^JBased on independent testing of AMSOIL Signature Series Synthetic 5W-20, Mobil 1[®] Advanced Synthetic 5W-20, Royal Purple[®] High Performance Synthetic 5W-20 in ASTM D5800. Oils purchased Oct.-Nov. 2018.



Signature Series



Signature Series Synthetic Motor Oil

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 25,000 miles (40,200 km) or 1 year, whichever comes first.

● 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASMQT	EA	1 Quart	10.00	12.70
ASMQT	CA	12 Quarts	113.90	144.90
ASM1G	EA	1 Gallon	39.25	49.35
ASM1G	CA	4 Gallons	149.35	187.95

● 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ALMQT	EA	1 Quart	10.00	12.70
ALMQT	CA	12 Quarts	113.90	144.90
ALM1G	EA	1 Gallon	39.25	49.35
ALM1G	CA	4 Gallons	149.35	187.95

● 0W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AZQQT	EA	1 Quart	10.00	12.70
AZQQT	CA	12 Quarts	113.90	144.90
AZQ1G	EA	1 Gallon	39.25	-
AZQ1G	CA	4 Gallons	149.35	-

● 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASLQT	EA	1 Quart	10.00	12.70
ASLQT	CA	12 Quarts	113.90	144.90
ASL1G	EA	1 Gallon	39.25	49.35
ASL1G	CA	4 Gallons	149.35	187.95

● 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM LL-A-025, 6094M, 4718M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATMQT	EA	1 Quart	10.00	12.70
ATMQT	CA	12 Quarts	113.90	144.90
ATM1G	EA	1 Gallon	39.25	-
ATM1G	CA	4 Gallons	149.35	-

● 0W-40

Use in vehicles that require API SP, SN-PLUS, SN... • Chrysler MS-12633, MS-10725, MS-10850; Nissan GT-R

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AZFQT	EA	1 Quart	10.00	12.70
AZFQT	CA	12 Quarts	113.90	144.90

○ 5W-50


Use in vehicles that require API SP, SN-PLUS, SN... • Ford WSS-M2C931-C (Mustang)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMRQT	EA	1 Quart	10.00	12.70
AMRQT	CA	12 Quarts	113.90	144.90

Signature Series Fights Viscosity Breakdown

AMSOIL fights viscosity breakdown **better than the competition**⁹, providing superior protection of pistons, cams and bearings.

VISCOSITY BREAKDOWN
Represented By % Viscosity Lost In The Kurt Orbahn Test

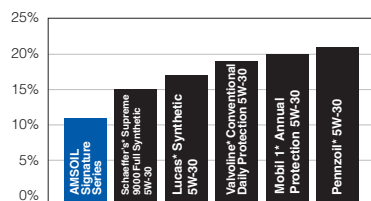

⁹Based on independent testing of AMSOIL Signature Series, Schaeffer's Supreme 9000 Full Synthetic, Lucas Synthetic, Valvoline Conventional Daily Protection, Mobil 1 Annual Protection and Pennzoil 5W-30 in the Kurt Orbahn Test. Oils purchased on 5/3/18.

Signature Series Guards Turbos

Signature Series protects turbochargers **72% better** than required⁹ by the GM dexos1[®] Gen 2 specification.

⁹Based on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.

Signature Series Protects Against LSPI

AMSOIL synthetic motor oils achieved **100% protection** against LSPI.⁹

⁹Based on zero LSPI events in five consecutive tests of AMSOIL Signature Series, XL and OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.

Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents⁹ to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge^{9d}.

^{9d}vs. AMSOIL OE Motor Oil
^{9d}Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6393 engine test for oil screen plugging as required by the API SN PLUS specification.

AMSOIL Helps Keep Engines Cleaner

AMSOIL Signature Series is fortified with a heavy treatment of detergent additives, delivering **28 percent more acid-neutralizing power** than Mobil 1* and helping engines stay cleaner, longer.¹⁴

¹⁴Based upon independent testing of Mobil 1 Annual Protection Full Synthetic 5W-30 and AMSOIL Signature Series 5W-30 in ASTM D2896. Oils purchased July 2020. All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • WWW.AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$8.99 (\$11.99 Can.).






“I have been using AMSOIL in particular the XL series for many years. I have 2 vehicles over 500,000 km. Both vehicles are running good. The engine is going to outrun the rusty body!”

– Henry
Alberta

XL Resists Oil Breakdown


XL provides **64% more protection** against oil breakdown^F than required by the GM dexos1® Gen 2 specification.

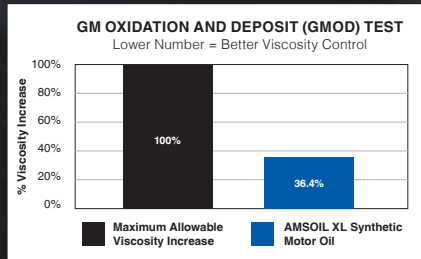


^FBased on independent testing of AMSOIL XL 5W-30 motor oil in the GMOD engine test required for the GM dexos1 Gen2 specification.

OE Protects Against Wear

OE provides **47 percent more** wear protection.^G

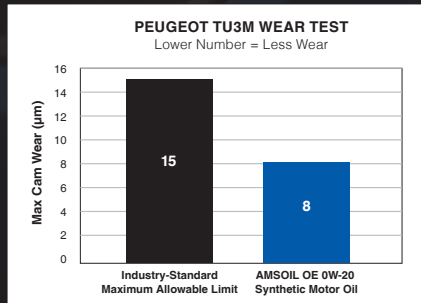

^GBased on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.

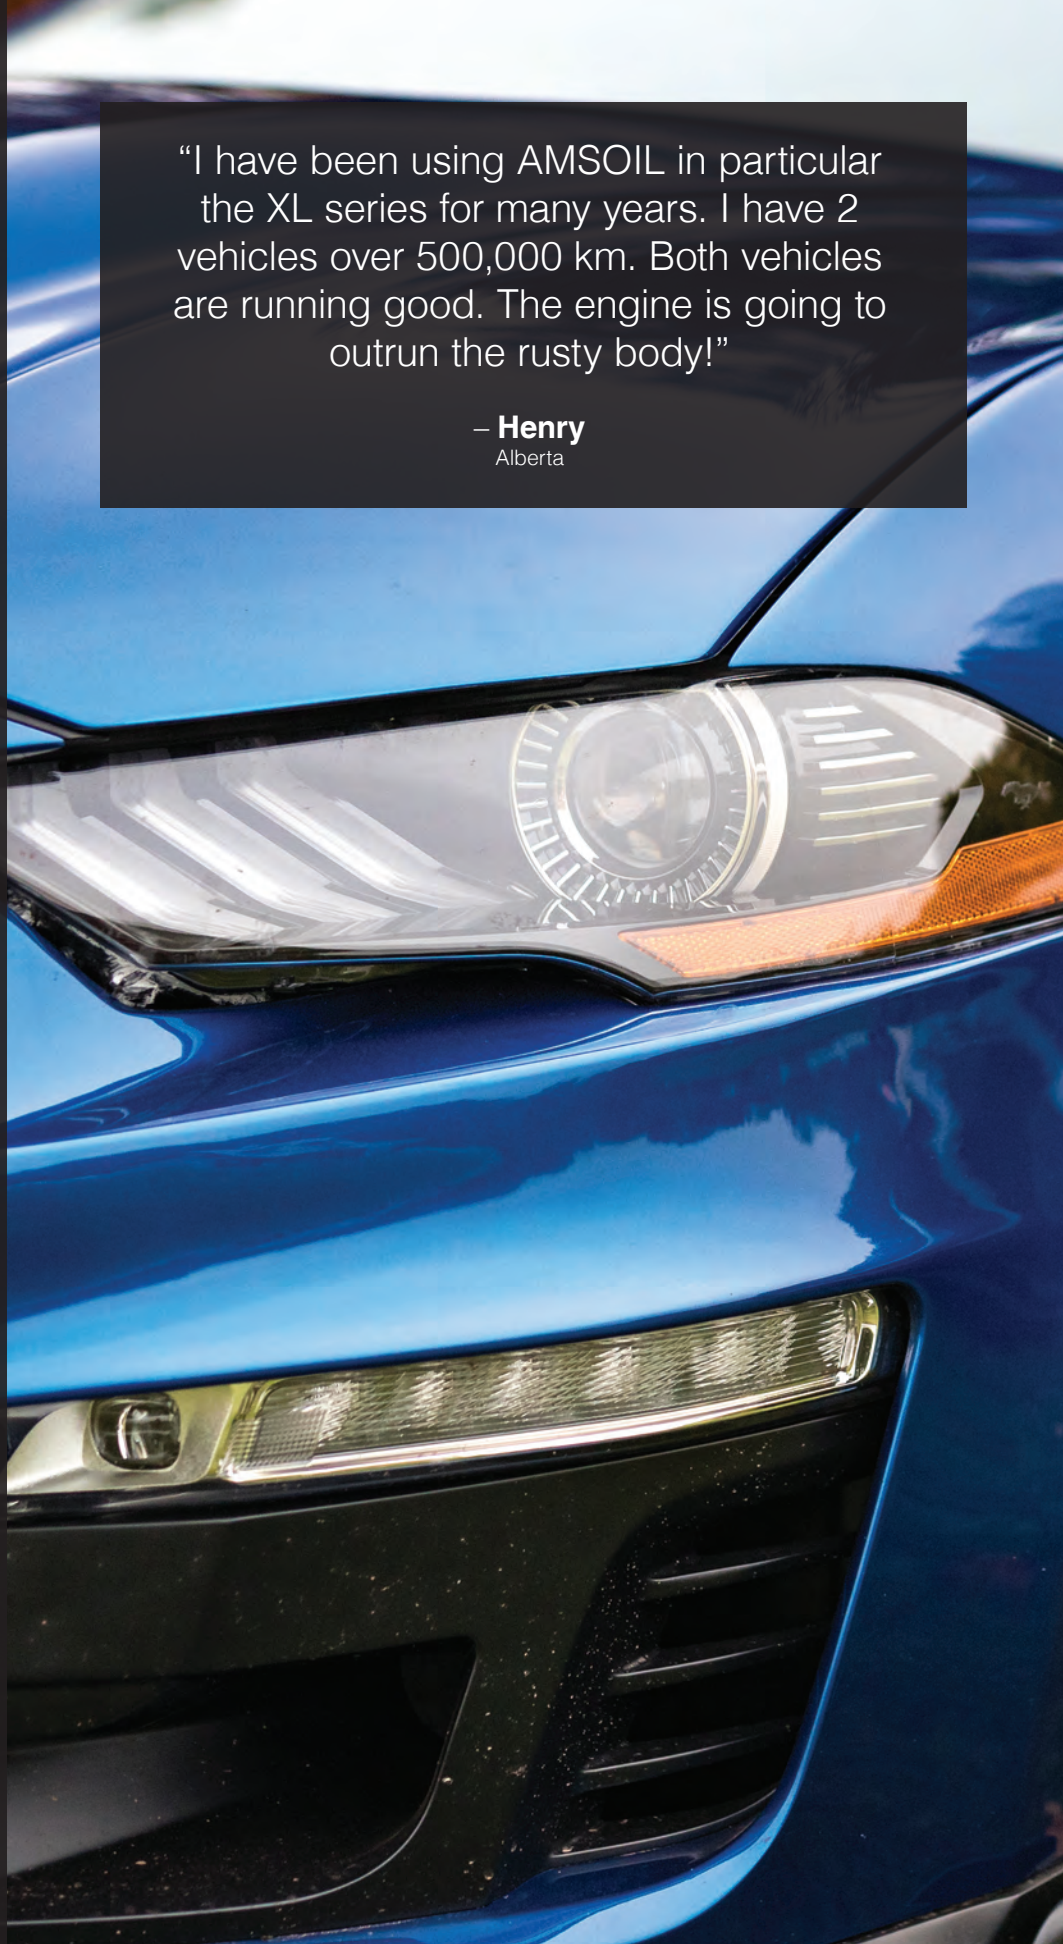



XL Synthetic Motor Oil

For enthusiasts who want to do something extra for their vehicle. Engineered for advanced automotive technology, including turbos and direct injection. Boosted formulation delivers more cleaning power and promotes longer engine life. Extra protection that lasts up to 12,000 miles (19,300 km) or 1 year, whichever comes first.

● XL 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLZQT	EA	1 Quart	7.25	9.50
XLZQT	CA	12 Quarts	82.85	108.40
XLZ1G	EA	1 Gallon	28.35	37.15
XLZ1G	CA	4 Gallons	107.95	141.35

● XL 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLMQT	EA	1 Quart	7.25	9.50
XLMQT	CA	12 Quarts	82.85	108.40
XLM1G	EA	1 Gallon	28.35	37.15
XLM1G	CA	4 Gallons	107.95	141.35

● XL 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLFQT	EA	1 Quart	7.25	9.50
XLFQT	CA	12 Quarts	82.85	108.40
XLF1G	EA	1 Gallon	28.35	37.15
XLF1G	CA	4 Gallons	107.95	141.35

● XL 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM 6094M, 4718M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLTQT	EA	1 Quart	7.25	9.50
XLTQT	CA	12 Quarts	82.85	108.40
XLT1G	EA	1 Gallon	28.35	-
XLT1G	CA	4 Gallons	107.95	-

○ XL 10W-40

Use in vehicles that require API SP, SN-PLUS, SN... • ACEA A3/B3, A3/B4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLOQT	EA	1 Quart	7.25	9.50
XLOQT	CA	12 Quarts	82.85	108.40
XLO1G	EA	1 Gallon	28.35	-
XLO1G	CA	4 Gallons	107.95	-

Tough-to-reach fill hole?

Order a flexible pour spout with your oil to make the job easier. Fits quarts and gallons.

STOCK#	U.S. P.C.	CAN. P.C.
G1230	0.70	0.95



OE Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

● OE 0W-16

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6B

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OESQT	EA	1 Quart	5.45	7.20
OESQT	CA	12 Quarts	62.25	81.90

● OE 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEZQT	EA	1 Quart	5.45	7.20
OEZQT	CA	12 Quarts	62.25	81.90
OEZ1G	EA	1 Gallon	21.40	28.00
OEZ1G	CA	4 Gallons	81.35	106.50

● OE 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEMQT	EA	1 Quart	5.45	7.20
OEMQT	CA	12 Quarts	62.25	81.90
OEM1G	EA	1 Gallon	21.40	28.00
OEM1G	CA	4 Gallons	81.35	106.50

● OE 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 2 (supersedes LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEFQT	EA	1 Quart	5.45	7.20
OEFQT	CA	12 Quarts	62.25	81.90
OEF1G	EA	1 Gallon	21.40	28.00
OEF1G	CA	4 Gallons	81.35	106.50

● OE 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM 6094M, 4718M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OETQT	EA	1 Quart	5.45	7.20
OETQT	CA	12 Quarts	62.25	81.90

Oil Analyzers

AMSOIL offers oil analysis service options from Oil Analyzers Inc.® By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit www.oaitesting.com.

STOCK#	PKG./SIZE	U.S. P.C.	CAN. P.C.
KIT01	1 sample kit (includes two-way postage) - U.S.	28.35	-
KIT02	1 sample kit (includes UPS shipping) - U.S.	28.35	-
KIT06	1 sample kit - U.S.	20.50	-
KIT14	1 value sample kit - U.S.	15.70	-
KIT401	1 sample kit (includes UPS shipping) - CAN.	-	52.05
KIT402	1 sample kit - CAN.	-	32.45
G1206	Oil Suction Pump w/10-ft. hose	26.25	34.85
G1571	Replacement Hose 25-ft.	8.35	11.00

Synthetic European Motor Oil



“My engine sounds better than it ever has. My BMW* has 70,000+ miles and has never sounded this good or smooth. You can tell a lot about engines just from the sound and this baby is purring like I’ve never heard it purr. I am very pleased and glad I made the switch to AMSOIL.”

– **Tom**
Atlanta, Ga.



Synthetic European Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks.

● 5W-30 LS¹³

Manufacturer Approvals: VW 504.00/507.00

Use in vehicles that require API SN • ACEA C3 • GM dexos2 • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AELQT	EA	1 Quart	10.65	13.55
AELQT	CA	12 Quarts	121.15	154.35
AEL1G	EA	1 Gallon	41.75	—
AEL1G	CA	4 Gallons	159.00	—

● 5W-40 MS

Manufacturer Approvals: MB 229.51 • Porsche A40

Use in vehicles that require ACEA C3 • API SN/SM/CF... • BMW LL-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2 (supersedes LL-A-025 and LL-B-025) • Renault RN0700/RN0710 • VW/Audi 502.00/505.01

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFLQT	EA	1 Quart	9.45	12.45
AFLQT	CA	12 Quarts	107.45	141.75
AFL1G	EA	1 Gallon	36.95	48.30
AFL1G	CA	4 Gallons	140.70	184.00

● 0W-40 FS

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • MB 229.1/229.3/229.5 • Porsche A40 • Renault 0710, 0700 • VW/Audi 502.00/505.00

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EFOQT	EA	1 Quart	8.85	11.25
EFOQT	CA	12 Quarts	100.80	128.55

● 5W-40 FS¹³

Manufacturer Approvals: MB 229.5 • Porsche A40 • VW/Audi 502.00/505.00

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • Renault 0710, 0700

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EFMQT	EA	1 Quart	6.85	9.00
EFMQT	CA	12 Quarts	78.15	102.70
EFM1G	EA	1 Gallon	26.95	35.20
EFM1G	CA	4 Gallons	102.50	134.00

● 0W-20 LS-VW¹³

Use in vehicles that require API SN-PLUS, SN... • ACEA C5 • VW 508.00/509.00

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EZTQT	EA	1 Quart	9.35	12.45
EZTQT	CA	12 Quarts	106.50	141.75


● 0W-20 LS

Use in vehicles that require API SN-PLUS (Resource Conserving), SN, SM... • ILSAC GF-5, GF-4... • ACEA C5, A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFEQT	EA	1 Quart	8.10	10.90
AFEQT	CA	12 Quarts	92.30	124.15


¹³See page 47 for Proposition 65 information for this product.

Synthetic Classic/Collector Car Motor Oil

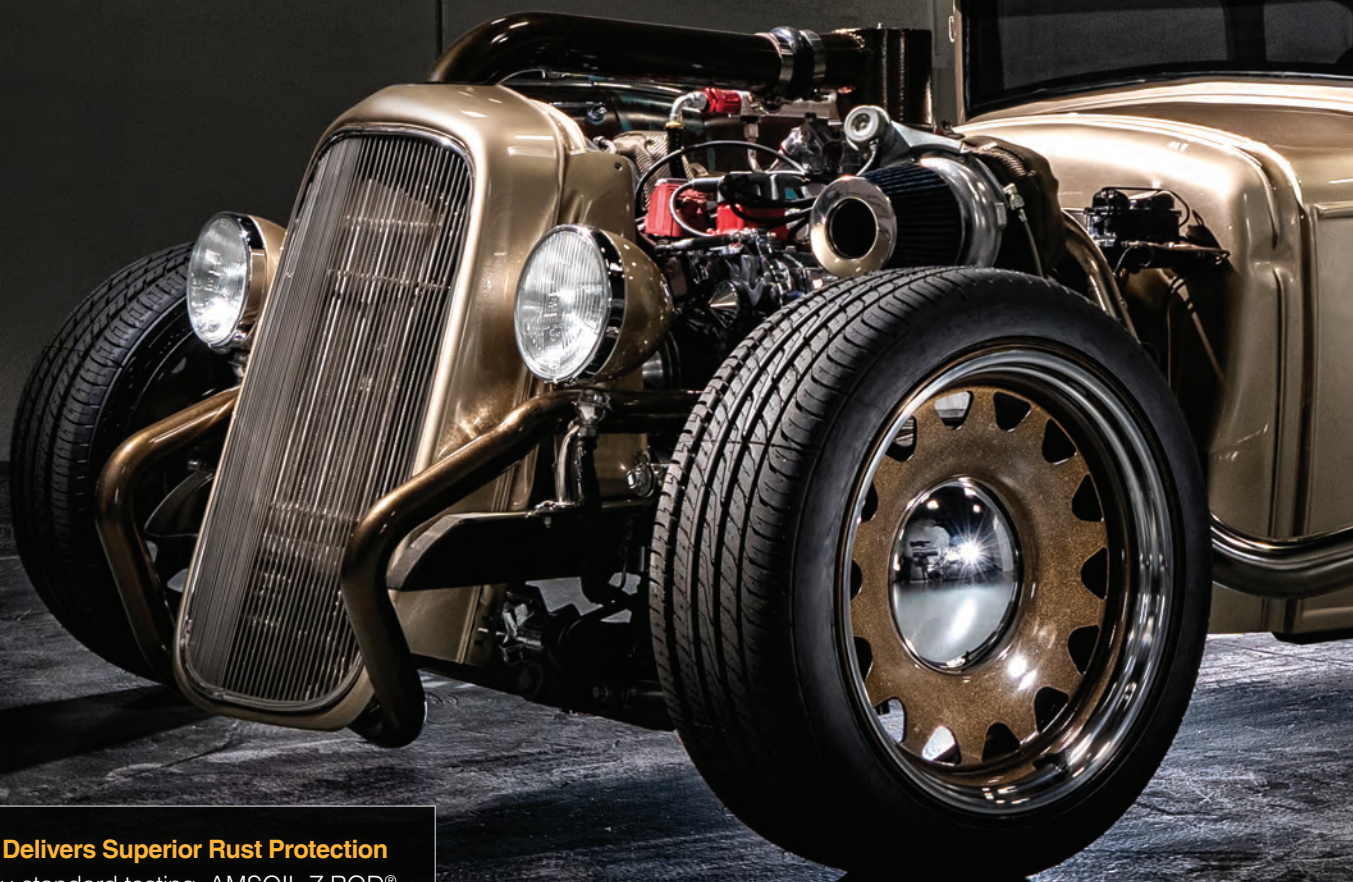

AMSOIL Delivers Superior Rust Protection

In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.^{1,2}

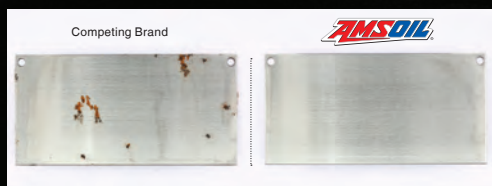

^{1,2}Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.



Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.

● 10W-30

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRTQT	EA	1 Quart	9.00	11.50
ZRTQT	CA	12 Quarts	102.55	131.05

● 10W-40

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRDQT	EA	1 Quart	9.00	11.50
ZRDQT	CA	12 Quarts	102.55	131.05

● 20W-50

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRFQT	EA	1 Quart	9.35	11.95
ZRFQT	CA	12 Quarts	106.65	136.10

Assembly Lube¹⁷

Formulated to cling to engine parts and provide exceptional wear protection in newly built or rebuilt high-performance, racing and other four-stroke engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EALTB	EA	(1) 4-oz. Tube	7.65	9.65
EALTB	CA	(12) 4-oz. Tubes	87.15	110.25

● Break-In Oil¹⁷

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
BRKQT	EA	1 Quart	6.80	8.80
BRKQT	CA	12 Quarts	77.50	100.20

Premium Protection Synthetic Motor Oil

Ideal for gasoline engines and diesel applications not equipped with diesel particulate filters (DPF), where the extra protection of a high-zinc and TBN formula is desired.

● 10W-40

Use in vehicles that require API CI-4+/SL... • ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo VDS-2, VDS • Mack EO-M+ • ACEA A3/B3/E3/E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMOQT	EA	1 Quart	9.05	11.75
AMOQT	CA	12 Quarts	103.20	134.20
AMO1G	EA	1 Gallon	35.50	-
AMO1G	CA	4 Gallons	135.05	-
AMOTP	EA	(1) 2.5 Gallon	87.55	-
AMOTP	CA	(2) 2.5 Gallons	166.70	-

● 20W-50

Use in vehicles that require API CI-4+/SL... • ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo VDS-2, VDS • Mack EO-M+ • ACEA A3/B3/E3/E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AROQT	EA	1 Quart	9.15	11.90
AROQT	CA	12 Quarts	104.45	135.45
ARO1G	EA	1 Gallon	35.90	-
ARO1G	CA	4 Gallons	136.75	-

¹⁷See page 47 for Proposition 65 information for this product.

Synthetic Racing Oil



“AMSOIL products are the best on the market and definitely give us an added performance factor.”


– Bryce Menzies
Professional Off-Road Driver

DOMINATOR® Protects Better

DOMINATOR 20W-50 Competition Diesel Oil delivers **50% more** film thickness^H to withstand high cylinder pressures and protect against wear.

HIGH-TEMPERATURE/HIGH-SHEAR (HTHS) VISCOSITY

Higher = Better Wear Protection

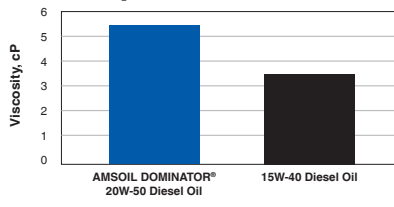

^HCompared to the 3.5 cP HTHS limit for SAE 15W-40.





¹⁷See page 47 for Proposition 65 information for this product.

DOMINATOR® Synthetic Racing Oil

Superior performance and maximum protection in high-performance and racing applications.

● 5W-20¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD20QT	EA	1 Quart	11.15	14.15
RD20QT	CA	12 Quarts	127.30	161.30

● 10W-30¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD30QT	EA	1 Quart	10.80	13.75
RD30QT	CA	12 Quarts	123.05	156.90

● 15W-50¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD50QT	EA	1 Quart	11.35	14.40
RD50QT	CA	12 Quarts	129.35	164.45
RD501G	EA	1 Gallon	44.60	—
RD501G	CA	4 Gallons	169.90	—

● SAE 60¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD60QT	EA	1 Quart	11.70	14.85
RD60QT	CA	12 Quarts	133.25	169.50

● 20W-50 Synthetic Competition Diesel Oil

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DCOQT	EA	1 Quart	9.25	—
DCOQT	CA	12 Quarts	105.25	—
DCO1G	EA	1 Gallon	36.20	47.05
DCO1G	CA	4 Gallons	137.80	179.15

● Briggs & Stratton Synthetic 4T Racing Oil¹⁷

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GBS2960	EA	1 Quart	11.25	14.95
GBS2960	CA	12 Quarts	134.90	179.40

Ea® Racing Air Filters

Discontinued and available while supplies last.
Specially designed for carbureted racing and street rod applications, providing higher dirt-holding capacity, lower pressure drop and greater airflow and efficiency. Cleanable and remain serviceable for long filter life.

See AMSOIL.com or call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

Ea® Pre-Filters

Discontinued and available while supplies last.
Constructed of woven mesh and designed to fit over the top of Ea Racing and Air Induction Filters, preventing large particles from sticking to them and blocking airflow. Easily removed and shaken free of debris in seconds. Cleanable and remain serviceable for up to one year.

See AMSOIL.com or call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

Ea® Universal Air Induction Filters

Discontinued and available while supplies last.
Fit most popular air intake systems on the market, providing improved cold air intake and excellent efficiency for superior engine protection and performance. Cleanable and remain serviceable for long filter life.

See AMSOIL.com or call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

Synthetic Diesel Oil




Keeps Turbos Clean

Signature Series Max-Duty Synthetic Diesel Oil provides protection boosted to the max, delivering up to **60% better turbo cleanliness¹** and withstanding the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower.

¹Based on specification standards of CAT C13 2nd Ring Top Land Carbon testing.

AMSOIL Fights Wear

AMSOIL delivers **powerful engine protection**. How good is it? In independent testing compared to a leading brand, AMSOIL provided long-lasting wear protection, **keeping cylinder liners looking like new.**^{DD}

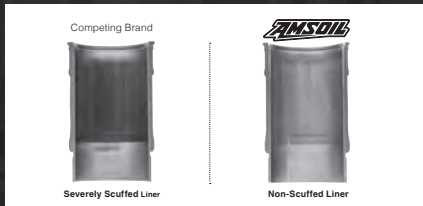

^{DD}Based on independent testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel[®] DD13 Scuffing test for specification DFS 93K222.


Protects Against Rust

Signature Series Max-Duty Synthetic Diesel Oil provides up to **2X better rust protection.**^K

^KBased on industry standard testing using the NIMMA FC-W Rust Test.

Reduces Oil Consumption

Heavy-Duty Synthetic Diesel Oil provides up to **66% less** oil consumption, while Signature Series Max-Duty Synthetic Diesel Oil provides up to **76% less** oil consumption.^L

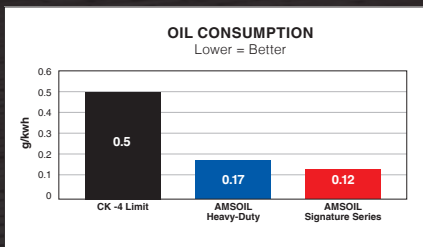

^LThan required by the API CK-4 standard in the Caterpillar-1N oil consumption test.

DHD



Signature Series Max-Duty Synthetic Diesel Oil

The top tier of AMSOIL protection and performance for diesel engines. Provides 6X more engine protection.¹

5W-30

Use in vehicles that require API CK-4/SN, SN+, CJ-4... · ACEA E9, E7, E6 · Mack EOS-4.5, EO-O · DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.51, 228.31 · MTU Type 3.1, 2.1, II, I · MAN 3677, 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC IV-10 LA, DQC III-10 LA · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C214-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DHDQT	EA	1 Quart	9.30	12.15
DHDQT	CA	12 Quarts	106.00	138.60
DHD1G	EA	1 Gallon	36.45	47.70
DHD1G	CA	4 Gallons	138.85	181.65
DHDT	EA	(1) 2.5 Gallon	90.05	-
DHDT	CA	(2) 2.5 Gallons	171.45	-

DDT



10W-30

Use in vehicles that require API CK-4/SN, CJ-4... · Volvo VDS4.5, VDS4, VDS3 · Mack EOS-4.5, EO-O · Renault RLD-4, RLD-3 · Cummins CES20086, CES20081 · Caterpillar ECF-2, ECF-3, ECF-1-a · DFS 93K222, DDC 93K218, 93K215, 93K214 · ACEA E9, E7 · MB 228.31 · MAN 3575 · MTU Type 2.1, II, I · JASO DH-2 · Deutz DQC III-10LA · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DDT1G	EA	1 Gallon	34.00	44.45
DDT1G	CA	4 Gallons	129.40	169.30
DDTTP	EA	(1) 2.5 Gallon	83.80	-
DDTTP	CA	(2) 2.5 Gallons	159.60	-

DZF



0W-40

Delivers **4X better cold-temperature performance** when compared to SAE 15W-40 oil in ASTM D5293 Cold Cranking Viscosity test.

Use in vehicles that require API CK-4/SN, CJ-4... · ACEA E9, E7 · Mack EOS-4.5, EO-O · DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DZFT	EA	1 Quart	9.00	11.75
DZFT	CA	12 Quarts	102.55	134.20
DZF1G	EA	1 Gallon	35.25	46.10
DZF1G	CA	4 Gallons	134.20	175.60

DEO



5W-40

Use in vehicles that require API CK-4/SN, CJ-4... · ACEA E9, E7 · Mack EOS-4.5, EO-O · DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DEOQT	EA	1 Quart	8.95	11.70
DEOQT	CA	12 Quarts	102.10	133.60
DEO1G	EA	1 Gallon	35.10	45.90
DEO1G	CA	4 Gallons	133.60	174.75
DEOTP	EA	(1) 2.5 Gallon	86.55	113.20
DEOTP	CA	(2) 2.5 Gallons	164.85	215.60

DME



15W-40

Use in vehicles that require API CK-4/SN, CJ-4... · ACEA E9, E7 · Mack EOS-4.5, EO-O · DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DMEQT	EA	1 Quart	8.80	11.55
DMEQT	CA	12 Quarts	100.35	131.70
DME1G	EA	1 Gallon	34.50	45.10
DME1G	CA	4 Gallons	131.25	171.80
DMETP	EA	(1) 2.5 Gallon	85.05	111.25
DMETP	CA	(2) 2.5 Gallons	162.00	211.90

¹than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 5W-30 as worst-case representation.



Heavy-Duty Synthetic Diesel Oil

Outstanding protection and performance for customers seeking an upgrade over conventional and other synthetic diesel oils. Provides 4X more engine protection.¹

● 10W-30

Use in vehicles that require API CK-4, CJ-4... ACEA E9, E7 • Mack EOS-4.5, EO-O, DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADNQT	EA	1 Quart	5.85	7.75
ADNQT	CA	12 Quarts	66.50	88.20
ADN1G	EA	1 Gallon	22.85	-
ADN1G	CA	4 Gallons	86.95	-
ADNTP	EA	(1) 2.5 Gallon	56.00	73.40
ADNTP	CA	(2) 2.5 Gallons	106.60	139.80

● 5W-40

Use in vehicles that require API CK-4, CJ-4... ACEA E9, E7 • Mack EOS-4.5, EO-O, DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADOQT	EA	1 Quart	6.15	8.20
ADOQT	CA	12 Quarts	70.25	93.25
ADO1G	EA	1 Gallon	24.15	31.80
ADO1G	CA	4 Gallons	92.00	121.00
ADOTP	EA	(1) 2.5 Gallon	59.30	78.05
ADOTP	CA	(2) 2.5 Gallons	112.90	148.60

● 15W-40

Use in vehicles that require API CK-4, CJ-4... ACEA E9, E7 • Mack EOS-4.5, EO-O, DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADPQT	EA	1 Quart	5.90	7.80
ADPQT	CA	12 Quarts	67.30	88.85
ADP1G	EA	1 Gallon	23.10	30.35
ADP1G	CA	4 Gallons	88.00	115.50
ADPTP	EA	(1) 2.5 Gallon	56.65	74.30
ADPTP	CA	(2) 2.5 Gallons	107.90	141.45

100% Synthetic Diesel Oil

Provides outstanding protection, performance and fuel economy for smaller American diesel pickups, vans, cars and SUVs. Delivers up to 6X better wear protection than required by a leading industry standard.²

● 0W-20

Use in vehicles that require GM dexosD

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DP020QT	EA	1 Quart	8.40	11.25
DP020QT	CA	12 Quarts	95.95	128.55

● 5W-30

Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSSM2C214-B1 • ACEA C3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DP530QT	EA	1 Quart	8.40	11.25
DP530QT	CA	12 Quarts	95.95	128.55

CI-4+ Synthetic Diesel Oils

Provide outstanding protection for on- and off-road diesel applications not equipped with diesel particulate filters (DPFs), where extra TBN is desired for long service intervals. Try Signature Series Max-Duty (p. 24) or Heavy-Duty Synthetic Diesel Oil (p. 25) for a serious upgrade.

● Series 3000 5W-30 Synthetic Heavy Duty Diesel Oil

Use in vehicles that require API CI-4+/SL... Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HDDQT	EA	1 Quart	10.00	13.15
HDDQT	CA	12 Quarts	114.05	149.95
HDD1G	EA	1 Gallon	39.30	51.35
HDD1G	CA	4 Gallons	149.55	195.55
HDDTP	EA	(1) 2.5 Gallon	97.05	-
HDDTP	CA	(2) 2.5 Gallons	184.80	-

● 15W-40 Synthetic Heavy Duty Diesel and Marine Oil

Use in vehicles that require API CI-4+/SL... Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMEQT	EA	1 Quart	8.50	11.15
AMEQT	CA	12 Quarts	96.90	127.30
AME1G	EA	1 Gallon	33.25	43.50
AME1G	CA	4 Gallons	126.65	165.70
AMETP	EA	(1) 2.5 Gallon	82.05	107.30
AMETP	CA	(2) 2.5 Gallons	156.20	204.35

¹than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 10W-30 as worst-case representation.

²Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation.

Synthetic Transmission Fluid



Signature Series Synthetic ATF

Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants.

● Multi-Vehicle¹⁷

Use in applications that require Allison C-4, TES-389 - BMW 7045E, 8072B, LA 2634, LT 71141 - Chrysler ATF+4, Mopar ASRC, 68089195AA, 68049954AA - Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 - GM DEXRON II, DEXRON III, AutoTrak II - Honda/Acura ATF-Z1 - Hyundai/Kia SP-II, SP-III, Red-1 - IDEMITSU K17 - JASO 1A - JWS 3309, 3314, 3317 - MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F - Mazda ATF-M III, ATF-MV, F-1 - Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 - Mitsubishi SP-II, SP-III, ATF-J2 - Nissan Matic-D, Matic-J, Matic-K, 402 - Saab 3309 - Shell 3403, LA 2634 - Subaru ATF, ATF-HP - Suzuki 3314, 3317 - Texaco ETL-7045E, ETL-8072B, N402 - Toyota Type T, T-II, T-III, T-IV - Voith 55.6335, 55.6336 - Volvo 97340, 97341 - VW/Audi G 052 162, G 052 990, G 055 025 - ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 14C, 16L, 16M, 17C, 20B, 20C, 21L

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATFQT	EA	1 Quart	11.45	14.45
ATFQT	CA	12 Quarts	130.45	165.10
ATFPK	EA	1 Quart Easy-Pack	13.00	16.45
ATFPK	CA	12 Quart Easy-Packs	148.15	187.75
ATF1G	EA	1 Gallon	45.00	-
ATF1G	CA	4 Gallons	171.40	-
ATFTP	EA	(1) 2.5 Gallon	111.40	139.85
ATFTP	CA	(2) 2.5 Gallons	212.10	266.30

● Fuel-Efficient¹⁷

Provides the same benefits as AMSOIL Multi-Vehicle Synthetic Automatic Transmission Fluid in a fuel-efficient formulation engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 - BMW 83 22 0 142 516, 83 22 2 152 426 - Chrysler Mopar 68157995AA, SP-IV, 68218925AB - DSIH 6p805 - Ford MERCON LV, SP ULV - GM DEXRON HP VI, ULV - Honda/Acura DW-1, Type 3.0 - Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M - JASO 1A-LV - JWS 3324 - Mercedes Benz 236.12, 236.14, 236.15, 236.41 - Mitsubishi SP-IV, ATF J3, ATF-PA - Nissan Matic-S, Matic-W - Saab 93 165 147 - Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 - Toyota WS - Volvo 31256774 - VW/Audi G 055 005, G 055 162, G 060 162 - ZF S671 090 255

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATLQT	EA	1 Quart	11.85	15.45
ATLQT	CA	12 Quarts	135.00	176.40
ATLPK	EA	1 Quart Easy-Pack	13.50	17.65
ATLPK	CA	12 Quart Easy-Packs	153.95	201.60
ATL1G	EA	1 Gallon	46.60	-
ATL1G	CA	4 Gallons	177.45	-
ATLTP	EA	(1) 2.5 Gallon	115.40	149.30
ATLTP	CA	(2) 2.5 Gallons	219.75	284.35

OE Synthetic ATF

Resists wear and provides smooth shifts in passenger-car/light-truck automatic transmissions.

● Multi-Vehicle¹⁷

Use in applications that require Allison C-4, TES-389 - BMW 7045E, 8072B, LA 2634, LT 71141 - Chrysler ATF+4, Mopar ASRC, 68089195AA, 68049954AA - Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 - GM DEXRON II, DEXRON III, AutoTrak II - Honda/Acura ATF-Z1 - Hyundai/Kia SP-II, SP-III, Red-1 - IDEMITSU K17 - JASO 1A - JWS 3309, 3314, 3317 - MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339F - Mazda ATF-M III, ATF-MV, F-1 - Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 - Mitsubishi SP-II, SP-III, ATF-J2 - Nissan Matic-D, Matic-J, Matic-K, 402 - Saab 3309 - Shell 3403, LA 2634 - Subaru ATF, ATF-HP - Suzuki 3314, 3317 - Texaco ETL-7045E, ETL-8072B, N402 - Toyota Type T, T-II, T-III, T-IV - Voith 55.6335, 55.6336 - Volvo 97340, 97341 - VW/Audi G 052 162, G 052 990, G 055 025 - ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 16L, 17C, 20B, 21L

¹⁷AMSOIL warrants the use of this product for Chrysler ATF+4 applications above -38°F. Product does not meet the cold temperature requirement of ATF+4 at -40°F. For warranty information, visit www.amsoil.com/warranty.aspx.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OTFQT	EA	1 Quart	7.45	9.80
OTFQT	CA	12 Quarts	85.05	111.55
OTF1G	EA	1 Gallon	29.35	-
OTF1G	CA	4 Gallons	111.75	-
OTFTP	EA	(1) 2.5 Gallon	72.25	94.20
OTFTP	CA	(2) 2.5 Gallons	137.55	179.35

● Fuel-Efficient¹⁷

Provides the same benefits as AMSOIL OE Multi-Vehicle Synthetic Automatic Transmission Fluid in a fuel-efficient formulation engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 - BMW 83 22 0 142 516, 83 22 2 152 426 - Chrysler Mopar 68157995AA, SP-IV, 68218925AB - DSIH 6p805 - Ford MERCON LV - GM DEXRON VI - Honda/Acura DW-1, Type 3.0 - Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M - JASO 1A-LV - JWS 3324 - Mercedes Benz 236.12, 236.14, 236.15, 236.41 - Mitsubishi SP-IV, ATF J3, ATF-PA - Nissan Matic-S, Matic-W - Saab 93 165 147 - Shell M-1375.4, M-1375.5, M-1375.6, M-L12108 - Toyota WS - Volvo 31256774 - VW/Audi G 055 005, G 055 162, G 060 162 - ZF S671 090 255

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OTLQT	EA	1 Quart	7.25	9.55
OTLQT	CA	12 Quarts	82.70	109.00
OTL1G	EA	1 Gallon	28.55	-
OTL1G	CA	4 Gallons	108.60	-
OTLTP	EA	(1) 2.5 Gallon	70.20	92.20
OTLTP	CA	(2) 2.5 Gallons	133.65	175.60

¹⁷See page 47 for Proposition 65 information for this product.

“Changed out the transmission fluid in my GMC* 2500 with the AMSOIL OE. The difference is noticeable with how smooth the truck shifts. Great product.”

— Jimmy
Upstate NY



○ Synthetic CVT Fluid

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

Use in belt- and chain-type CVTs that require BMW EZL 799A (8322 0 136 376 /8322 0 429 154) • Daihatsu Amix CVTF-DG, CVTF-DFE, FCA Mopar CVTF +4 (Mopar CVT 4) • Ford M2C928-A (CFT 23), WSS-M2C933-A (CFT 30, Motorcraft XT-7-QCFT), MERCON C • GM DEX-CVT, GM CVT (CVTF I-Green2) • Honda HMMF (08200-9006), HCF-2 • Hyundai/Kia SP-CVT 1 • Mazda CVTF 3320 • Mercedes Benz 236.20 (001 989 46 03) • Mitsubishi CVTF-J1, CVTF-J4 • Nissan NS-2, NS-3 • Subaru e-CVT, i-CVT F, Lineartronic CV-30, Lineartronic CVTF/CVT-II (K0425Y0710), High Torque CVTF • Suzuki CVT Fluid Green 1, CVT Fluid Green 2 (NS-2), CVTF 3320 (TC) • Toyota/Lexus TC, FE • VW/Audi TL 52180 (G 052 180), TL 52516 (G 052 516)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
CVTQT	EA	1 Quart	10.85	14.20
CVTQT	CA	12 Quarts	123.80	161.95
CVT1G	EA	1 Gallon	42.70	-
CVT1G	CA	4 Gallons	162.55	-

○ 100% Synthetic DCT Fluid

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.

Use in applications that require BMW 83 22 2 148 578, 83 22 2 148 579, 83 22 0 440 214, 83 22 2 147 477, DCTF-1, MTF-LT-5 • Chrysler 68044345 • Citroen/Peugeot 9734.S2 • Ferrari/Shell TF DCTF-3 • Fiat BOT 341 • Ford WSS-M2C936-A, WSS-M2C200-D2, XT-11-QDC • Mercedes Benz 236.21, 236.25 • Mitsubishi Dia-Queen SSTF-I • Nissan GT-R Transmission Oil R35 Special • Pentosin FFL-2, FFL-3, FFL-4 • Porsche 999,917,080,00, 043 207 29, 043 207 30, 000 430 20 • Renault BOT 450 • Volvo 1161838, 1161839 • VW/Audi G 052 182, G 052 529, TL 521 82

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DCTQT	EA	1 Quart	17.05	22.70
DCTQT	CA	12 Quarts	194.40	258.95

○ Synthetic Manual Transmission and Transaxle Gear Lube¹⁵

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

Use in applications that require API GL-4 • ZF TE-ML 02B, 17A, MB 235.5 & MAN 341-Z2 (formerly MAN 341 ML) • Synchronized manual transmissions and transaxles that require 75W-85, 75W-90 or 80W-90 API GL-4 Gear Lube • NV 4500 Transmissions • GM Part #12346190 • Chrysler Part #4874459 • Chrysler Spec MS-9070 • Certain Hyundai, Hino, Infiniti, Kia, Lexus, Mazda, Mitsubishi, Nissan, Suzuki, Toyota & Volkswagen models requiring GL-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MTGQT	EA	1 Quart	14.35	18.25
MTGQT	CA	12 Quarts	163.50	208.55
MTGPK	EA	1 Quart Easy-Pack	15.95	20.35
MTGPK	CA	12 Quart Easy-Packs	182.05	232.50
MTG05	EA	(1) 5-gal. Pail	267.25	339.65

○ Synthetic Synchronesh Transmission Fluid

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers.

Use in applications that require New Venture NV T350, NV1500, NV2500, NV3500, NV3550 & NV5600 • Tremec T4, T5, T18, T56, T176, TK0500, TK0600, TR3550 (GM Vehicles) & TR3450 • Honda Genuine MTF • GM Part #12345349, #12345577, #12377919 & #1052931 • Chrysler Part #4874464 & #4874465 • GM Specs #9985648, #9986105 & #9985535 • Chrysler Specs MS-9224 & MS-9417 • MTF-94 & Texaco MTX Fluids

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MTFQT	EA	1 Quart	12.30	15.75
MTFQT	CA	12 Quarts	140.50	179.55
MTF05	EA	(1) 5-gal. Pail	228.90	290.35

○ Super Shift[®] Synthetic Racing Transmission Fluid¹⁷

Formulated to prevent slippage and reduce heat in high-performance, high-horsepower vehicles.

Use in transmissions that require Allison C-4 • Ford Type F

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ARTQT	EA	1 Quart	11.15	14.10
ARTQT	CA	12 Quarts	126.95	160.65

○ Torque-Drive[®] Synthetic Heavy-Duty ATF¹⁷

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Use in transmissions that require Allison C-4, TES-295, TES-389; Ford MERCON® V; GM DEXRON® III; Isuzu SCS; MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F; MB 236.91, 236.10; Voith 55.6335, 55.6336; Volvo 97340, 97341; ZF TE-ML 03D, TE-ML 04D, TE-ML 14A, TE-ML 14B, TE-ML 14C, TE-ML 17C, TE-ML 20B, TE-ML 20C

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATD1G	EA	1 Gallon	45.45	59.45
ATD1G	CA	4 Gallons	173.05	226.40
ATDTP	EA	(1) 2.5 Gallon	112.50	-
ATDTP	CA	(2) 2.5 Gallons	214.20	-

○ Synthetic Tractor Hydraulic/Transmission Oil¹³

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.

Use in hydraulic systems that require SAE 5W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATHQT	EA	1 Quart	9.25	11.65
ATHQT	CA	12 Quarts	105.40	132.95
ATH05	EA	(1) 5-gal. Pail	170.40	213.30

^{15,17,13}See page 47 for Proposition 65 information for this product.

Synthetic Gear Lube



“Whoever invented the easy-pack concept is a genius. Especially for servicing transfer cases and differentials. It lives up to its name. Not only an innovative oil, but innovative packaging as well.”

– **Joey**
Calif.



SEVERE GEAR® Synthetic Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing. Flexible easy-pack helps you access tough-to-reach fill holes and eliminates the need for a pump. **Delivers 20% more cold-temperature protection than required by ASTM D2983.**

● 75W-90

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVGQT	EA	1 Quart	13.90	17.55
SVGQT	CA	12 Quarts	158.65	200.35
SVGPK	EA	(1) Quart Easy-Pack	13.90	17.55
SVGPK	CA	(12) Quart Easy-Packs	158.65	200.35
SVG05	EA	(1) 5-gal. Pail	249.90	326.75

○ 80W-90¹³

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AGLQT	EA	1 Quart	10.05	12.65
AGLQT	CA	12 Quarts	114.35	144.30
AGLPK	EA	1 Quart Easy-Pack	11.65	14.70
AGLPK	CA	12 Quart Easy-Packs	132.75	167.60
AGL05	EA	(1) 5-gal. Pail	176.15	230.35

● 75W-110

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVTQT	EA	1 Quart	14.35	18.20
SVTQT	CA	12 Quarts	163.80	207.90
SVTPK	EA	1 Quart Easy-Pack	16.05	20.40
SVTPK	CA	12 Quart Easy-Packs	183.30	233.10
SVT05	EA	(1) 5-gal. Pail	258.60	338.00

● 75W-140

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVOQT	EA	1 Quart	15.55	20.15
SVOQT	CA	12 Quarts	177.70	229.95
SVOPK	EA	(1) Quart Easy-Pack	15.55	20.15
SVOPK	CA	(12) Quart Easy-Packs	177.70	229.95
SVO05	EA	(1) 5-gal. Pail	281.70	368.25



Easy Installation

PRODUCT	STOCK#	U.S. P.C.	CAN. P.C.
Hand Pump	G2039	10.45	13.90
Flexible Pour Spout	G1230	0.70	0.95
Nozzle Dispenser Caps (6)	G1242	1.15	1.55

● Slip Lock® Differential Additive²¹

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

Note: AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADATB	EA	(1) 4-oz. Tube	7.30	9.60
ADATB	CA	(12) 4-oz. Tubes	83.30	109.65

SEVERE GEAR® EP Synthetic Racing Gear Lube

Engineered specifically for the demands of severe racing conditions, including off-road truck racing, rock racing, rock crawling, tractor pulling, funny car racing and dragster racing applications.

● SAE 250¹⁷

Use in differentials that require API GL-5/MT-1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SRTQT	EA	1 Quart	14.65	18.70
SRTQT	CA	12 Quarts	167.15	213.60
SRT05	EA	(1) 5-gal. Pail	273.30	348.20

Long Life Synthetic Gear Lube

Specifically engineered for extended drain intervals up to 500,000 miles (804,672 km) as set by equipment manufacturers for over-the-road trucks and heavy equipment.

● 75W-90¹³

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • Dana SHAES 256 (Eaton PS-163)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FGRQT	EA	1 Quart	12.10	14.75
FGRQT	CA	12 Quarts	137.85	168.25
FGR1G	EA	1 Gallon	47.70	-
FGR1G	CA	4 Gallons	181.65	-
FGR05	EA	(1) 5-gal. Pail	224.45	271.65

80W-140¹³

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • Dana SHAES 256 (Eaton PS-163)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FG005	EA	(1) 5-gal. Pail	214.20	271.70

^{13,21,17} See page 47 for Proposition 65 information for this product.

Fuel Additives



Gasoline Stabilizer¹³

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASTCN	EA	(1) 16-oz. Bottle	10.00	13.10
ASTCN	CA	(6) 16-oz. Bottles	57.05	74.70

Upper Cylinder Lubricant¹³

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
UCLCN	EA	(1) 6-oz. Bottle	3.65	4.85
UCLCN	CA	(12) 6-oz. Bottles	41.60	55.25

P.I. Performance Improver¹³

Concentrated detergent aggressively cleans stubborn, power-robbing deposits from injectors, valves and the combustion chamber in passenger cars and light trucks. Bottle compatible with capless fuel systems.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
APICN	EA	(1) 12-oz. Bottle	10.65	13.50
APICN	CA	(12) 12-oz. Bottles	121.25	153.75

AMSOIL Fights Corrosion

AMSOIL provides corrosion protection Sea Foam[®] Motor Treatment can't match, helping maintain power and performance and keeping metal looking like new even when subjected to salt water.*



Sea Foam



AMSOIL

*Based upon independent testing of AMSOIL Gasoline Stabilizer obtained Nov. 8, 2018 and Sea Foam Motor Treatment purchased Oct. 25, 2018 in a modified NACE TM0172 using synthetic sea water per ASTM D665 part B.

¹³See page 47 for Proposition 65 information for this product.



Quickshot®

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AQSCN	EA	(1) 8-oz. Bottle	7.85	10.30
AQSCN	CA	(6) 8-oz. Bottles	44.75	58.60

DOMINATOR® Octane Boost²¹

Improves the performance of all two- and four-stroke gasoline-fueled engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AOBBE	EA	(1) 12-oz. Bottle	8.55	11.00
AOBBE	CA	(6) 12-oz. Bottles	48.70	62.70

Diesel Recovery²¹

Emergency diesel fuel treatment that liquefies gelled diesel fuel and thaws frozen fuel filters. Keep a bottle on hand for emergencies.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DRCQT	EA	(1) 30-oz. Bottle	11.50	15.00
DRCQT	CA	(12) 30-oz. Bottles	131.05	171.40

Diesel All-In-One²⁵

Combines the superior deposit-removing properties of Diesel Injector Clean, the excellent anti-gelling properties of Diesel Cold Flow and the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. Protects against injector wear better than Sea Foam*, delivering 2X more diesel fuel lubricity^y

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADBPCN	EA	(1) 8-oz. Bottle	4.80	--
ADBPCN	CA	(6) 8-oz. Bottles	27.15	--
ADBCN	EA	(1) 16-oz. Bottle	8.55	11.40
ADBCN	CA	(12) 16-oz. Bottles	97.35	129.80
ADBHG	EA	(1) 64-oz. Bottle	29.50	--
ADBHG	CA	(6) 64-oz. Bottles	168.40	--
ADB05	EA	(1) 5-gal. Pail	254.40	338.05

Superior Cold-Temperature Protection

AMSOIL Diesel All-In-One provides as much as **32°F (18°C) better protection** against cold-temperature gelling than Howes* Lubricator Diesel Treat.^M Plus raises cetane up to 4 points.

^MBased on independent testing in July 2017 of AMSOIL Diesel All-In-One and Howes Lubricator Diesel Treat using diesel fuel representative of the U.S. marketplace and Howes' recommended treat ratio for above 0°F (-17.8°C).

^yBased upon independent testing of AMSOIL All-In-One obtained Nov. 8, 2018 and Sea Foam Motor Treatment purchased on Oct. 25, 2018 in the ASTM D6079 test.



Diesel Cold Flow¹⁷

Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point and improve cold-flow filtration properties. Lowers cold filter-plugging point (CFPP) by up to 40°F (22°C) in ultra-low-sulfur diesel (ULSD).

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ADDCN	EA	(1) 16-oz. Bottle	7.15
ADDCN	CA	(12) 16-oz. Bottles	81.20
ADD05	EA	(1) 5-gal. Pail	200.55

Diesel Cetane Boost

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. Diesel engines operate best on fuel with cetane values of 50 or higher. Most diesel fuel sold in North America has a cetane value of 40-45.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ACBCN	EA	(1) 16-oz. Bottle	7.30	9.75
ACBCN	CA	(12) 16-oz. Bottles	83.10	110.90
ACBHG	EA	(1) 64-oz. Bottle	23.60	--
ACBHG	CA	(6) 64-oz. Bottles	134.70	--
ACB05	EA	(1) 5-gal. Pail	201.70	268.40

Diesel Injector Clean¹⁹

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADFPNC	EA	(1) 8-oz. Bottle	3.75	--
ADFPNC	CA	(6) 8-oz. Bottles	21.35	--
ADFCN	EA	(1) 16-oz. Bottle	6.65	8.85
ADFCN	CA	(12) 16-oz. Bottles	75.45	100.80
ADFHG	EA	(1) 64-oz. Bottle	21.85	--
ADFHG	CA	(6) 64-oz. Bottles	124.60	--
ADF05	EA	(1) 5-gal. Pail	181.40	241.40

Diesel Injector Clean + Cetane Boost²¹

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADSPCN	EA	(1) 8-oz. Bottle	4.10	--
ADSPCN	CA	(6) 8-oz. Bottles	23.20	--
ADSCN	EA	(1) 16-oz. Bottle	10.45	13.85
ADSCN	CA	(12) 16-oz. Bottles	119.40	158.15
ADSHG	EA	(1) 64-oz. Bottle	34.30	--
ADSHG	CA	(6) 64-oz. Bottles	195.85	--
ADS05	EA	(1) 5-gal. Pail	298.50	395.55

²¹25,17,19 See page 47 for Proposition 65 information for this product.

Extended Filter Life

- AMSOIL Oil Filters designated with product code EA15K are recommended for 15,000 miles (24,100 km) or one year, whichever comes first, in normal or severe service. NOTE: Change oil filter at every oil change.
- AMSOIL Oil Filters designated with product code EAO are recommended for 25,000 miles (40,200 km) or one year, whichever comes first, in normal service or 15,000 miles (24,100 km) or one year, whichever comes first, in severe service. NOTE: Change oil filter at every oil change.
- When AMSOIL Oil Filters are used with a motor oil other than AMSOIL motor oil, the filter should be changed according to the vehicle manufacturer's recommendation.

Oil Filters

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear. Easy-grip coating eases the job of tightening and loosening filters. Call 1-800-777-7094 (Monday-Friday, 7 a.m.- 7 p.m. Central Time) or look up your vehicle at AMSOIL.com to determine the appropriate filter for each application.



Oil Filters

STOCK#	UNITS	U.S. P.C.	CAN. P.C.	STOCK#	UNITS	U.S. P.C.	CAN. P.C.
EA15K01	EA	16.80	22.25	EA15K32	EA	14.60	19.45
EA15K02	EA	17.10	22.60	EA034	EA	15.40	20.45
EA15K03	EA	15.65	20.70	EA15K35	EA	14.70	19.60
EA15K04	EA	16.30	21.55	EA15K37	EA	12.60	16.80
EA15K05	EA	15.75	20.90	EA15K38	EA	11.55	15.35
EA15K06	EA	13.65	18.15	EA15K39	EA	19.95	26.45
EA15K07	EA	11.55	15.35	EA042	EA	15.00	19.80
EA15K08	EA	17.35	22.90	EA15K43	EA	16.80	22.25
EA15K09	EA	15.60	20.70	EA15K49	EA	20.50	27.20
EA011	EA	14.35	19.05	EA15K50	EA	13.60	18.10
EA15K12	EA	14.05	18.65	EA15K51	EA	14.05	18.60
EA15K13	EA	14.80	19.60	EA052	EA	15.60	20.65
EA015	EA	15.50	20.60	EA15K53	EA	13.15	17.40
EA15K16	EA	14.70	19.60	EA15K54	EA	18.90	25.00
EA017	EA	14.20	18.75	EA055	EA	21.00	27.90
EA15K19	EA	14.70	19.60	EA059	EA	15.15	20.15
EA15K20	EA	15.40	20.35	EA064	EA	14.35	19.10
EA023	EA	14.35	19.05	EA080	EA	16.65	22.05
EA024	EA	15.65	20.70	EA15K88	EA	31.30	41.40
EA026	EA	17.00	22.50	EA098	EA	25.00	33.10
EA15K28	EA	14.70	19.60	EA099	EA	26.20	34.65
EA15K29	EA	14.90	19.75				

EAHD



Heavy-Duty Extended-Life Oil Filters

Provide excellent 99 percent filtering efficiency at 20 microns and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic engine oils.

See AMSOIL.com or call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

EABP



Bypass Filters

High-efficiency bypass filters effectively remove minute dirt particles and soot by working in conjunction with the engine's full-flow filter and capturing contaminants that full-flow filter can't remove.

See AMSOIL.com or call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

Grease



DOMINATOR® Synthetic Racing Grease

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track. Designed for bearings that operate under high-speed, high-heat conditions.

Use in applications that require NLGI No. 2, GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GRGCR	EA	(1) 14-oz. Cartridge	11.55	14.45
GRGCR	CA	(10) 14-oz. Cartridges	112.55	140.70

Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

● Synthetic Polymeric Off-Road Grease¹⁶

Use in applications that require NLGI No. 1, 5% Moly

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPOR1CR	EA	(1) 15-oz. Cartridge	7.85	10.05
GPOR1CR	CA	(10) 15-oz. Cartridges	77.35	99.25

● Synthetic Polymeric Off-Road Grease

Use in applications that require NLGI No. 2, 5% Moly

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPOR2CR	EA	(1) 15-oz. Cartridge	8.15	10.50
GPOR2CR	CA	(10) 15-oz. Cartridges	80.40	102.90

Synthetic Polymeric Truck, Chassis/Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

● Synthetic Polymeric Truck, Chassis/Equipment Grease²⁰

Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPTR1CR	EA	(1) 14-oz. Cartridge	6.55	8.65
GPTR1CR	CA	(10) 14-oz. Cartridges	64.45	85.05

● Synthetic Polymeric Truck, Chassis/Equipment Grease

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPTR2CR	EA	(1) 14-oz. Cartridge	7.15	9.35
GPTR2CR	CA	(10) 14-oz. Cartridges	70.15	91.90

^{16,20}See page 47 for Proposition 65 information for this product.

Arctic Synthetic Grease

Provides extreme low-temperature pumpability and superior protection for equipment operating in harsh climates where temperatures drop well below freezing.

Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GECCR	EA	(1) 15-oz. Cartridge	11.30	14.90
GECCR	CA	(10) 15-oz. Cartridges	109.90	144.90

Synthetic Multi-Purpose Grease

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

Use in applications that require NLGI No. 2 • GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GLCCR	EA	(1) 14-oz. Cartridge	6.90	9.05
GLCCR	CA	(10) 14-oz. Cartridges	66.05	86.65
GLC3P	EA	(3) 3-oz. Cartridges	8.50	11.20
GLC3P	CA	(30) 3-oz. Cartridges	81.15	106.60
GLCGN	EA	Grease Gun Kit	30.50	40.30

Synthetic Water-Resistant Grease

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

Use in applications that require NLGI No. 2 • GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GWR3P	EA	(1) 14-oz. Cartridge	7.10	9.30
GWR3P	CA	(10) 14-oz. Cartridges	68.15	89.25
GWR3P	EA	(3) 3-oz. Cartridges	9.10	11.95
GWR3P	CA	(30) 3-oz. Cartridges	86.65	113.95

Synthetic Fifth-Wheel Grease

Heavy-duty grease that provides outstanding protection and performance in the heavily loaded, harsh operating environments of fifth-wheel hitches used in trucking and trailer applications.

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FWGTB	EA	(1) 10-oz. Tube	7.60	10.05
FWGTB	CA	(12) 10-oz. Tubes	86.10	115.30

Spray Grease

Applies quickly and evenly and is ideal for greasing hard-to-reach equipment, including hinges, springs, industrial chains, latches, slides, winches and other common applications.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
GSPSC	EA	(1) 10-oz. Spray Can	7.30
GSPSC	CA	(12) 10-oz. Spray Cans	82.95

Synthetic ATV/UTV Oil



Formulated to deliver premium protection and performance for hard-working and performance ATVs and UTVs.



Synthetic ATV/UTV Motor Oil

Formulated to provide upgraded performance and protection for hard-working and performance ATVs and UTVs.

● 10W-40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV40QT	EA	1 Quart	9.80	12.80
AUV40QT	CA	12 Quarts	111.55	146.20

● 5W-50

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV50QT	EA	1 Quart	10.05	12.75
AUV50QT	CA	12 Quarts	114.70	145.55



● Synthetic ATV/UTV Transmission & Differential Fluid

Use in ATV and UTV transmissions and differentials, including those made by Polaris*, Honda*, Yamaha*, Kawasaki*, Can Am* and Suzuki*.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUDTQT	EA	1 Quart	11.25	14.40
AUDTQT	CA	12 Quarts	128.40	164.45
AUDTPK	EA	1 Quart Easy-Pack	12.95	16.60
AUDTPK	CA	12 Quart Easy-Packs	147.70	189.65

● Synthetic ATV/UTV Powertrain Fluid¹³

Purpose-built for transmission/differentials and front drives in Polaris* ATVs and UTVs, offering the perfect combination of protection and convenience.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUPTPK	EA	1 Quart Easy-Pack	11.80	15.45
AUPTPK	CA	12 Quart Easy-Packs	134.80	176.28



Polaris* ATV/UTV Oil Change Kits

FITMENT INFO:

PK1: ACE* 900, GENERAL* 1000, 2013+ RANGER* 900 & 1000, 2013+ RZR* 900 & 1000
PK2: ATP* 330, 500, Hawkeye* 300, 400, Magnum* 325, 330, 500, RANGER* 400, Model years 2016 and previous - RANGER* 500, Scrambler* 500, 850, 1000, Sportsman* 300, 400, 450, 500, 550, 570, 850, 1000, Trail Blazer* 330, Trail Boss* 325, 330, Xplorer* 500
PK3: ACE* 500, 570, 2017 + RANGER* 500, RANGER* 570, 700, 800, RZR* 570, 800, Sportsman* 600, 700, 800

Contains everything needed to perform an oil change on most Polaris UTVs and ATVs using AMSOIL Synthetic 5W-50 ATV/UTV Motor Oil. See AMSOIL.com or call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PK1	EA	1 kit	31.50	41.85
PK2	EA	1 kit	27.50	36.55
PK3	EA	1 kit	25.95	34.50



Can-Am* ATV/UTV Oil Change Kits

FITMENT INFO:

CK1: Maverick X3
CK2: Outlander 500-1000 • Renegade 500-1000 • Commander 800-1000 • Defender HD8 & HD10 • Maverick 800-1000 • Traxter HD8 & HD10
CK3: Defender HD5 • Outlander 400-450 • Traxter HD5

Contains everything needed to perform an oil change on most Can-Am UTVs and ATVs using AMSOIL Formula 4-Stroke® Powersports Synthetic Motor Oil. See AMSOIL.com or call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
CK1	EA	1 kit	52.10	69.25
CK2	EA	1 kit	40.40	53.85
CK3	EA	1 kit	50.55	67.25

See p. 41 for Synthetic Chaincase & Gear Oil.

¹³ See page 47 for Proposition 65 information for this product.

Synthetic Motorcycle Oil




AMSOIL Resists Viscosity Breakdown

AMSOIL resists viscosity breakdown **6X better** than Harley-Davidson* SYN3[®] for **improved protection** against compensator and transmission gear wear.^{BB}

Viscosity Breakdown

% viscosity loss in the CEC L45-KRL, ASTM D445, test

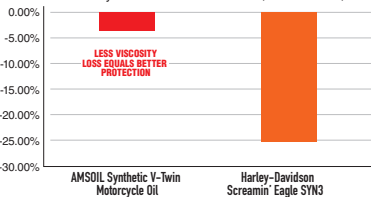

^{BB}Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



Synthetic V-Twin Motorcycle Oil

● 20W-50

Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson*, Buell* and other motorcycle engines, primaries and transmissions.

Use in bikes that require API SG, SL/CF, CG-4 • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCVQT	EA	1 Quart	10.25	13.40
MCVQT	CA	12 Quarts	116.90	153.10
MCV1G	EA	1 Gallon	40.25	52.65
MCV1G	CA	4 Gallons	153.30	200.55

● SAE 60

Superior synthetic formulation provides long service life and maximum protection against engine wear in big-bore, air-cooled motorcycle engines, including Harley-Davidson Panhead, Shovelhead and Knucklehead.

Use in bikes that require API SG, SL/CF, GL-1 • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCSQT	EA	1 Quart	11.15	14.15
MCSQT	CA	12 Quarts	126.95	161.30

● 20W-40

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian* and Victory* motorcycles.

Use in bikes that require API SM • JASO MA • ILSAC GF-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVIQT	EA	1 Quart	10.15	13.30
MVIQT	CA	12 Quarts	115.95	151.85

● 15W-60

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian and Victory motorcycles.

Use in bikes that require API SM • JASO MA • ILSAC GF-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MSVQT	EA	1 Quart	11.40	14.90
MSVQT	CA	12 Quarts	129.95	170.10

● Synthetic V-Twin Transmission Fluid

Helps quiet V-twin transmission noise and enable smooth shifts.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVTQT	EA	1 Quart	11.50	14.80
MVTQT	CA	12 Quarts	131.05	168.85

● Synthetic V-Twin Primary Fluid

Delivers consistent clutch feel and helps riders easily find neutral.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVPQT	EA	1 Quart	10.20	13.10
MVPQT	CA	12 Quarts	116.10	149.35

Motorcycle Octane Boost²¹

Increases octane up to three numbers for maximum power and efficiency in motorcycles.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MOBCN	EA	(1) 4-oz. Bottle	4.25	5.60
MOBCN	CA	(12) 4-oz. Bottles	48.25	63.65

V-Twin Oil Change Kits

FITMENT INFO:

HDCK, HDBK: most 1999-2016 Harley-Davidson* motorcycles (HDCK includes chrome filter; HDBK includes black filter).

HDMC, HDMB: most 2017-present Harley-Davidson motorcycles (HDMC includes chrome filter; HDMB includes black filter).

Contains everything needed to perform an oil change on most Harley-Davidson motorcycles, including 20W-50 Synthetic V-Twin Motorcycle Oil, AMSOIL Motorcycle Oil Filter and O-ring.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HDCK	EA	1 kit	56.30	74.40
HDBK	EA	1 kit	53.50	71.10
HDMC	EA	1 kit	66.55	88.30
HDMB	EA	1 kit	63.75	84.60

Synthetic Metric Motorcycle Oil

● 10W-40

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am*, Honda*, Yamaha*, Kawasaki*, Triumph*, Suzuki*, BMW* and other motorcycle engines.

Use in bikes that require API SM, SG, SL, CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCFQT	EA	1 Quart	10.25	13.35
MCFQT	CA	12 Quarts	116.90	152.50
MCF1G	EA	1 Gallon	40.25	52.10
MCF1G	CA	4 Gallons	153.30	198.45

● 10W-30

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda, Yamaha, Suzuki and Kawasaki motorcycles.

Use in bikes that require API SH, SG, CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCTQT	EA	1 Quart	9.85	12.95
MCTQT	CA	12 Quarts	112.35	147.45

● 15W-50

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Ducati*, BMW, KTM*, Yamaha, Triumph and Royal Enfield* motorcycles.

Use in bikes that require API SM • JASO MA/MA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MFFQT	EA	1 Quart	11.10	14.80
MFFQT	CA	12 Quarts	126.75	168.85

Motorcycle Oil Filters

Most efficient filters available for the motorcycle and powersports market. Provide excellent 99 percent filtering efficiency at 20 microns. Available in black or chrome (as available).

See AMSOIL.com or call (715) 399-TECH (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

²¹See page 47 for Proposition 65 information for this product.

Synthetic Dirt Bike Oil



DB40



DB50



DB60



DBTF



PSAF

“Love AMSOIL products. Something I can count on always working even when racing is unpredictable.”

– CAJO
Alpine, Utah

Synthetic Dirt Bike Oil

Delivers confidence in clutch feel, maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.

10W-40

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB40QT	EA	1 Quart	10.10	13.20
DB40QT	CA	12 Quarts	115.00	150.60

10W-50

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB50QT	EA	1 Quart	10.85	14.25
DB50QT	CA	12 Quarts	124.00	162.55

10W-60

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB60QT	EA	1 Quart	11.15	14.60
DB60QT	CA	12 Quarts	127.30	166.35

Synthetic Dirt Bike Transmission Fluid

Use in two-stroke dirt bike transmissions and the Honda CRF

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DBTFQT	EA	1 Quart	8.70	11.50
DBTFQT	CA	12 Quarts	98.95	131.05


Powersports Antifreeze & Coolant

Advanced design helps control operating temperature in hot-running, high-revving powersports applications. Extended-life formula provides all-season protection for up to five years.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PSAFQT	EA	1 Quart	7.49	10.09
PSAFQT	CA	12 Quarts	85.05	114.70

AMSOIL delivers confident clutch feel.

AMSOIL provides excellent clutch protection. How good is it? In extreme simulated-start testing, AMSOIL provided superior wear protection and kept clutch plates looking new.

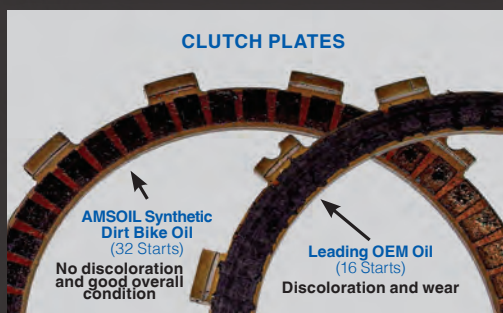

*Based on dyno testing of a Honda CRF450 dirt bike using AMSOIL 10W-40 Synthetic Dirt Bike Oil and a leading original equipment manufacturer 10W-40 conventional dirt bike oil.

Synthetic 4-Stroke Oil



AFF



AES



ASE



ASF



AHF



ASO



ABC

Commercial-Grade Synthetic Oil for Small Engines

AMSOIL Synthetic Small-Engine Oil provides excellent all-season protection and performance in a large variety of small engines:

- Zero-Turn Mowers
- Riding and Push Lawnmowers
- Snowblowers
- Generators
- Pumps
- Welders
- Skid-Steers
- Compressors
- And More

● Formula 4-Stroke® Power Sports Synthetic Motor Oil

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.

Use in ATVs and snowmobiles that require API SG, SJ, SL/CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFFQT	EA	1 Quart	10.35	13.55
AFFQT	CA	12 Quarts	118.00	154.35

Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

Use in equipment that requires API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2

○ 5W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AESQT	EA	1 Quart	7.35	9.65
AESQT	CA	12 Quarts	83.95	110.25

● 10W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASEQT	EA	1 Quart	7.35	9.65
ASEQT	CA	12 Quarts	83.95	110.25
ASE1G	EA	1 Gallon	28.75	—
ASE1G	CA	4 Gallons	109.45	—

● 10W-40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASFQT	EA	1 Quart	7.50	10.20
ASFQT	CA	12 Quarts	85.55	116.55
ASF1G	EA	1 Gallon	29.30	—
ASF1G	CA	4 Gallons	111.55	—

● 20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid¹³

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

Use in hydrostatic transmissions that require 15W-50 or 20W-50 oil recommended for API SM, SL, SJ, SH or SG.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AHFQT	EA	1 Quart	9.45	12.75
AHFQT	CA	12 Quarts	107.45	145.55
AHF1G	EA	1 Gallon	36.95	—
AHF1G	CA	4 Gallons	140.70	—

● Formula 4-Stroke® Synthetic Scooter Oil¹³

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters.

Use in scooters that require API SG, SL/CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ASOQT	EA	1 Quart	8.10
ASOQT	CA	12 Quarts	92.30

● Semi-Synthetic Bar and Chain Oil¹⁷

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ABCQT	EA	1 Quart	4.80	6.30
ABCQT	CA	12 Quarts	54.85	71.85
ABC1G	EA	1 Gallon	18.65	—
ABC1G	CA	4 Gallons	71.00	—
ABC05	EA	(1) 5-gal. Pail	86.10	112.60

^{13,17}See page 47 for Proposition 65 information for this product.

Synthetic 2-Stroke Oil



SABER Professional Fights Carbon

Equipment using SABER Professional was 96% carbon-free^N.



Leading OEM oil after 300 hours



AMSOIL SABER Professional after 300 hours

^NBased on spark-arrestor testing.




Runs On Freedom™ Limited Snowmobile Warranty

Use AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil exclusively in your current-model-year or newer sled and we'll cover engine repairs in the unlikely event of any engine breakdown for up to two years/5,000 miles/8,000 km.*

*To get details and register, visit AMSOIL.com/rofwarranty.



POWERFUL PROTECTION WITH A LIMITED WARRANTY TO

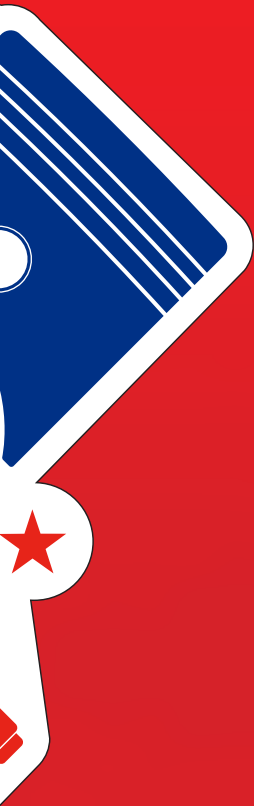

CTION
MATCH

AIO



● Synthetic 2-Stroke Injector Oil¹³

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors. Ideal for vintage sleds.

Use in snowmobiles and boat motors that require TC-W3 • API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AIOQT	EA	1 Quart	7.05	9.30
AIOQT	CA	12 Quarts	80.50	105.85
AIO1G	EA	1 Gallon	27.75	35.85
AIO1G	CA	4 Gallons	105.65	136.50

AIT



● INTERCEPTOR® Synthetic 2-Stroke Oil¹³

Purpose-built, best-in-class performance for piston protection, cold-temperature pumpability and exhaust power valve cleanliness. Use in snowmobiles, including those made by Ski-Doo*, Polaris* and Arctic Cat*.

Use in snowmobiles that require API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AITQT	EA	1 Quart	9.30	12.10
AITQT	CA	12 Quarts	105.85	138.00
AIT1G	EA	1 Gallon	36.40	46.95
AIT1G	CA	4 Gallons	138.60	178.75

Check out the
Runs on Freedom
Limited Snowmobile
Warranty on page 9.

TDR



● DOMINATOR® Synthetic 2-Stroke Racing Oil¹³

Delivers outstanding wear protection in high-horsepower and modified racing applications, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.

Use in snowmobiles that require API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
TDRQT	EA	1 Quart	9.75	12.65
TDRQT	CA	12 Quarts	111.05	144.30
TDR1G	EA	1 Gallon	38.25	49.20
TDR1G	CA	4 Gallons	145.55	187.35

ATP



● SABER® Professional Synthetic 2-Stroke Oil¹³

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience.

Use in power equipment that requires ISO-L-EGD • API TC • JASO FD

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATPPK	EA	(1) 1.5-oz. Pillow Pack	1.20	-
ATPPK	CA	(48) 1.5-oz. Pillow Packs	53.25	-
ATPTS	EA	(1) 2.6-oz. Bottle	2.00	-
ATPTS	CA	(12) 2.6-oz. Bottles	22.35	-
ATPBA	EA	(1) 3.5-oz. Bottle	2.10	-
ATPBA	CA	(12) 3.5-oz. Bottles	24.00	-
ATPSF	EA	(1) 6.4-oz. Bottle	3.30	4.45
ATPSF	CA	(12) 6.4-oz. Bottles	37.35	50.40
ATPBC	EA	(1) 8-oz. Bottle	4.00	4.95
ATPBC	CA	(12) 8-oz. Bottles	45.55	56.10
ATPTE	EA	(1) 12.8-oz. Bottle	6.20	-
ATPTE	CA	(12) 12.8-oz. Bottles	70.80	-
ATPQT	EA	1 Quart	10.10	12.75
ATPQT	CA	12 Quarts	115.30	145.55
ATP1G	EA	1 Gallon	39.70	-
ATP1G	CA	4 Gallons	151.20	-

TCC



○ Synthetic Chaincase & Gear Oil

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
TCCCN	EA	(1) 16-oz. Bottle	8.75	11.40
TCCCN	CA	(6) 16-oz. Bottles	49.95	64.90
TCC05	EA	(1) 5-gal. Pail	201.50	257.80

¹³See page 47 for Proposition 65 information for this product.

Synthetic Marine Oil



“Switched my marine big block over to AMSOIL 25W-40 and have seen better oil pressure and increased performance over 30W oil. I’ll definitely use this oil again.”

— **Runky**
Portsmouth, RI



WCT



Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications.

● 10W-30

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-00833T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCTQT	EA	1 Quart	8.80	11.50
WCTQT	CA	12 Quarts	100.05	131.05

WCF



WCM



● 10W-40

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-00850T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCFQT	EA	1 Quart	9.50	12.45
WCFQT	CA	12 Quarts	108.05	141.75

● 25W-40 (Synthetic Blend)²³

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-11825T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCMQT	EA	1 Quart	7.25	9.65
WCMQT	CA	12 Quarts	82.55	110.25

HPM



ATO



● HP Marine™ Synthetic 2-Stroke Oil¹³

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

Use in boat motors that require TC-W3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HPMQT	EA	1 Quart	8.30	10.75
HPMQT	CA	12 Quarts	94.50	122.85
HPM1G	EA	1 Gallon	32.45	41.70
HPM1G	CA	4 Gallons	123.50	158.80

● Outboard 100:1 Pre-Mix Synthetic 2-Stroke Oil¹³

Contains a heavy dose of low-temperature dispersant additives that excel at reducing varnish and carbon deposit formation in water-cooled outboard motors.

Use in boat motors that require TC-W3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ATOBC	EA	(1) 8-oz. Bottle	4.20
ATOBC	CA	(12) 8-oz. Bottles	47.75
ATOQT	EA	1 Quart	11.35
ATOQT	CA	12 Quarts	129.35

AGM



● Universal Synthetic Marine Gear Lube

Resists foam and retains extreme-pressure qualities in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions. Delivers advanced outboard protection against power loss and gear wear, even with up to 15 percent water contamination.^Y Choose the easy-pack for fast, easy installation.

Use in applications that require GL-5, GL-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AGMTB	EA	(1) 10-oz. Tube	6.25	8.05
AGMTB	CA	(6) 10-oz. Tubes	35.65	46.00
AGMQT	EA	1 Quart	10.10	13.20
AGMQT	CA	12 Quarts	115.15	150.60
AGMPK	EA	1 Quart Easy-Pack	11.80	15.40
AGMPK	CA	12 Quart Easy-Packs	134.30	175.80
AGM05	EA	(1) 5-gal. Pail	186.65	244.10

Marine Gear Lube Pump²⁷

Specifically designed to ease installation and reduce mess when servicing lower units. Eliminate the need for a pump, save money and reduce the mess by choosing the easy-pack.

STOCK#	U.S. P.C.	CAN. P.C.
G3456	10.10	13.40

^{23,13,27} See page 47 for Proposition 65 information for this product.
^Y Based upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D892.

Cleaners and Protectants



Protection and Dependability
for Generations



Chain Lube

Provides outstanding protection against wear and corrosion. Helps extend chain life. Does not attract dirt and does not fling off. Fast-drying.

STOCK#	UNITS	PKG./SIZE	U.S.P.C.
ACL4SC	EA	(1) 4.5-oz. Spray Can	5.25
ACL4SC	CA	(12) 4.5-oz. Spray Cans	59.85
ACLSC	EA	(1) 11-oz. Spray Can	8.85
ACLSC	CA	(6) 11-oz. Spray Cans	50.55

Engine Fogging Oil

Helps prevent corrosion and dry starts to internal engine components found in outboard motors, lawn and garden equipment, motorcycles, snowmobiles, ATVs, motor homes and generators during storage or long periods of inactivity.

STOCK#	UNITS	PKG./SIZE	U.S.P.C.
FOGSC	EA	(1) 12-oz. Aerosol Can	7.60
FOGSC	CA	(6) 12-oz. Aerosol Cans	43.30

Power Foam®

Improves starting and performance by cleaning dirty intake systems and spark plugs; freeing sticky valves and removing gum, varnish and carbon deposits.

STOCK#	UNITS	PKG./SIZE	U.S.P.C.
APFSC	EA	(1) 18-oz. Spray Can	8.35
APFSC	CA	(12) 18-oz. Spray Cans	94.45

Heavy-Duty Degreaser

Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete and other surfaces.

STOCK#	UNITS	PKG./SIZE	U.S.P.C.
ADGSC	EA	(1) 15-oz. Spray Can	11.05
ADGSC	CA	(12) 15-oz. Spray Cans	125.80

Silicone Spray²⁶

Perfect for lubricating or protecting rubber, nylon, plastics, upholstery, vinyl, wood, cardboard or fiberglass. Also excellent for waterproofing leather products. Hundreds of household uses.

STOCK#	UNITS	PKG./SIZE	U.S.P.C.
ALSSP	EA	(1) 10-oz. Spray Can	7.50
ALSSP	CA	(12) 10-oz. Spray Cans	85.70

²⁶See page 47 for Proposition 65 information for this product.



MudSlinger®

Provides a protective layer of armor against the accumulation of mud, dirt and snow on ATVs, UTVs and dirt bikes, easing clean-up. Restores color and luster.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMSSC	EA	(1) 12-oz. Spray Can	8.10
AMSSC	CA	(12) 12-oz. Spray Cans	92.40

Engine Degreaser

Effectively cleans engine surfaces by cutting through grease, oil and grime.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AEDSC	EA	(1) 15-oz. Spray Can	6.90
AEDSC	CA	(12) 15-oz. Spray Cans	78.75

Glass Cleaner

Cuts through grease and grime faster than other leading glass cleaners, stays where you spray it and leaves no streaks.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AGCSC	EA	(1) 19-oz. Spray Can	3.90
AGCSC	CA	(12) 19-oz. Spray Cans	44.05

Metal Protector

Displaces water, lubricates, penetrates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMP4SC	EA	(1) 4-oz. Spray Can	4.45	—
AMP4SC	CA	(12) 4-oz. Spray Cans	50.40	—
AMPSC	EA	(1) 8.75-oz. Spray Can	5.80	7.30
AMPSC	CA	(12) 8.75-oz. Spray Cans	66.15	83.20

Heavy-Duty Metal Protector

Penetrates and adheres to metal surfaces, leaving a long-lasting coating that protects against the damaging effects of salt, moisture or chemical corrosion.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMHSC	EA	(1) 15-oz. Spray Can	9.90
AMHSC	CA	(12) 15-oz. Spray Cans	113.00

Engine and Transmission Flush

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FLSHCN	EA	(1) 16-oz. Bottle	9.35	12.10
FLSHCN	CA	(12) 16-oz. Bottles	106.75	138.00
FLSH05	EA	(1) 5-gal. Pail	287.20	363.15

Miracle Wash® Waterless Wash & Wax

Unique dry car wash and polish delivers outstanding performance and quick, easy and economical spray application. No water required.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMWSC	EA	(1) 13-oz. Spray Can	8.35
AMWSC	CA	(12) 13-oz. Spray Cans	95.35

Synthetic Firearm Lubricant and Protectant

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FLPBA	EA	(1) 4-oz. Bottle	7.75	10.30
FLPBA	CA	(12) 4-oz. Bottles	88.20	117.20
FLPSC	EA	(1) 5-oz. Spray Can	9.65	—
FLPSC	CA	(12) 5-oz. Spray Cans	110.25	—

Firearm Cleaner and Protectant

Penetrates deep into hard-to-reach components, effectively cleaning fouling and powder residue from all firearm surfaces, safely protecting them for storage, reducing jamming and increasing reliability. Protects against corrosion, allowing for safe storage and preserving performance, reliability and value.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
FCPCN	EA	(1) 8-oz. Bottle	8.85
FCPCN	CA	(12) 8-oz. Bottles	100.80
FCPSC	EA	(1) 5-oz. Spray Can	5.55
FCPSC	CA	(12) 5-oz. Spray Cans	63.00



● Heavy-Duty Antifreeze & Coolant¹⁵

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,000,000 miles, 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.

Use in applications requiring any of the following specifications:
 ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A
 Suitable for use with the following: Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth R026-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ANTHD1G	EA	1 Gallon	16.45
ANTHD1G	CA	4 Gallons	62.60

○ Propylene Glycol Antifreeze & Coolant

Combines the benefits of biodegradability, low toxicity and all-climate protection for up to 150,000 miles (241,400 km) or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,000,000 miles (1,609,344 km), 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.

Use in applications requiring any of the following specifications:
 ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A
 Suitable for use with the following: Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth R026-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ANT1G	EA	1 Gallon	29.95	39.30
ANT1G	CA	4 Gallons	114.05	149.55

● Passenger Car/Light Truck Antifreeze & Coolant¹⁵

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ANTPC1G	EA	1 Gallon	15.20
ANTPC1G	CA	4 Gallons	57.75

Fluid Extraction Pump

STOCK#	U.S. P.C.	CAN. P.C.
G2576	15.75	20.95

Aids in the removal of old fluids when servicing vehicles.



¹⁵See page 47 for Proposition 65 information for this product.

DOMINATOR® Coolant Boost

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles.

Warm up your car 54% faster. See the Coolant Boost product page at AMSOIL.com for details.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RDCBCN	EA	(1) 16-oz. Bottle	9.95	13.30
RDCBCN	CA	(6) 16-oz. Bottles	56.65	75.95

Shock Therapy® Suspension Fluid

Controls friction, heat, wear, foaming and scuffing in suspension components.

● Shock Therapy Suspension Fluid¹⁷

Lightweight #5				
STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
STLQT	EA	1 Quart	12.00	15.30
STLQT	CA	12 Quarts	136.75	174.55
STL05	EA	(1) 5-gal. Pail	222.60	281.60

● Shock Therapy Suspension Fluid¹⁷

Medium #10				
STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
STMQT	EA	1 Quart	11.75	15.05
STMQT	CA	12 Quarts	134.00	172.00
STM05	EA	(1) 5-gal. Pail	218.05	277.10

○ Synthetic Air Tool Oil

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AIRBA	EA	(1) 4-oz. Bottle	3.55	4.70
AIRBA	CA	(12) 4-oz. Bottles	40.05	53.55

Multi-Vehicle Synthetic Power Steering Fluid¹³

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

Use in applications that require American Motor Corporation C 4124; 4634 • BMW 82 11 0 148 132; 83 29 0 429 576; 81 22 1 468 879 & 82 11 1 468 041 • Chrysler MS-1872; MS-5931, MS-9602 & MS-11655 • Ford M2C138-CJ; ESW-M2C128-C&D; M2C195-A; M2C204-A & M2C33-F • GM/Saginaw PSF 9985010; 9985835; 89021184 & 1050017 • Hyundai/Kia PSF-3; PSF-4 & PSF 00232-19017 • Mercedes Benz 236.3; 345.0; 001 989 24 03 10; 001 989 24 03 12 & Q 1 32 0001 • Mitsubishi Diamond SP III & PS Fluid • Navistar TMS 6810 • Nissan PSF-II • Porsche 000 043 206 56 • Saab 93160548; (45) 30 09 800 & 30 32 380 • Subaru K0209A0080 • Toyota PSF Type EH; P/N 008886-01 • Volvo 1161529 & 30741424 • VW/Audi TL-52146; G002000; G 004 000 M2; G 004 000 M7 & G 004 000 M8

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PSFCN	EA	(1) 16-oz. Bottle	6.95	8.85
PSFCN	CA	(12) 16-oz. Bottles	79.25	100.80



DOT 3 & 4 Synthetic Brake Fluid¹¹

High-performance brake fluid specially designed as a multi-use product for passenger-car, light-truck and powersports applications.

Use in equipment requiring a DOT 3, 4 or 5.1 brake fluid.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BFLVCN	EA	(1) 12-oz. Bottle	6.05
BFLVCN	CA	(12) 12-oz. Bottles	69.10

DOMINATOR® DOT 4 Synthetic Racing Brake Fluid¹⁰

High boiling point brake fluid engineered to resist brake fade and vapor lock during intense racing applications.

Use in racing equipment requiring a DOT 4 brake fluid.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BFRCN	EA	(1) 12-oz. Bottle	11.40
BFRCN	CA	(12) 12-oz. Bottles	129.80

Brake & Parts Cleaner

Professional-strength parts cleaner that quickly removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BPCSC	EA	(1) 19-oz. Spray Can	4.60
BPCSC	CA	(12) 19-oz. Spray Cans	52.15

Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

● Synthetic Compressor Oil

Use in compressors that require ISO 46 • SAE 20

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PCIQT	EA	1 Quart	11.00	13.80
PCIQT	CA	12 Quarts	125.40	157.50
PCI05	EA	(1) 5-gal. Pail	203.70	255.30

● Synthetic Compressor Oil

Use in compressors that require ISO 100 • SAE 30/40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PCKQT	EA	1 Quart	11.35	14.35
PCKQT	CA	12 Quarts	129.65	163.80
PCK05	EA	(1) 5-gal. Pail	210.80	265.00

^{11,10}See page 47 for Proposition 65 information for this product.

CALIFORNIA PROPOSITION 65 WARNING STATEMENTS

- 10** **⚠️ WARNING:** This product can expose you to 2,2'-Iminodiethanol, which is known to the State of California to cause cancer, and Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 11** **⚠️ WARNING:** This product can expose you to 2-Methoxyethanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 13** **⚠️ WARNING:** This product can expose you to Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 15** **⚠️ WARNING:** This product can expose you to Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 16** **⚠️ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer, and Dibutyl phthalate, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 17** **⚠️ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 19** **⚠️ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer, and Methanol which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 20** **⚠️ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer, and Dibutyl phthalate, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 21** **⚠️ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 23** **⚠️ WARNING:** This product can expose you to Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 25** **⚠️ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer, and Methanol which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 26** **⚠️ WARNING:** This product can expose you to n-Hexane, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 27** **⚠️ WARNING:** This product can expose you to Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



CHANGE SERVICE REQUESTED

Published 4 times annually

PRSR STD
US POSTAGE
PAID
AMSOIL

ISO 9001/ISO 14001 REGISTERED



WE HONOR



(Discover in U.S. only)

Spring will be here before you know it. Check out our new Can-Am* ATV/UTV Oil Change Kits and Powersports Antifreeze & Coolant before riding season starts. AMSOIL.com



AMSOIL INC., 925 Tower Ave., Superior, WI 54880 • 715-392-7101 • Printed in the USA
© 2021, AMSOIL INC. All rights reserved. The AMSOIL logo is a registered trademark of AMSOIL INC.

AMSOIL.com

Spring 2021



CLEANER. FASTER. EASIER.

The AMSOIL easy-pack helps you access tough-to-reach fill holes. The flexible packaging makes changing fluid cleaner and faster, and eliminates the need for a pump.

Stay ahead of the curve with this revolutionary solution to challenging installations.

