

AMSOIL[®]

► PREFERRED CUSTOMER EDITION

MAGAZINE

WINTER 2022



New Viscosities Deliver
Upgraded **Protection** for
More ATVs and UTVs | PAGE 4



STAFF

Editor

Terry Johnsen

Associate Editor

Joel Youngman

Staff Writers

David Hilgendorf

Brad Nelson

Jamie Trembath

Joel Youngman

Graphic Design Manager

Jeff Spry

Senior Graphic Designer

Luke Boynton

Content Contribution

Sarah Matheson

Dan Peterson

Alex Thompson

Lindsay Tousignant

Editorial Contribution

Mark Nyholm

Back Issues

Back issues of *AMSOIL Magazine* are available for \$1 each. Order G17PC and specify the month and year.

On the Web

AMSOIL.com

AMSOIL.ca

Chairman & CEO

Alan Amatzio

President

Bhadresh Sutaria

© 2022, AMSOIL INC.

All rights reserved.

Printed by Arrowhead Printing

Duluth, MN USA.

Testimonials

AMSOIL INC.

Communications Department

The AMSOIL Building

925 Tower Ave.

Superior, WI 54880

testimonials@AMSOIL.com



POWERFUL PROTECTION WITH A SLED WARRANTY TO MATCH

Don't let the snowmobile manufacturer dictate which oil you use. Choose the superior protection provided by AMSOIL INTERCEPTOR® for your new, current-model-year or newer sled and we'll back you with our Runs on Freedom Limited Snowmobile Warranty that covers engine repairs for up to two years/5,000 miles/8,000 km.*



***Get the details and sign up at
[AMSOIL.com/rof_warranty](https://www.amsoil.com/rof_warranty).**



TABLE OF CONTENTS - PRODUCTS

Gasoline Motor Oil	14
European Motor Oil	18
Classic/Collector Car Motor Oil	20
Racing Oil	22
Diesel Oil	24
Transmission Fluid	26
Gear Lube	28
Fuel Additives	30
Filters	32
Grease	33
ATV/UTV Oil	34
Motorcycle Oil	36
Dirt Bike Oil	38
4-Stroke Oil	39
2-Stroke Oil	40
Marine Oil	42
Cleaners and Protectants	44
Miscellaneous	46

PREFERRED CUSTOMER EDITION

WINTER 2022

FEATURES

- 4 New Viscosities Deliver Upgraded Protection for More ATVs and UTVs
- 6 AMSOIL Championship Snocross: 2022-2023 Preview
- 8 Jeep World
- 10 The Coolant Life
- 12 Winning. Period.

DEPARTMENTS

- 7 Tech Talk

ADVERTISEMENTS

- 2 Powerful Protection with a Sled Warranty to Match
- 48 Look Under the Hood of Preferred Customer Membership with Your MyRewards Page



THE COVER

New 10W-30 and 5W-40 viscosities expand the reach of the AMSOIL Synthetic ATV/UTV Motor Oil line.

*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

New Viscosities Deliver **Upgraded Protection** for More ATVs and UTVs

New AMSOIL 10W-30 Synthetic ATV/UTV Motor Oil and 5W-40 Synthetic ATV/UTV Motor Oil provide expanded protection for hard-working and performance ATVs and UTVs, including those made by Honda,* Can-Am* and Kawasaki.*

Protection in Tough Conditions

ATVs and UTVs are used to tackle any task or terrain, like pulling trailers, hauling gravel, herding livestock, plowing snow, powering through mud and more. This hard work and aggressive riding place a lot of stress on the engine. It's also common to modify UTVs and ATVs with accessories designed to increase power and productivity, like roof and door panels, a plow, a winch, skid plates and other accessories. These upgrades allow riders to do more, but they also add weight and increase the severity of operation. Added weight equals added heat, and heat causes standard-service lubricants to break down sooner.

AMSOIL Synthetic ATV/UTV Motor Oil is engineered to withstand these severe operating conditions by delivering reserve protection against heat. It provides reliable wear protection and aids in cooling shrouded engines, so you can feel confident that your machine is protected when tackling tough jobs around your property or riding aggressively on the trail.

All-Weather, All-Climate Performance

AMSOIL Synthetic ATV/UTV Motor Oil performs in both cold and hot temperature extremes. It remains fluid in sub-zero temperatures to provide excellent startup protection, and it resists thinning due to extreme heat and mechanical shear for superior protection in hot conditions.

Two New Viscosities

Like the rest of the AMSOIL Synthetic ATV/UTV Motor Oil lineup, the new 10W-30 and 5W-40 viscosities were developed specifically for demanding chores and terrain. Their advanced synthetic technology resists oxidation and protects against extreme heat to help prevent sludge and varnish. AMSOIL 5W-40 Synthetic ATV/UTV Motor Oil (AUV54) provides excellent cold-flow ability for quick starts in cold temperatures. AMSOIL 10W-30 Synthetic ATV/UTV Motor Oil (AUV30) provides exceptional protection during cold starts and high rpm. These severe-service formulations allow riders to confidently and safely push their ATVs and UTVs to the limit.

- **Outstanding protection** when used for racing, hauling, plowing or conquering tough terrain
- **Formulated** without friction modifiers to promote smooth shifting and positive clutch engagement
- **Fights** rust and corrosion
- **All-season** formula performs in extreme heat and cold
- **Wet-clutch** compatible

Premium Alternatives

Unlike OEMs who focus on making vehicles, we focus on one thing: developing premium lubricants and products that are purpose-built to protect the machines that use them. AMSOIL 10W-30 Synthetic ATV/UTV Motor Oil and AMSOIL 5W-40 Synthetic ATV/UTV Motor Oil have been developed to offer cost-effective, high-performance alternatives to Honda and Can-Am lubricants of the same viscosities. AMSOIL Synthetic ATV/UTV Motor Oil is Warranty Secure™ and will not void your ATV or UTV warranty.



AMSOIL 5W-40 Synthetic ATV/UTV Motor Oil

U.S. PRICING

Stock #	Units	Pkg./Size	P.C. Price
AUV54QT	-EA	1 Quart	12.29
AUV54QT	-CA	12 Quarts	139.15

CANADA PRICING

Stock #	Units	Pkg./Size	P.C. Price
AUV54QTC	-EA	(1) 946-ml. Bottle	16.19
AUV54QTC	-CA	(12) 946-ml. Bottles	184.20

AMSOIL 10W-30 Synthetic ATV/UTV Motor Oil

U.S. PRICING

Stock #	Units	Pkg./Size	P.C. Price
AUV30QT	-EA	1 Quart	11.19
AUV30QT	-CA	12 Quarts	126.45

Not available in Canada.



Applications

- Use AMSOIL 10W-30 Synthetic ATV/UTV Motor Oil (AUV30) in ATVs and UTVs that require a 10W-30 oil, including those made by Honda.*
- Use AMSOIL 5W-40 Synthetic ATV/UTV Motor Oil (AUV54) in ATVs and UTVs that require a 5W-40 oil, including those made by Can-Am* and Kawasaki.*

Check Out The Rest of the AMSOIL ATV/UTV Lineup Synthetic ATV/UTV Motor Oil (AUV40, AUV50)

- **Outstanding protection** when performing demanding chores and tackling tough terrain
- **Consistent** clutch feel
- **Superior** all-weather performance
- **Wet-clutch** compatible

Synthetic ATV/UTV Transmission & Differential Fluid (AUDT)

- **Outstanding protection** when performing demanding chores and tackling tough terrain
- **Protects** heavily loaded, high-torque gears
- **Superior** all-weather performance

Synthetic ATV/UTV Powertrain Fluid (AUPT)

- **Protects** heavily loaded, high-torque gears
- **Designed** to prevent clutch chatter
- **Flexible** easy-pack for clean, fast installation
- **High-performance** alternative to Polaris* Demand Drive Fluid* and Polaris AGL Synthetic Gearcase Lubricant and Transmission Fluid*

ATV/UTV Oil Change Kits (PK1, PK2, PK3, CK1, CK2, CK3)

- **Combine** everything needed to perform an AMSOIL oil change on the most popular Polaris or Can-Am ATV/UTV models in one convenient package.



**ATV/UTV Oil Change Kits featuring AMSOIL 10W-30 Synthetic ATV/UTV Motor Oil and 5W-40 Synthetic ATV/UTV Motor Oil will be introduced within the upcoming year.



2022-2023 Preview

The AMSOIL Championship Snocross 2022-2023 national tour kicks off Dec. 16 in Fargo, N.D. Here's a preview of what to look out for this racing season.

AMSOIL Championship Snocross is the premier snowmobile racing series, taking place over eight weekends at venues all around the midwest United States. Along with the AMSOIL Pro Class, competitors will line up in the Pro Lite, Pro Women and Pro Snowbike classes for 16 rounds of high-speed snowmobile action in the 2022-2023 season.

The first stop will be at Red River Valley Fairgrounds in West Fargo, N.D. Elias Ishoel will once again be defending the AMSOIL Pro Class title after winning the championship last season. One of Ishoel's highly anticipated rivals will be Team AMSOIL rider Hunter Patenaude. He and Ishoel battled closely on the slopes during the 2021-2022 AMSOIL Championship Snocross Series before Patenaude ultimately finished second in the Pro Class.

This season also features several newly formed teams on the circuit that bring some fresh competition to the tracks.

Team AMSOIL

Logan Christian will be joining Hunter Patenaude in the Scheuring Speed Sports trailer in the Pro Class division.

Follow Along

Fans who can't get to the tracks this season can tune in to all rounds of AMSOIL Championship Snocross airing live with replays on the FloSports/ FloRacing network. CBS Sports Network will also broadcast Pro Class race coverage later on. Follow the AMSOIL Inside Track at blog.AMSOIL.com to stay up to date on all the latest AMSOIL racing news and updates.



PRODUCTS THE PROS USE

- **Maximum** wear protection
- **Advanced** cold-temperature performance
- **Superior** deposit control
- **Excellent** for Polaris,* Ski-Doo* (E-TEC*), Arctic Cat* (C-TEC*), Yamaha* & more



To show our support for riders and to double-down on our confidence in our snowmobile oil, we offer the Runs on Freedom™ Limited Snowmobile Warranty.

It covers engine repairs for two years or 5,000 miles (8,000 km), whichever comes first, on current-model-year or newer sleds that use INTERCEPTOR® Synthetic 2-Stroke Oil exclusively.

Get details and register at AMSOIL.com/rofwarranty (AMSOIL.ca/rofwarranty in Canada).

2022-2023 AMSOIL CHAMPIONSHIP SNOCROSS SCHEDULE

Dec. 16-18	All Finish Concrete Snocross National	Fargo, N.D.
Jan. 13-14	Pirtek Snocross National	Shakopee, Minn.
Jan. 27-28	U.S. Air Force Snocross National	Deadwood, S.D.
Feb. 17-18	U.S. Air Force Snocross National	Salamanca, N.Y.
March 3-4	Sioux Falls Snocross National	Sioux Falls, S.D.
March 10-11	AMSOIL Snocross National	Elk River, Minn.
March 24-25	Cannonsburg Snocross National	Grand Rapids, Mich.
April 1-2	Theisen's Snocross National	Dubuque, Iowa



Mark Nyholm | STAFF PRODUCT DEVELOPMENT ENGINEER AND MECHANICAL R&D MANAGER

3 Ways to Boost Diesel Truck Performance

A tuner, upgraded turbo and improved fuel delivery are cost-effective diesel power adders.

Here we are in 2022, about 20 years after the diesel-truck-performance industry exploded when enthusiasts took the slow, loud, unrefined diesel pickup beyond its original design intent. Lots can happen in 20 years, and boy has it. Everything from reliable daily drivers delivering 4X OEM power, to sub-4-second drag trucks, to millions in EPA fines.

No other platform lets you bolt on more power adders than a diesel pickup. Where else can you have a reliable 750-hp truck that can pull a camper one day, go off-roading another day and finish the weekend on the drag strip stomping much of the competition? Right, you can't.

Popular Diesel Power Adders

How do enthusiasts make all that diesel power? First, it's important to realize that power costs money. Go to any event or track and you'll see – the fastest drivers have the most money invested into their vehicles. Now that we've gotten that painful fact out of the way, let's talk about the three most common ways to add power.

Electronic Programming

Otherwise known as a tuner, this handy little device reflashes the ECM and adjusts fuel and air delivery to make more power. A plug-and-play version can easily add 50-200 hp, depending on the tuner. And they are cheap to buy. Be careful, though; this is where you start running into legal power and illegal power if the tuner deletes OEM emissions technology.

With a couple taps of a button – Wham! Lots more power. Is it reliable? Yes and no, depending on how far you go.

Your transmission, however, is not designed to handle the extra power. Soon you'll be over-running the torque converter or your clutches. Or both. So, if you want to add 150 hp or more, prepare to spend money on your transmission.

Forced Induction

In the diesel world, we really mean "turbocharging" since very few diesels use a supercharger. The turbo does all the heavy lifting of forcing air into the combustion chamber. Thanks to the invention of the common-rail fuel system, the engine will get ample fuel. But, with aggressive tuning, the stock turbo just won't deliver enough air.

You can solve this dilemma with an aftermarket turbo, but before you buy one, read the volumes of online articles about which one to choose. There are designs that are best for towing, racing and daily driving.

Like many things, diesel engine perfection is hard to achieve. You can't go too big with horsepower gains without reducing performance elsewhere. Go big or go home, I always say. Go too big without the right combination of other components, however, and you'll go nowhere.

Fuel Delivery

This area can include the injectors and fuel pump.

The fuel pump could be a lift pump or the CP3 or CP4 pump on the engine. If you've been around the block long enough, you've read about the issues with the CP4 pump failing, allegedly due to incompatibility with modern diesel fuel, which contains less sulfur

to provide lubrication. It's one of the reasons I always use AMSOIL diesel fuel additives to boost lubricity and protect the pump.

The same can be said for the fuel injectors. As I said earlier, you run out of air before fuel. But, if you have enough air, you'll quickly run out of fuel. To get more fuel to the engine, you need to ensure you have a pump that can supply it and a set of injectors that can spray it.

This is a good time to check the condition of your high-pressure fuel pump and ensure you have a good lift pump feeding it.

Once you have the supply side addressed, it's time to revisit your horsepower goal and intended purpose for the truck.

Aftermarket injectors use a different set of nozzles with bigger holes that can spray more fuel. But it's important to coordinate the spray volume and air-charge volume with the tune that is controlling your injectors.

Even in this plug-and-play world we've been enjoying for 20 years, you still need a plan. If you under- or over-size certain components, the truck won't like it. Communicating your horsepower goal to your aftermarket partners will set you up for success.

JEEP WORLD

PART 1: HISTORY OF A LEGEND

When “jeeps” rolled off assembly lines and into battle during World War II, they were immediately loved by GIs and, soon after, the American people. In the 80 years since, that “thing” enthusiasts have for Jeeps* has remained strong. The brand still elicits a sense of freedom and adventure with its rugged style and off-road capability. Most Jeep enthusiasts take their vehicles further, modifying them to be even more capable. In this issue, we explore the history of the Jeep brand.

WWII | 1940s

Like AMSOIL, Jeep has its roots in the military. The U.S. Army put out a request for proposal in 1940 for a general-purpose vehicle that was small, lightweight, had four-wheel drive and could carry a light machine gun. American Bantam* and Willys-Overland* both stepped up with design proposals. While the Army began testing those prototypes, they also reopened the door to other automakers, notably Ford* with its massive production capacity.

The final Jeep design was a mashup of the best from each proposal: The Bantam Spicer*-sourced four-wheel transmission and differential was mated with the Willys Go-Devil* engine and fitted with the bodywork configuration of the Ford Model GP*.

From fewer than 100 jeeps in 1940, almost 8,500 were built in 1941 in three different versions by Bantam (BRC-40), Willys (MA) and Ford (GP). Willys struggled to reduce the weight of the MA prototype to the U.S. Army specification of 2,160 pounds, coming in about 400 pounds over. But after rigorous testing, Willys was awarded the contract in July 1941 with an initial order of 16,000 MBs at a unit price of \$738.74. Today, the MA is the rarest of all pre-production Willys, with only about 30 known in existence.

The simple and tough jeep was an essential tool that helped win the war. The MB rendered other military vehicles obsolete, including horses and motorcycles with sidecars. Not only did they have more capability and versatility than other light vehicles, they could

also be modified for other duties, such as battlefield ambulance work, snow plowing, desert patrols, firefighting and more. They were burly enough to go almost anywhere and light enough to be picked up and moved by GIs when they were really stuck.

Civilian Life | 1945

The CJ was the first post-WWII Jeep-brand vehicle. The target market for Willys-Overland was the 5.5 million farmers in the U.S. The CJ could do the job of two draft horses at a speed of four miles per hour for 10 hours a day. Farm implements and industrial tools were fitted with power from a PTO. Jeeps became the platform for hundreds of applications, including the Zamboni* ice resurfacing machine.

The debut of the 463 Jeep Station Wagon in July 1946 marked the first all-steel station wagon and the forerunner of the Grand Cherokee* (vehicle code WK).

Rise of Off-Road Recreation | 1950s

The 1950s were marked by engineering milestones, and the off-road Jeep enthusiast began to emerge. The M38, popularized in the TV show M*A*S*H, served in the Korean War. It was essentially a combat-ready version of the CJ-3A with a stronger frame and suspension and could be driven under water.

Willys updated its CJ line in 1953 with more horsepower, capability and comfort. Component upgrades with the 81-inch wheelbase helped feed interest in off-road vehicles. The CJ-5 had a production run of 30 years, the longest

for any Jeep-brand vehicle. The CJ-6 is basically a CJ-5 with a longer wheelbase (101 inches); it's prized by collectors.

Wagoneer* and Commando* | 1960s

The Jeep Wagoneer ushered in an era of off-road-capable vehicles with luxurious interiors. It was the first 4x4 vehicle with an automatic transmission, independent suspension, overhead-cam six-cylinder truck engine and automatic full-time 4x4 system.

The SJ line of vehicles included the Wagoneer, early Cherokee* models and Gladiator* and J-Series* trucks. The SJ line was in production for more than 28 years.

The release of the Super Wagoneer* in 1965 upped the arms race for power and luxury and helped pave the way for the modern SUV. The Super Wagoneer carried a \$5,943 price tag – almost double that of the base Wagoneer.

With recreational off-roading on the rise, the Jeepster Commando* stepped in to compete with the Bronco* and Land Cruiser.* The Jeepster Commando (C-101) was built on a CJ-6 chassis and used the “Dauntless” V6 engine.

The AMC* Years | 1970s

By the 1970s, 4x4s were becoming quite popular and Kaiser* sold the Jeep brand to American Motors* (AMC) in 1970 for \$75 million.

The Quadra-Trac* 4x4 System was released in 1972 as the first automatic full-time four-wheel-drive system. AMC brought back the Cherokee as a sporty, two-door version of the Wagoneer

with featured bucket seats and sports steering wheel.

In 1976, AMC introduced the CJ-7 with a slightly longer wheelbase than the CJ-5 to allow space for an automatic transmission. The CJ-7 featured squared-off door openings compared to the CJ-5, which is a quick way to tell them apart. For the first time, the CJ-7 offered an optional molded plastic top and steel doors.

In 1978, Mark Smith, who is widely known as the father of modern four-wheeling, made history by leading a group of 13 explorers from Tierra del Fuego, Chile to Prudhoe Bay, Alaska using Jeep CJ-7s. The 21,000-mile route took 122 days to complete. AMSOIL was a part of the epic journey as AMSOIL synthetic lubricants were used to help ensure reliability and longevity of the Jeeps.

Rise of CUVs | 1980s & 90s

The 1980s marked the beginning of efforts to improve fuel efficiency. The Cherokee (XJ) was reintroduced with a unibody design and compact dimensions. It was the first vehicle with two available 4x4 systems: Command-Trac* Part-Time and Selec-Trac* Full-Time 4x4. XJs are popular with enthusiasts for their off-road capability and possibilities for aftermarket modifications.

AMC discontinued the CJ series and introduced a new Jeep Wrangler* (YJ) in 1986.

Then, in 1987, AMC was sold to Chrysler* and the Jeep brand became part of the Chrysler Jeep/Eagle Division.*

The Scrambler* pickup was replaced by the Comanche.* It didn't light up sales at the time, but today the Scrambler is popular among collectors and off-road builders.

New Capability | 2000s

The merger of Daimler-Benz* and Chrysler in 1998 resulted in new vehicle models. In 2001, a new Cherokee (KJ) replaced the previous Cherokee (XJ). The 2003 Wrangler Rubicon* brought capability to a new level. A revamped Grand Cherokee (WK) debuted in 2004, and a seven-passenger Jeep Commander* was introduced in 2006. A new Jeep Cherokee (KK) was introduced in 2008.

The Jeep Wrangler and Wrangler Unlimited* (JK) were introduced in 2007. The Wrangler is the modern-day descendant of the original Willys MB and remains a favorite of enthusiasts. It featured the signature seven-slot grille, round headlamps, solid axles, removable doors, exposed hinges and fold-down windshield – all with new levels of capability and versatility.

Modern Times | 2010 - Present

In 2016, global Jeep sales increased to 1.41 million units before reaching a current plateau of 1.7 million units.

The modernized 2014 Cherokee (KL) replaced the Liberty.* The Grand Cherokee Trailhawk* model was introduced in 2017 and includes the standard Quadra-Lift* Air Suspension, the Quadra-Drive* II 4x4 System, all-terrain tires and a skid plate package.

Jeep started the 2020s by reintroducing the Jeep Gladiator pickup, introducing the three-row Jeep Grand Cherokee L, upping power in the Jeep Wrangler Rubicon 392 and launching plug-in hybrid electric vehicles — the Wrangler 4xe and Jeep Grand Cherokee 4xe.

The Wrangler Rubicon 392 has 4x4 Trail Rated* capability with an electronic sway bar disconnect feature for massive articulation of the front tires. It enables steep climbs with a ramp travel index of 730. Maneuverability was improved with Fox* 2.0 monotube shocks and Dana* 44 wide-track axles with electronic lockers and 33-inch tires.

Most Jeep models on the road today will have the 3.6L Pentastar* V6 gasoline engine. Jeep has not widely used forced induction, but as engine downsizing progresses, expect more turbo Jeeps in the market like the 2.0L turbo offered today.



THE COOLANT LIFE

Coolant is a hard-working fluid. Heat produced by combustion must be removed to prevent overheating. Some of that heat escapes with the exhaust and some is absorbed by the engine block. But to keep heat within the engine's operating temperature range, coolant must be pumped through the engine to the radiator, where excess heat can be dissipated.

Besides aiding engine-temperature regulation, a quality coolant will also protect against:

- **Corrosion** that damages metal components.
- **Scaling** that interferes with heat transfer.
- **Cavitation** and pitting that damage cylinder liners (heavy-duty applications).

How important is it?

Coolant-system issues account for about 40% of engine problems, often due to motorists neglecting to maintain their coolant. It's easy to see why – coolant is a long-drain-interval product. With service intervals of around five years (and longer in heavy-duty applications), it's not top-of-mind. Compare that to engine oil, which is changed at least yearly and sometimes more often.

Coolant consists of a base (typically ethylene glycol or propylene glycol) mixed with additives and water. The base is primarily responsible for keeping the engine from turning into a block of ice in winter and a geyser in summer. Mixing water with coolant raises boil-over protection to around 265°F (129°C) and freeze protection to around -34°F (-37°C). The additives guard against corrosion, cavitation and scaling, while water effectively removes heat from the engine.



Coolant neglect leads to all kinds of problems, particularly if using inexpensive conventional green coolants found at almost every retailer. For example, corrosion occurs when an imbalanced coolant chemically reacts with metallic surfaces, forming reddish deposits that can appear as sludge or slime. Fouling can occur from contamination of the cooling system by microorganisms that create sludge and fouled surfaces with byproducts of rust or corrosion. As coolants age, the chemical protection of the metal surfaces breaks down and sludge accumulates.

The additives in green coolants use inorganic-acid technology (IAT), which relies exclusively on inorganic salts such as nitrites, phosphates and silicates for protection. Formulating exclusively with inorganic salts has drawbacks. They deplete rather quickly and can lead to scale buildup and sludge if maintenance is neglected.

One solution is to formulate the coolant using organic-acid technology (OAT). These coolants don't contain phosphates, silicates or other inorganic salts, virtually eliminating problems associated with conventional green coolants. They also last longer.

Another solution is hybrid organic-acid technology (HOAT). These coolants rely heavily on organic acids, but strategically use some inorganic salts to take advantage of their protective properties. A properly formulated HOAT coolant delivers long service life and excellent protection. Think of it as a belt-and-suspenders approach to protection.

Whichever coolant you use, it's best to flush the system about every five years to maintain its health.

Some do-it-yourselfers simply place a drain pan under the radiator and open the petcock. While it's better than nothing, this quick-and-dirty coolant service only removes about half the fluid.

Heavy-duty diesel operators often use supplemental coolant additives (SCAs). They're designed to be added to the coolant about halfway through the service interval, replenishing the additives that have depleted.

Coolant-system issues account for about **40% of engine problems**, often due to motorists neglecting to maintain their coolant.

That sounds like a decent solution, but SCAs have drawbacks. For starters, they're a hassle. The operator must test the coolant using test strips and match the color of the strip to a chart. The risk is adding too much SCA, which can cause additive "dropout." This occurs when the additives separate from the coolant base and form sludge and slime that plug coolant passages. Too much SCA can also lead to scale buildup, which inhibits heat-transfer.

Fortunately, there's a better way. You can use a high-quality coolant that doesn't require the hassle of SCAs and does a better job of fighting common problems like scale, sludge and slime.

AMSOIL provides such a coolant: Heavy-Duty Antifreeze & Coolant (ANTHD). It uses a HOAT formulation that delivers excellent protection against overheating and corrosion for up to 1 million miles (1,609,344 km), 20,000 hours or 8 years, whichever comes first, and it doesn't require the hassle of adding an SCA.

For passenger car/light-truck owners, AMSOIL Passenger Car & Light Truck Antifreeze & Coolant (ANTPC) features an OAT formulation that eliminates additive drop-out, scaling and other issues inherent to conventional coolants. It's pre-mixed 50/50 with high-quality water and is compatible with all ethylene and propylene coolant colors.

AMSOIL Low Toxicity Antifreeze & Engine Coolant (ANT) is the solution for those who want a low-toxicity, biodegradable coolant. Its HOAT formulation delivers excellent protection for up to 150,000 miles (241,000 km) or 5 years, whichever comes first, in passenger cars and light trucks. In heavy-duty applications, it lasts 1 million miles (1,609,344 km), 20,000 hours or 8 years, whichever comes first. It's compatible with all ethylene and propylene coolant colors.

The coolant system is critical for vehicle performance and longevity. If it's been a while, now is an excellent time to give your system a flush and a fresh start with an AMSOIL coolant.



Winning. Period.

Lyle Barnett is driven to win – and help others along the way.

Lyle Barnett knows what drives his passion to race: “Winning, period. There are influencers and there are racers out there. Win, lose or draw they’re happy to be there. I’m not OK with that. We’re there to win.”

Barnett is an increasingly successful NHRA driver. He recently achieved one of the biggest wins in drag racing, capturing an NHRA U.S. Nationals Pro Mod victory in September at the Indianapolis Raceway Park.

But, even with that level of success, he may still be best known as the charismatic driver of Beer Money, a ratty looking Mustang* that became a reality show winner and drag-strip brawler in small-tire, no-prep racing. And all of this has come after an accident that nearly ended his life.

THE LONGEST 28 SECONDS

In September 2015 at 24 years old, Barnett was prepared to go faster than he had ever gone at the South Georgia Motorsports Park.

“Our goal going down there was to go 190-plus and potentially go 4-0,” recounts Barnett.

But in the finals, an injector let go. That set went lean, burned through the back of the head via one of the oil passages and turned into a “flame thrower” that sent flames into Barnett’s face and helmet. He let go of the steering wheel as he tried to bat at the flames. The car nosed into the wall, exploding a fuel cell and raising the interior to an estimated 1,500°F (816°C).

Moments later, with his seatbelt melted off, Barnett managed to open his door and roll out. Track safety workers used fire extinguishers on him to put out the

flames. And then he lost consciousness for two weeks.

Barnett’s burns were most severe where he was under-protected: his face, head and hands. He says his lung damage was also extreme, the “equivalent of smoking 730,000 cigarettes in 28 seconds,” the length of time he was engulfed in flames.

“We strictly base the decision to use AMSOIL [products] on what we see in the engines after 25 to 30 runs.”

But incredibly, Barnett didn’t just survive, he kept looking forward. He returned to racing with a bang in February 2017 by etching his name into the history books as the driver of the first leaf-spring car under 4.20 in the 1/8th mile.

“I’ll be honest,” said Barnett, “there’s not a whole lot of negative that came from the accident. The two months in ICU and 20-plus surgeries; there’s a lot that I went through for a couple years there. But that was one of the most humbling experiences ever. It proved how precious life is and how quickly it can change.”

NO-PREP RACING

Outlaw drag racing is dangerous, even on a racetrack.

“Small tire, no prep is what I run with now,” said Barnett. “It’s really the evolution of street racing, one of those black-market deals that you don’t really talk about, and if you don’t know about it,

you don’t know.”

“No prep” means that the racetrack surface is not prepared with traction compounds as it is for most drag racing, keeping it more like a normal street. The result is, no-prep drivers often run on less-consistent courses and without top-level safety gear.

“Outlaw drag racing doesn’t follow a racing body,” said Barnett. “Safety tech was not really a thing and my accident changed that. I’ve said all along, if I saved one life, I’ve done my job.”

Since his accident, Barnett has been speaking out for reforms to make safety “more proactive and less reactive.”

“You’ve got to have on good stuff,” he said.

THE PERFECT TUNE

Beer Money churns out 1,700 hp.

“In general, we make more horsepower than we can use,” explained Barnett. “As long as the tire doesn’t spin, you can basically go as fast as you want to go.”

Managing that power requires driving skill and, in part, a tuning aspect, whether through timing, boost or traction control. Barnett has a secret tuning weapon in his longtime friend, Pete Harrold of Harrold Dyno Race Engines.

“When I first started racing, Pete was an arch nemesis of mine,” said Barnett. “He was a tuner and part-time driver and they used to kick my ass all the time, and I would’ve sworn they were cheating. As they say, if you can’t beat ’em, join ’em. So, in 2015 I joined Pete.

“Pete was the engine builder and tuner for Beer Money on the show. I provide him feedback on what the car is doing. We work well together.”

BEER MONEY

In 2017, Barnett was fan-voted onto season one of Horsepower Wars, a reality TV show centered on outlaw street racing. Each season is a shootout between four teams of six gearheads who have 10 days and \$10,000 to build a street-racing car. The winning team gets \$10,000 cash and keeps the car they built.

Beer Money was assembled from a 1989 Mustang and a stock block LS engine by team leader Eric Yost, Harrell, Barnett and fabricators Jason Smith and Chris Bailey.

"It cost about four weeks of my life and probably shaved about another 10 off," joked Barnett.

While Horsepower Wars was being shot, Barnett was interviewed by Netflix for Fastest Car. The show pits tricked-out sleeper cars against exotic supercars, like a 2011 Pontiac* minivan versus a Porsche* GT3.*

"I didn't necessarily have any sleepers and I definitely didn't have a super car," explained Barnett. "So, I had to tell them I didn't really have anything that fit. But I told them, 'If we win this show, I'll have the perfect car.'"

They won the show, and Barnett and Beer Money were on Fastest Car the following season. The reach of that show propelled Barnett's fame as a builder and driver.

"That's where I really got my following from," said Barnett. "That's where Beer Money got most of its fame."

PICKING UP OTHERS

Barnett uses his star power to raise money for families with kids in the JMS Burn Center at the Doctors Hospital in Augusta, Ga. where he was treated.

"There's nothing negative I could ever say about my experience, except of the crash itself," he said. "A lot of good has come out of it. For example, we've helped a lot of kids that have spent their Christmas holiday in the burn center."

He sees parents who take extended leaves or quit their jobs to be with their kids while they receive treatment and the financial toll that it takes on them. Barnett



helps as much as he can, sometimes as a motivational speaker at fundraisers for kids in the burn center.

"It's nice to be able to provide for those families," said Barnett.

THE AMSOIL DECISION

Barnett is a true believer in AMSOIL. He was introduced to AMSOIL through Harrold, who was an AMSOIL Dealer when he and Barnett started working together.

"He used everything from Break-in Oil to MP and Racing Oil," said Barnett.

"I have tried other brands, but always come back to AMSOIL. You can have great results elsewhere in the engine, but if bearing life isn't good, then it's time to make a change. Bearing life is just imperative.

"We strictly base the decision to use AMSOIL [products] on what we see in the engines after 25 to 30 runs. That is why we stayed with AMSOIL and why we have never turned back."



Sam Cook Productions | @samcookproductions

DRIVING FORWARD

Barnett still has goals to chase down.

"I don't think I'm done climbing," he said. "I have aspirations to go to top-fuel racing. It's something I've always wanted to do, and I may have the opportunity to at least license and see if I can catch a ride."

But, for now Barnett plans to continue with Beer Money as the flagship of his program.

"Some people may think that's sad, but I love that thing and it does pretty well. It may look like a pile of junk, but I love it."

Synthetic Gasoline Motor Oil



Signature Series Keeps Pistons Cleaner


Even after doubling the length of the industry-standard test, AMSOIL delivered **40% cleaner pistons** than required by the standard.^{FF}



^{FF}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

Signature Series Delivers Powerful Protection

AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 100,000-mile (160,934-km) test^F. AMSOIL provided far superior wear protection and kept bearings looking like new.

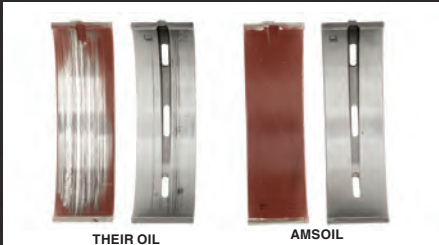

^FTesting conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.



Signature Series



Signature Series Synthetic Motor Oil

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 25,000 miles (40,200 km) or 1 year, whichever comes first.

● 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASMQT	EA	1 Quart	12.49	16.09
ASMQT	CA	12 Quarts	141.80	182.35
ASM1G	EA	1 Gallon	49.29	62.09
ASM1G	CA	4 Gallons	186.55	235.30

● 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1, WSS-M2C960-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ALMQT	EA	1 Quart	12.49	16.09
ALMQT	CA	12 Quarts	141.80	182.35
ALM1G	EA	1 Gallon	49.29	62.09
ALM1G	CA	4 Gallons	186.55	235.30

● 0W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C963-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AZQQT	EA	1 Quart	12.49	16.09
AZQQT	CA	12 Quarts	141.80	182.35
AZO1G	EA	1 Gallon	49.29	-
AZO1G	CA	4 Gallons	186.55	-

● 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1, WSS-M2C961-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASLQT	EA	1 Quart	12.49	16.09
ASLQT	CA	12 Quarts	141.80	182.35
ASL1G	EA	1 Gallon	49.29	62.09
ASL1G	CA	4 Gallons	186.55	235.30

● 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM LL-A-025, 6094M, 4718M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATMQT	EA	1 Quart	12.49	16.09
ATMQT	CA	12 Quarts	141.80	182.35
ATM1G	EA	1 Gallon	49.29	-
ATM1G	CA	4 Gallons	186.55	-

● 0W-40

Use in vehicles that require API SP, SN-PLUS, SN... • Chrysler MS-12633, MS-10725, MS-10850; Nissan GT-R

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AZFQT	EA	1 Quart	12.49	16.09
AZFQT	CA	12 Quarts	141.80	182.35

○ 5W-50

Use in vehicles that require API SP, SN-PLUS, SN... • Ford WSS-M2C931-C (Mustang) • GM dexos R

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMRQT	EA	1 Quart	12.49	16.09
AMRQT	CA	12 Quarts	141.80	182.35

Signature Series Fights Wear

AMSOIL Signature Series Synthetic Motor Oil provides **75 percent more engine protection against horsepower loss and wear** than required by a leading industry standard^A, extending the life of vital components like pistons and cams.

^ABased on independent testing of AMSOIL Signature Series 0W-20 using the ASTM D6891 standard test.

Signature Series Guards Turbos

Signature Series protects turbochargers **72% better** than required^C by the GM dexos1[®] Gen 2 specification.

^CBased on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.

Signature Series Protects Against LSPI

AMSOIL synthetic motor oils achieved **100% protection against LSPI**.^B

^BBased on zero LSPI events in five consecutive tests of AMSOIL Signature Series, XL and OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.

Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents^D to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge^{DD}.

^Dvs. AMSOIL OE Motor Oil

^{DD}Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN PLUS specification.

Signature Series Helps Keep Engines Cleaner

AMSOIL Signature Series is fortified with a heavy treatment of detergent additives, delivering **28 percent more acid-neutralizing power than Mobil 1*** and helping engines stay cleaner, longer.^{LL}

^{LL}Based upon independent testing of Mobil 1 Annual Protection Full Synthetic 5W-30 and AMSOIL Signature Series 5W-30 in ASTM D2896. Oils purchased July 2020. All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

Signature Series Resists Viscosity Increase

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL **delivered twice the viscosity control** required by the standard.^{GG}

^{GG}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.


Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).





XL Resists Oil Breakdown


XL provides **64% more protection** against oil breakdown^F than required by the GM dexos1[®] Gen 2 specification.

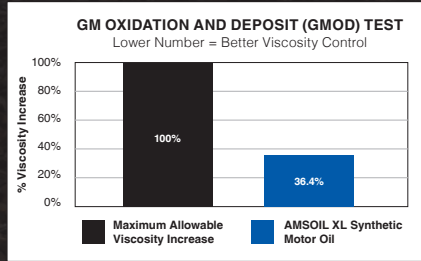

^FBased on independent testing of AMSOIL XL 5W-30 motor oil in the GMOD engine test required for the GM dexos1 Gen2 specification.

OE Protects Against Wear

OE provides **47 percent more** wear protection.^G

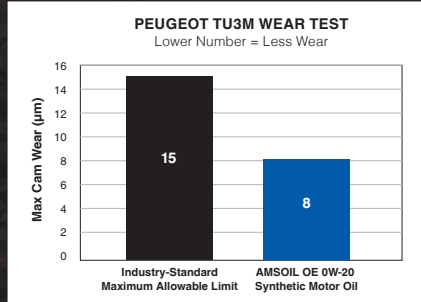

^GBased on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.





XL Synthetic Motor Oil

For enthusiasts who want to do something extra for their vehicle. Engineered for advanced automotive technology, including turbos and direct injection. Boosted formulation delivers more cleaning power and promotes longer engine life. Extra protection that lasts up to 12,000 miles (19,300 km) or 1 year, whichever comes first.

● XL 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLZQT	EA	1 Quart	9.89	13.09
XLZQT	CA	12 Quarts	112.25	148.15
XLZ1G	EA	1 Gallon	38.79	50.99
XLZ1G	CA	4 Gallons	146.95	193.10

● XL 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1, WSS-M2C960-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLMQT	EA	1 Quart	9.89	13.09
XLMQT	CA	12 Quarts	112.25	148.15
XLM1G	EA	1 Gallon	38.79	50.99
XLM1G	CA	4 Gallons	146.95	193.10

● XL 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1, WSS-M2C961-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLFQT	EA	1 Quart	9.89	13.09
XLFQT	CA	12 Quarts	112.25	148.15
XLF1G	EA	1 Gallon	38.79	50.99
XLF1G	CA	4 Gallons	146.95	193.10

● XL 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM 6094M, 4718M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLTQT	EA	1 Quart	9.89	13.09
XLTQT	CA	12 Quarts	112.25	148.15
XLT1G	EA	1 Gallon	38.79	50.99
XLT1G	CA	4 Gallons	146.95	193.10

○ XL 10W-40

Use in vehicles that require API SP, SN-PLUS, SN... • ACEA A3/B3, A3/B4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLOQT	EA	1 Quart	9.89	13.09
XLOQT	CA	12 Quarts	112.25	148.15
XLO1G	EA	1 Gallon	38.79	50.99
XLO1G	CA	4 Gallons	146.95	193.10


G1230



Tough-to-reach fill hole?

Order a flexible pour spout with your oil to make the job easier. Fits quarts and gallons.

PRODUCT	STOCK#	U.S. P.C.	CAN. P.C.
Flexible Pour Spout	G1230	0.80	1.05
FloTool Flexible Pour Spout	G3721	4.20	5.65



OE Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

● OE 0W-16

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6B

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OESQT	EA	1 Quart	7.49	9.99
OESQT	CA	12 Quarts	84.40	112.70

● OE 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEZQT	EA	1 Quart	7.49	9.99
OEZQT	CA	12 Quarts	84.40	112.70
OEZ1G	EA	1 Gallon	29.39	38.59
OEZ1G	CA	4 Gallons	111.10	146.05

● OE 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1, WSS-M2C960-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEMQT	EA	1 Quart	7.49	9.99
OEMQT	CA	12 Quarts	84.40	112.70
OEM1G	EA	1 Gallon	29.39	38.59
OEM1G	CA	4 Gallons	111.10	146.05

● OE 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1, WSS-M2C961-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEFQT	EA	1 Quart	7.49	9.99
OEFQT	CA	12 Quarts	84.40	112.70
OEF1G	EA	1 Gallon	29.39	38.59
OEF1G	CA	4 Gallons	111.10	146.05

● OE 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM 6094M, 4718M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OETQT	EA	1 Quart	7.49	9.99
OETQT	CA	12 Quarts	84.40	112.70

Oil Analyzers

AMSOIL offers oil analysis service options from Oil Analyzers Inc.® By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit www.oaitesting.com.

STOCK#	PKG./SIZE	U.S. P.C.	CAN. P.C.
KIT01	1 sample kit (includes two-way postage) - U.S.	28.35	—
KIT02	1 sample kit (includes UPS shipping) - U.S.	28.35	—
KIT06	1 sample kit - U.S.	20.50	—
KIT14	1 value sample kit - U.S.	15.70	—
KIT401	1 sample kit (includes UPS shipping) - CAN.	—	52.05
KIT402	1 sample kit - CAN.	—	32.45
G1206	Oil Suction Pump w/10-ft. hose	26.25	34.65
G1571	Replacement Hose 25-ft.	8.35	11.00

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).



Synthetic European Motor Oil



“My engine sounds better than it ever has. My BMW* has 70,000+ miles and has never sounded this good or smooth. You can tell a lot about engines just from the sound and this baby is purring like I’ve never heard it purr. I am very pleased and glad I made the switch to AMSOIL.”

– **Tom**
Atlanta, Ga.



Synthetic European Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks.

● 0W-20 LS-VW³¹

Use in vehicles that require API SN-PLUS, SN... • ACEA C5 • Porsche C20 • VW 508.00/509.00/TL52577

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EZTQT	EA	1 Quart	11.59	15.49
EZTQT	CA	12 Quarts	131.15	175.35

● 0W-20 LS

Use in vehicles that require API SN-PLUS (Resource Conserving), SN, SM... • ILSAC GF-5, GF-4... • ACEA C5, A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFEQT	EA	1 Quart	10.79	14.49
AFEQT	CA	12 Quarts	122.05	164.60

● 0W-40 FS

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • MB 229.1/229.3/229.5 • Porsche A40 • Renault 0710, 0700 • VW/Audi 502.00/505.00

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EFOQT	EA	1 Quart	11.19	14.39
EFOQT	CA	12 Quarts	127.00	163.35

● 5W-30 LS¹³

Manufacturer Approvals: VW 504.00/507.00

Use in vehicles that require API SN • ACEA C3 • GM dexos2 • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AELQT	EA	1 Quart	13.99	17.89
AELQT	CA	12 Quarts	158.40	203.20
AEL1G	EA	1 Gallon	54.99	—
AEL1G	CA	4 Gallons	208.50	—

● 5W-40 MS

Manufacturer Approvals: MB 229.51 • Porsche A40

Use in vehicles that require ACEA C3 • API SN/SM/CF... • BMW LL-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2 (supersedes LL-A-025 and LL-B-025) • Renault RN0700/RN0710 • VW/Audi 502.00/505.01

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFLQT	EA	1 Quart	11.89	15.29
AFLQT	CA	12 Quarts	134.55	173.45
AFL1G	EA	1 Gallon	46.69	59.19
AFL1G	CA	4 Gallons	176.90	224.30

● 5W-40 FS¹³

Manufacturer Approvals: MB 229.5 • Porsche A40 • VW/Audi 502.00/505.00

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • Renault 0710, 0700

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EFMQT	EA	1 Quart	8.89	11.89
EFMQT	CA	12 Quarts	100.95	134.85
EFM1G	EA	1 Gallon	35.09	46.09
EFM1G	CA	4 Gallons	132.90	174.50

^{31,13}See page 47 for Proposition 65 information for this product.

Synthetic Classic/Collector Car Motor Oil

AMSOIL Delivers Superior Rust Protection

In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.¹¹



¹¹Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.





Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.

● 10W-30

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRTQT	EA	1 Quart	11.59	14.99
ZRTQT	CA	12 Quarts	131.70	169.65

● 10W-40

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRDQT	EA	1 Quart	11.59	14.99
ZRDQT	CA	12 Quarts	131.70	169.65

● 20W-50

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRFQT	EA	1 Quart	14.09	18.09
ZRFQT	CA	12 Quarts	159.25	205.10

Assembly Lube¹⁷

Formulated to cling to engine parts and provide exceptional wear protection in newly built or rebuilt high-performance, racing and other four-stroke engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EALTB	EA	(1) 4-oz. Tube	8.59	10.89
EALTB	CA	(12) 4-oz. Tubes	96.95	123.45

● Break-In Oil¹⁷

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
BRKQT	EA	1 Quart	8.89	11.69
BRKQT	CA	12 Quarts	100.95	132.95

Premium Protection Synthetic Motor Oil

Ideal for gasoline engines and diesel applications not equipped with diesel particulate filters (DPF), where the extra protection of a high-zinc and TBN formula is desired.

● 10W-40¹³

Use in vehicles that require API CI-4+/SL..., ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo VDS-2, VDS • Mack EO-M+ • ACEA A3/B3/E3/E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMOQT	EA	1 Quart	11.79	15.39
AMOQT	CA	12 Quarts	133.60	174.75
AMO1G	EA	1 Gallon	46.39	—
AMO1G	CA	4 Gallons	175.60	—
AMOTP	EA	(1) 2.5 Gallon	114.70	—
AMOTP	CA	(2) 2.5 Gallons	217.40	—

● 20W-50

Use in vehicles that require API CI-4+/SL..., ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo VDS-2, VDS • Mack EO-M+ • ACEA A3/B3/E3/E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AROQT	EA	1 Quart	12.29	16.19
AROQT	CA	12 Quarts	139.50	183.60
ARO1G	EA	1 Gallon	48.39	—
ARO1G	CA	4 Gallons	183.45	—

^{17,13}See page 47 for Proposition 65 information for this product.

Synthetic Racing Oil



“AMSOIL products are the best on the market and definitely give us an added performance factor.”

— Bryce Menzies
Professional Off-Road Driver





DOMINATOR® Synthetic Racing Oil

Superior performance and maximum protection in high-performance and racing applications.

5W-20¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD20QT	EA	1 Quart	14.39	18.39
RD20QT	CA	12 Quarts	163.45	208.90

10W-30¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD30QT	EA	1 Quart	13.79	17.79
RD30QT	CA	12 Quarts	156.85	201.95

15W-50¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD50QT	EA	1 Quart	14.49	18.59
RD50QT	CA	12 Quarts	164.40	210.80
RD501G	EA	1 Gallon	57.19	-
RD501G	CA	4 Gallons	216.65	-

SAE 60¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD60QT	EA	1 Quart	14.99	19.09
RD60QT	CA	12 Quarts	169.70	217.15

20W-50 Synthetic Competition Diesel Oil¹⁸

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
DCOQT	EA	1 Quart	12.99
DCOQT	CA	12 Quarts	146.95
DCO1G	EA	1 Gallon	50.99
DCO1G	CA	4 Gallons	193.35

Briggs & Stratton Synthetic 4T Racing Oil¹⁷


Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GBS2960	EA	1 Quart	11.25	14.95
GBS2960	CA	12 Quarts	134.90	179.40

DOMINATOR® Protects Better

DOMINATOR Competition Diesel Oil delivers **50% more** film thickness⁹ to withstand high cylinder pressures and protect against wear.

HIGH-TEMPERATURE/HIGH-SHEAR (HTHS) VISCOSITY
Higher = Better Wear Protection

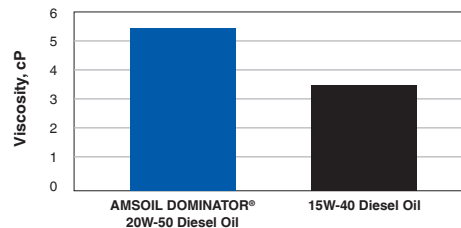

⁹Compared to the 3.5 cP HTHS limit for SAE 15W-40.

^{17,18}See page 47 for Proposition 65 information for this product.

Synthetic Diesel Oil




Keeps Turbos Clean

Signature Series Max-Duty Synthetic Diesel Oil provides protection boosted to the max, delivering up to **60% better turbo cleanliness¹** and withstanding the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower.

¹Based on specification standards of CAT C13 2nd Ring Top Land Carbon testing.

AMSOIL Fights Wear

AMSOIL delivers **powerful engine protection**. How good is it? In independent testing compared to a leading brand, AMSOIL Signature Series Diesel Oil provided long-lasting wear protection, **keeping cylinder liners looking like new.**^{DD}

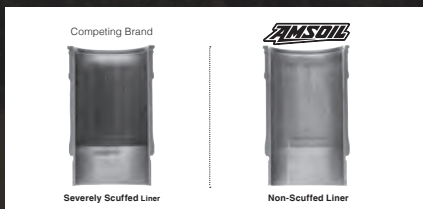

^{DD}Based on independent testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel[®] DD13 Scuffing test for specification DFS 93K222.


Protects Against Rust

Signature Series Max-Duty Synthetic Diesel Oil provides up to **2X better rust protection.**^K

^KBased on industry standard testing using the NMMA FC-W Rust Test.

Reduces Oil Consumption

Heavy-Duty Synthetic Diesel Oil provides up to **66% less** oil consumption, while Signature Series Max-Duty Synthetic Diesel Oil provides up to **76% less** oil consumption.^L

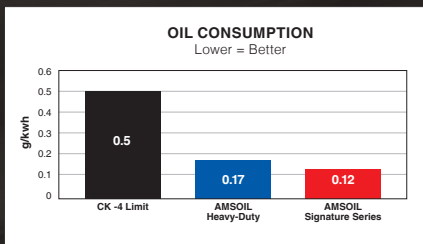

^LThan required by the API CK-4 standard in the Caterpillar-1N oil consumption test.

DHD



Signature Series Max-Duty Synthetic Diesel Oil

The top tier of AMSOIL protection and performance for diesel engines. **Provides 6X more engine protection.¹**

● 5W-30¹³

Use in vehicles that require API CK-4/SN, SN+, CJ-4... ACEA E9, E7, E6 · Mack EOS-4.5, EO-O · DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.51, 228.31 · MTU Type 3.1, 2.1, II, I · MAN 3677, 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC IV-10 LA, DQC III-10 LA · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C214-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DHDQT	EA	1 Quart	11.69	15.39
DHDQT	CA	12 Quarts	132.40	174.75
DHD1G	EA	1 Gallon	45.89	60.29
DHD1G	CA	4 Gallons	174.00	228.35
DHDT	EA	(1) 2.5 Gallon	113.60	-
DHDT	CA	(2) 2.5 Gallons	215.35	-

DDT



● 10W-30¹³

Use in vehicles that require API CK-4/SN, CJ-4... Volvo VDS4.5, VDS4, VDS3 · Mack EOS-4.5, EO-O · Renault RLD-4, RLD-3 · Cummins CES20086, CES20081 · Caterpillar ECF-2, ECF-3, ECF-1-a · DFS 93K222, DDC 93K218, 93K215, 93K214 · ACEA E9, E7 · MB 228.31 · MAN 3575 · MTU Type 2.1, II, I · JASO DH-2 · Deutz DQC III-10LA · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DDT1G	EA	1 Gallon	45.89	60.19
DDT1G	CA	4 Gallons	173.65	227.90
DDTTP	EA	(1) 2.5 Gallon	113.40	-
DDTTP	CA	(2) 2.5 Gallons	214.95	-

DEO



● 5W-40¹³

Use in vehicles that require API CK-4/SN, CJ-4... ACEA E9, E7 · Mack EOS-4.5, EO-O · DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DEOQT	EA	1 Quart	11.39	15.09
DEOQT	CA	12 Quarts	129.55	171.55
DEO1G	EA	1 Gallon	44.89	58.89
DEO1G	CA	4 Gallons	170.20	223.05
DEOTP	EA	(1) 2.5 Gallon	111.15	145.45
DEOTP	CA	(2) 2.5 Gallons	210.65	275.70

DME



● 15W-40¹³

Use in vehicles that require API CK-4/SN, CJ-4... ACEA E9, E7 · Mack EOS-4.5, EO-O · DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DMEQT	EA	1 Quart	11.19	14.79
DMEQT	CA	12 Quarts	126.90	167.75
DME1G	EA	1 Gallon	43.99	57.69
DME1G	CA	4 Gallons	166.70	218.60
DMETP	EA	(1) 2.5 Gallon	108.80	142.45
DMETP	CA	(2) 2.5 Gallons	206.25	270.00

● 0W-40¹³

Delivers **4X better cold-temperature performance** when compared to SAE 15W-40 oil in ASTM D5293 Cold Cranking Viscosity test.

Use in vehicles that require API CK-4/SN, CJ-4... ACEA E9, E7 · Mack EOS-4.5, EO-O · DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DZFQT	EA	1 Quart	11.59	15.29
DZFQT	CA	12 Quarts	131.10	173.45
DZF1G	EA	1 Gallon	45.49	59.69
DZF1G	CA	4 Gallons	172.25	226.00

¹³than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 5W-30 as worst-case representation. ¹²See page 47 for Proposition 65 information for this product.

DZF





Heavy-Duty Synthetic Diesel Oil

Outstanding protection and performance for customers seeking an upgrade over conventional, synthetic-blend and other synthetic diesel oils. **Provides 4X more engine protection.¹**

● 10W-30¹³

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADNQT	EA	1 Quart	7.79	10.39
ADNQT	CA	12 Quarts	88.00	117.75
ADN1G	EA	1 Gallon	30.59	—
ADN1G	CA	4 Gallons	115.65	—
ADNTP	EA	(1) 2.5 Gallon	75.15	98.70
ADNTP	CA	(2) 2.5 Gallons	142.45	187.10

● 5W-40¹³

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADOQT	EA	1 Quart	8.09	10.89
ADOQT	CA	12 Quarts	91.60	123.45
ADO1G	EA	1 Gallon	31.79	41.99
ADO1G	CA	4 Gallons	120.45	159.10
ADOTP	EA	(1) 2.5 Gallon	78.35	103.20
ADOTP	CA	(2) 2.5 Gallons	148.45	195.60

● 15W-40¹³

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADPQT	EA	1 Quart	7.79	10.39
ADPQT	CA	12 Quarts	88.05	117.75
ADP1G	EA	1 Gallon	30.59	40.19
ADP1G	CA	4 Gallons	115.65	152.35
ADPTP	EA	(1) 2.5 Gallon	75.15	98.65
ADPTP	CA	(2) 2.5 Gallons	142.45	186.95

100% Synthetic Diesel Oil

Provides outstanding protection, performance and fuel economy for smaller American diesel pickups, vans, cars and SUVs. **Delivers up to 6X better engine protection²** than required by a leading industry standard.

● 0W-20

Use in vehicles that require GM dexosD

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DP020QT	EA	1 Quart	10.19	13.69
DP020QT	CA	12 Quarts	115.60	155.75

● 5W-30

Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSSM2C214-B1 • ACEA C3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DP530QT	EA	1 Quart	10.09	13.59
DP530QT	CA	12 Quarts	114.70	154.50

● 15W-40 Synthetic Heavy Duty Diesel and Marine Oil¹³

Provides outstanding protection for on- and off-road diesel applications not equipped with diesel particulate filters (DPFs), where extra TBN is desired for long service intervals.

Use in vehicles that require API CI-4+/SL... • Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMEQT	EA	1 Quart	11.79	15.49
AMEQT	CA	12 Quarts	133.10	176.00
AME1G	EA	1 Gallon	46.19	60.49
AME1G	CA	4 Gallons	174.90	229.15
AMETP	EA	(1) 2.5 Gallon	114.25	149.50
AMETP	CA	(2) 2.5 Gallons	216.50	283.40

Like Heavy Duty Diesel and Marine Oil? Try Signature Series Max-Duty 15W-40 for a serious upgrade. See page 25.

¹than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 10W-30 as worst-case representation. ²Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation. ¹³See page 47 for Proposition 65 information for this product.

Synthetic Transmission Fluid



Signature Series Synthetic ATF

Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants.

● Multi-Vehicle³⁷

Use in applications that require Allison C-4, TES-389 - BMW 7045E, 8072B, LA 2634, LT 71141 - Chrysler ATF+4, Mopar ASRC, 68089195AA, 68049954AA - Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 - GM DEXRON II, DEXRON III, AutoTrak II - Honda/Acura ATF-Z1 - Hyundai/Kia SP-II, SP-III, Red-1 - IDEMITSU K17 - JASO 1A - JWS 3309, 3314, 3317 - MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F - Mazda ATF-M III, ATF-MV, F-1 - Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 - Mitsubishi SP-II, SP-III, ATF-J2 - Nissan Matic-D, Matic-J, Matic-K, 402 - Saab 3309 - Shell 3403, LA 2634 - Subaru ATF, ATF-HP - Suzuki 3314, 3317 - Texaco ETL-7045E, ETL-8072B, N402 - Toyota Type T, T-II, T-III, T-IV - Voith 55.6335, 55.6336 - Volvo 97340, 97341 - VW/Audi G 052 162, G 052 990, G 055 025 - ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 14C, 16L, 17C, 20B, 20C, 21L

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATFQT	EA	1 Quart	14.59	18.59
ATFQT	CA	12 Quarts	165.30	210.80
ATFPK	EA	1 Quart Easy-Pack	16.09	20.59
ATFPK	CA	12 Quart Easy-Packs	183.10	233.60
ATF1G	EA	1 Gallon	57.49	-
ATF1G	CA	4 Gallons	217.85	-
ATFTP	EA	(1) 2.5 Gallon	142.55	179.05
ATFTP	CA	(2) 2.5 Gallons	270.20	339.40

● Fuel-Efficient³⁷

Provides the same benefits as AMSOIL Multi-Vehicle Synthetic Automatic Transmission Fluid in a fuel-efficient formulation engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 - BMW 83 22 0 142 516, 83 22 2 152 426 - Chrysler Mopar 68157995AA, SP-IV, 68218925AB - DSIH 6p805 - Ford MERCON LV, SP-ULV - GM DEXRON HP VI, ULV - Honda/Acura DW-1, Type 3.0 - Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M - JASO 1A-LV - JWS 3324 - Mercedes Benz 236.12, 236.14, 236.15, 236.41 - Mitsubishi SP-IV, ATF J3, ATF-PA - Nissan Matic-S, Matic-W - Saab 93 165 147 - Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 - Toyota WS - Volvo 31256774 - VW/Audi G 055 005, G 055 162, G 060 162 - ZF S671 090 255

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATLQT	EA	1 Quart	14.59	19.19
ATLQT	CA	12 Quarts	165.45	217.80
ATLPK	EA	1 Quart Easy-Pack	16.29	21.39
ATLPK	CA	12 Quart Easy-Packs	184.45	243.10
ATL1G	EA	1 Gallon	57.59	-
ATL1G	CA	4 Gallons	218.05	-
ATLTP	EA	(1) 2.5 Gallon	142.70	184.80
ATLTP	CA	(2) 2.5 Gallons	270.45	350.30

OE Synthetic ATF

Resists wear and provides smooth shifts in passenger-car/light-truck automatic transmissions.

● Multi-Vehicle¹³

Use in applications that require Allison C-4, TES-389 - BMW 7045E, 8072B, LA 2634, LT 71141 - Chrysler ATF+4¹, Mopar ASRC, 68089195AA, 68049954AA - Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 - GM DEXRON II, DEXRON III, AutoTrak II - Honda/Acura ATF-Z1 - Hyundai/Kia SP-II, SP-III, Red-1 - IDEMITSU K17 - JASO 1A - JWS 3309, 3314, 3317 - MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339F - Mazda ATF-M III, ATF-MV, F-1 - Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 - Mitsubishi SP-II, SP-III, ATF-J2 - Nissan Matic-D, Matic-J, Matic-K, 402 - Saab 3309 - Shell 3403, LA 2634 - Subaru ATF, ATF-HP - Suzuki 3314, 3317 - Texaco ETL-7045E, ETL-8072B, N402 - Toyota Type T, T-II, T-III, T-IV - Voith 55.6335, 55.6336 - Volvo 97340, 97341 - VW/Audi G 052 162, G 052 990, G 055 025 - ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 16L, 17C, 20B, 21L

¹AMSOIL warrants the use of this product for Chrysler ATF+4 applications above -38°F. Product does not meet the cold temperature requirement of ATF+4 at -40°F. For warranty information, visit www.amsoil.com/warranty.aspx.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OTFQT	EA	1 Quart	9.39	12.49
OTFQT	CA	12 Quarts	106.75	141.80
OTF1G	EA	1 Gallon	37.09	-
OTF1G	CA	4 Gallons	140.65	-
OTFTP	EA	(1) 2.5 Gallon	91.65	119.60
OTFTP	CA	(2) 2.5 Gallons	173.70	226.65

● Fuel-Efficient¹³

Provides the same benefits as AMSOIL OE Multi-Vehicle Synthetic Automatic Transmission Fluid in a fuel-efficient formulation engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 - BMW 83 22 0 142 516, 83 22 2 152 426 - Chrysler Mopar 68157995AA, SP-IV, 68218925AB - DSIH 6p805 - Ford MERCON LV - GM DEXRON VI - Honda/Acura DW-1, Type 3.0 - Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M - JASO 1A-LV - JWS 3324 - Mercedes Benz 236.12, 236.14, 236.15, 236.41 - Mitsubishi SP-IV, ATF J3, ATF-PA - Nissan Matic-S, Matic-W - Saab 93 165 147 - Shell M-1375.4, M-1375.5, M-1375.6, M-L12108 - Toyota WS - Volvo 31256774 - VW/Audi G 055 005, G 055 162, G 060 162 - ZF S671 090 255

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OTLQT	EA	1 Quart	9.39	12.59
OTLQT	CA	12 Quarts	106.90	142.45
OTL1G	EA	1 Gallon	37.19	-
OTL1G	CA	4 Gallons	140.85	-
OTLTP	EA	(1) 2.5 Gallon	91.75	120.65
OTLTP	CA	(2) 2.5 Gallons	173.90	228.65

^{37,13}See page 47 for Proposition 65 information for this product.

“Changed out the transmission fluid in my GMC* 2500 with the AMSOIL OE. The difference is noticeable with how smooth the truck shifts. Great product.”

— Jimmy
Upstate NY



○ Synthetic CVT Fluid

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

Use in belt- and chain-type CVTs that require BMW EZL 799A (8322 0 136 376 /8322 0 429 154) • Daihatsu Amix CVTF-DG, CVTF-DFE • FCA Mopar CVTF +4 (Mopar CVT 4) • Ford M2C928-A (CFT 23), WSS-M2C933-A (CFT 30), Motorcraft XT-7-OCFT, MERCON C • GM DEX-CVT, GM CVT (CVTF I-Green2) • Honda HMMF (08200-9006), HCF-2 • Hyundai/Kia SP-CVT 1 • Mazda CVTF 3320 • Mercedes Benz 236.20 (001 989 46 03) • Mitsubishi CVTF-J1, CVTF-J4 • Nissan NS-1, NS-2, NS-3 • Subaru e-CVT, i-CVT F, Lineartronic CV-30, Lineartronic CVTF/CVT-II (K0425Y0710), High Torque CVTF • Suzuki CVT Fluid Green 1, CVT Fluid Green 2 (NS-2), CVTF 3320 (TC) • Toyota/Lexus TC, FE • VW/Audi TL 52180 (G 052 180), TL 52516 (G 052 516)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
CVTQT	EA	1 Quart	13.39	17.59
CVTQT	CA	12 Quarts	151.45	200.05
CVT1G	EA	1 Gallon	52.59	-
CVT1G	CA	4 Gallons	199.35	-

● 100% Synthetic DCT Fluid

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.

Use in applications that require BMW 83 22 2 148 477, DCTF-1, MTF-LT-5 • Chrysler 68044345 • Citroen/Peugeot 9734.S2 • Ferrari/Shell TF DCTF-3 • Fiat BOT 341 • Ford WSS-M2C936-A, WSS-M2C200-D2, XT-11-GDC • Mercedes Benz 236.21, 236.25 • Mitsubishi Dia-Queen SSTF-I • Nissan GT-R Transmission Oil R35 Special • Pentosin FFL-2, FFL-3, FFL-4 • Porsche 999.917.080.00, 043 207 29, 043 207 30, 000 430 20 • Renault BOT 450 • Volvo 1161838, 1161839 • VW/Audi G 052 182, G 052 529, TL 521 82

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DCTQT	EA	1 Quart	20.79	27.79
DCTQT	CA	12 Quarts	236.30	315.90

○ Synthetic Manual Transmission and Transaxle Gear Lube¹⁵

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

Use in applications that require API GL-4 • ZF TE-ML 02B, 17A, MB 235.5 & MAN 341-Z2 (formerly MAN 341 ML) • Synchronized manual transmissions and transaxles that require 75W-85, 75W-90 or 80W-90 API GL-4 Gear Lube • NV 4500 Transmissions • GM Part #12346190 • Chrysler Part #4874459 • Chrysler Spec MS-9070 • Certain Hyundai, Hino, Infiniti, Kia, Lexus, Mazda, Mitsubishi, Nissan, Suzuki, Toyota & Volkswagen models requiring GL-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MTGQT	EA	1 Quart	17.49	22.39
MTGQT	CA	12 Quarts	198.45	254.50
MTGPK	EA	1 Quart Easy-Pack	19.09	24.49
MTGPK	CA	12 Quart Easy-Packs	217.10	278.55

● Synthetic Synchronesh Transmission Fluid

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers.

Use in applications that require New Venture NV T350, NV1500, NV2500, NV3500, NV3550 & NV5600 • Tremec T4, T5, T18, T56, T176, TK0500, TK0600, TR3550 (GM Vehicles) & TR3450 • Honda Genuine MTF • GM Part #12345349, #12345577, #12377919 & #1052931 • Chrysler Part #4874464 & #4874465 • GM Specs #9985648, #9986105 & #9985535 • Chrysler Specs MS-9224 & MS-9417 • MTF-94 & Texaco MTX Fluids

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MTFQT	EA	1 Quart	15.79	20.29
MTFQT	CA	12 Quarts	178.65	229.80

○ Super Shift[®] Synthetic Racing Transmission Fluid¹⁷

Formulated to prevent slippage and reduce heat in high-performance, high-horsepower vehicles.

Use in transmissions that require Allison C-4 • Ford Type F

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ARTQT	EA	1 Quart	13.89	17.69
ARTQT	CA	12 Quarts	157.40	200.70

● Torque-Drive[®] Synthetic Heavy-Duty ATF¹⁷

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Use in transmissions that require Allison C-4, TES-295, TES-389; Ford MERCON® V; GM DEXRON® III; Isuzu SCS; MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F; MB 236.91, 236.10; Voith 55.6335, 55.6336; Volvo 97340, 97341; ZF TE-ML 03D, TE-ML 04D, TE-ML 14A, TE-ML 14B, TE-ML 14C, TE-ML 17C, TE-ML 20B, TE-ML 20C

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATD1G	EA	1 Gallon	56.69	74.29
ATD1G	CA	4 Gallons	214.90	281.50
ATDTP	EA	(1) 2.5 Gallon	140.65	-
ATDTP	CA	(2) 2.5 Gallons	266.55	-

● Synthetic Tractor Hydraulic/Transmission Oil¹³

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.

Use in hydraulic systems that require SAE 5W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATHQT	EA	1 Quart	11.39	14.49
ATHQT	CA	12 Quarts	129.50	164.60

^{15,17,13} See page 47 for Proposition 65 information for this product.

Synthetic Gear Lube



“Whoever invented the easy-pack concept is a genius. Especially for servicing transfer cases and differentials. It lives up to its name. Not only an innovative oil, but innovative packaging as well.”

– **Joey**
Calif.



SEVERE GEAR® Synthetic Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing. Flexible easy-pack helps you access tough-to-reach fill holes and eliminates the need for a pump.

● 75W-90

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVGQT	EA	1 Quart	17.29	21.99
SVGQT	CA	12 Quarts	196.45	250.05
SVGPK	EA	(1) Quart Easy-Pack	17.29	21.99
SVGPK	CA	(12) Quart Easy-Packs	196.45	250.05

○ 80W-90¹³

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AGLQT	EA	1 Quart	13.09	16.59
AGLQT	CA	12 Quarts	148.20	188.65
AGLPK	EA	1 Quart Easy-Pack	14.69	18.69
AGLPK	CA	12 Quart Easy-Packs	166.65	212.10

● 75W-110

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVTQT	EA	1 Quart	17.49	22.29
SVTQT	CA	12 Quarts	198.30	253.20
SVTPK	EA	1 Quart Easy-Pack	19.19	24.49
SVTPK	CA	12 Quart Easy-Packs	217.85	278.55

● 75W-140

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVOQT	EA	1 Quart	18.99	24.79
SVOQT	CA	12 Quarts	216.00	281.70
SVOPK	EA	(1) Quart Easy-Pack	18.99	24.79
SVOPK	CA	(12) Quart Easy-Packs	216.00	281.70

● Slip Lock® Differential Additive²¹

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

Note: AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADATB	EA	(1) 4-oz. Tube	8.69	11.49
ADATB	CA	(12) 4-oz. Tubes	98.00	129.80

SEVERE GEAR® EP Synthetic Racing Gear Lube

Engineered specifically for the demands of severe racing conditions, including off-road truck racing, rock racing, rock crawling, tractor pulling, funny car racing and dragster racing applications.

● SAE 250²⁸

Use in differentials that require API GL-5/MT-1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SRTQT	EA	1 Quart	18.19	23.29
SRTQT	CA	12 Quarts	206.05	264.60

Long Life Synthetic Gear Lube

Specifically engineered for extended drain intervals up to 500,000 miles (804,672 km) as set by equipment manufacturers for over-the-road trucks and heavy equipment.


● 75W-90¹³

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 256 (Eaton PS-163)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FGRQT	EA	1 Quart	14.99	18.49
FGRQT	CA	12 Quarts	170.45	210.20
FGR1G	EA	1 Gallon	59.39	-
FGR1G	CA	4 Gallons	225.15	-

Easy Installation

PRODUCT	STOCK#	U.S. P.C.	CAN. P.C.
Hand Pump	G2039	10.50	13.65
Flexible Pour Spout	G1230	0.80	1.05
Nozzle Dispenser Caps (6)	G1242	1.05	1.60
FloTool Flexible Pour Spout	G3721	4.20	5.65

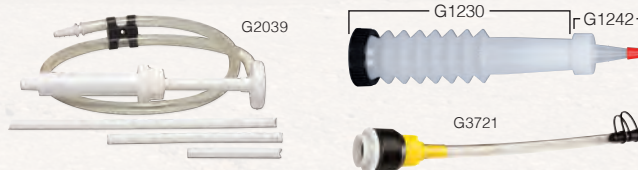

^{13,21,28} See page 47 for Proposition 65 information for this product.



Gasoline Stabilizer¹³

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASTCN	EA	(1) 16-oz. Bottle	11.69	15.49
ASTCN	CA	(6) 16-oz. Bottles	66.30	87.70

AMSOIL Fights Corrosion

AMSOIL Gasoline Stabilizer provides corrosion protection Sea Foam[®] Motor Treatment can't match, helping maintain power and performance and keeping metal looking like new even when subjected to salt water.*



Sea Foam



AMSOIL

*Based upon independent testing of AMSOIL Gasoline Stabilizer obtained Nov. 8, 2018 and Sea Foam Motor Treatment purchased Oct. 25, 2018 in a modified NACE TM0172 using synthetic sea water per ASTM D665 part B.

Upper Cylinder Lubricant¹³

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
UCLCN	EA	(1) 6-oz. Bottle	4.49	6.09
UCLCN	CA	(12) 6-oz. Bottles	50.45	69.00

P.i.[®] Performance Improver¹³

Concentrated detergent aggressively cleans stubborn, power-robbing deposits from injectors, valves and the combustion chamber in passenger cars and light trucks. Bottle compatible with capless fuel systems.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
APICN	EA	(1) 12-oz. Bottle	12.99	16.69
APICN	CA	(12) 12-oz. Bottles	147.75	189.30

¹³See page 47 for Proposition 65 information for this product.



Quickshot®

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AQSCN	EA	(1) 8-oz. Bottle	9.19	12.19
AQSCN	CA	(6) 8-oz. Bottles	52.20	69.00

DOMINATOR® Octane Boost²¹

Improves the performance of all two- and four-stroke gasoline-fueled engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AOBBE	EA	(1) 12-oz. Bottle	9.89	12.89
AOBBE	CA	(6) 12-oz. Bottles	55.75	72.80

Diesel Recovery²¹

Emergency diesel fuel treatment that liquefies gelled diesel fuel and thaws frozen fuel filters. Keep a bottle on hand for emergencies.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DRCQT	EA	(1) 30-oz. Bottle	12.39	16.39
DRCQT	CA	(12) 30-oz. Bottles	140.85	185.50

Diesel All-In-One²⁵

Combines the superior deposit-removing properties of Diesel Injector Clean, the excellent anti-gelling properties of Diesel Cold Flow and the cetane-boosting benefits of Diesel Cetane Boost in one convenient package.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADBPCN	EA	(1) 8-oz. Bottle	5.99	--
ADBPCN	CA	(6) 8-oz. Bottles	33.85	--
ADBCN	EA	(1) 16-oz. Bottle	10.59	14.19
ADBCN	CA	(12) 16-oz. Bottles	119.95	161.45
ADBHG	EA	(1) 64-oz. Bottle	37.59	--
ADBHG	CA	(6) 64-oz. Bottles	213.40	--

Superior Cold-Temperature Protection

AMSOIL Diesel All-In-One provides as much as **32°F (18°C) better protection** against cold-temperature gelling than Howes* Lubricator Diesel Treat.[™] Plus raises cetane up to 4 points.

²¹Based on independent testing in July 2017 of AMSOIL Diesel All-In-One and Howes Lubricator Diesel Treat using diesel fuel representative of the U.S. marketplace and Howes' recommended treat ratio for above 0°F (-17.8°C).



Diesel Cold Flow¹⁷

Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point and improve cold-flow filtration properties. Lowers cold filter-plugging point (CFPP) by up to 40°F (22°C) in ultra-low-sulfur diesel (ULSD).

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ADDCN	EA	(1) 16-oz. Bottle	8.89
ADDCN	CA	(12) 16-oz. Bottles	100.75

Diesel Cetane Boost

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. Diesel engines operate best on fuel with cetane values of 50 or higher. Most diesel fuel sold in North America has a cetane value of 40-45.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ACBCN	EA	(1) 16-oz. Bottle	9.29	12.49
ACBCN	CA	(12) 16-oz. Bottles	105.65	141.80
ACBHG	EA	(1) 64-oz. Bottle	31.59	--
ACBHG	CA	(6) 64-oz. Bottles	179.60	--

Diesel Injector Clean¹⁹

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADFPNC	EA	(1) 8-oz. Bottle	4.79	--
ADFPNC	CA	(6) 8-oz. Bottles	26.90	--
ADFCN	EA	(1) 16-oz. Bottle	8.29	11.19
ADFCN	CA	(12) 16-oz. Bottles	93.70	126.60
ADFHG	EA	(1) 64-oz. Bottle	28.39	--
ADFHG	CA	(6) 64-oz. Bottles	160.95	--

Diesel Injector Clean + Cetane Boost²¹

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADSPCN	EA	(1) 8-oz. Bottle	5.09	--
ADSPCN	CA	(6) 8-oz. Bottles	28.75	--
ADSCN	EA	(1) 16-oz. Bottle	12.49	16.59
ADSCN	CA	(12) 16-oz. Bottles	141.30	188.05
ADSHG	EA	(1) 64-oz. Bottle	42.09	--
ADSHG	CA	(6) 64-oz. Bottles	239.40	--

^{21,25,17,19}See page 47 for Proposition 65 information for this product.

Extended Filter Life

- AMSOIL Oil Filters designated with product code EA15K are recommended for 15,000 miles (24,100 km) or one year, whichever comes first, in normal or severe service. NOTE: Change oil filter at every oil change.
- AMSOIL Oil Filters designated with product code EAO are recommended for 25,000 miles (40,200 km) or one year, whichever comes first, in normal service or 15,000 miles (24,100 km) or one year, whichever comes first, in severe service. NOTE: Change oil filter at every oil change.
- When AMSOIL Oil Filters are used with a motor oil other than AMSOIL motor oil, the filter should be changed according to the vehicle manufacturer's recommendation.

Oil Filters

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear. Easy-grip coating eases the job of tightening and loosening filters. Call 1-800-777-7094 (Monday-Friday, 7 a.m.- 7 p.m. Central Time) or look up your vehicle at AMSOIL.com to determine the appropriate filter for each application. NOTE: Change oil filter at every oil change.



Oil Filters

STOCK#	UNITS	U.S. P.C.	CAN. P.C.	STOCK#	UNITS	U.S. P.C.	CAN. P.C.
EA15K01	EA	20.65	27.45	EA15K32	EA	18.20	24.15
EA15K02	EA	20.95	27.80	EA034	EA	19.00	25.20
EA15K03	EA	19.30	25.60	EA15K35	EA	18.20	24.10
EA15K04	EA	20.05	26.60	EA15K37	EA	15.75	20.90
EA15K05	EA	19.45	25.75	EA15K38	EA	16.05	21.30
EA15K06	EA	16.95	22.50	EA15K39	EA	24.35	32.30
EA15K07	EA	14.50	19.25	EA042	EA	18.50	24.55
EA15K08	EA	21.30	28.20	EA15K43	EA	20.65	27.45
EA15K09	EA	19.25	25.55	EA15K49	EA	27.75	36.85
EA011	EA	17.90	23.75	EA15K50	EA	16.90	22.45
EA15K12	EA	17.40	23.05	EA15K51	EA	17.40	23.05
EA15K13	EA	18.25	24.25	EA052	EA	19.25	25.55
EA015	EA	19.10	25.40	EA15K53	EA	17.90	23.75
EA15K16	EA	18.20	24.10	EA15K54	EA	23.45	31.10
EA017	EA	17.60	23.35	EA055	EA	30.80	40.85
EA15K19	EA	18.20	24.15	EA059	EA	18.70	24.80
EA15K20	EA	19.10	25.40	EA064	EA	17.75	23.60
EA023	EA	17.90	23.75	EA080	EA	20.50	27.20
EA024	EA	19.30	25.65	EA15K88	EA	37.60	49.90
EA026	EA	20.95	27.85	EA098	EA	33.30	44.20
EA15K28	EA	19.10	25.40	EA099	EA	34.50	45.80
EA15K29	EA	18.50	24.55				

EAHD



Heavy-Duty Extended-Life Oil Filters

Provide excellent 99 percent filtering efficiency at 20 microns and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic engine oils.

See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

EABP



Bypass Filters

High-efficiency bypass filters effectively remove minute dirt particles and soot by working in conjunction with the engine's full-flow filter and capturing contaminants that full-flow filter can't remove.

See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

Grease



Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

● Synthetic Polymeric Off-Road Grease³⁶

Use in applications that require NLGI No. 1, 5% Moly

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPOR1CR	EA	(1) 15-oz. Cartridge	10.59	13.69
GPOR1CR	CA	(10) 15-oz. Cartridges	104.50	135.60

● Synthetic Polymeric Off-Road Grease³⁶

Use in applications that require NLGI No. 2, 5% Moly

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPOR2CR	EA	(1) 15-oz. Cartridge	11.09	14.49
GPOR2CR	CA	(10) 15-oz. Cartridges	109.20	140.85

Synthetic Polymeric Truck, Chassis/Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

● Synthetic Polymeric Truck, Chassis/Equipment Grease³⁵

Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPTR1CR	EA	(1) 14-oz. Cartridge	8.99	11.99
GPTR1CR	CA	(10) 14-oz. Cartridges	89.10	118.70

● Synthetic Polymeric Truck, Chassis/Equipment Grease³⁵

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPTR2CR	EA	(1) 14-oz. Cartridge	9.69	12.89
GPTR2CR	CA	(10) 14-oz. Cartridges	95.75	127.15

DOMINATOR® Synthetic Racing Grease

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track. Designed for bearings that operate under high-speed, high-heat and low-temperature conditions.

Use in applications that require NLGI No. 2, GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GRGCR	EA	(1) 14-oz. Cartridge	13.79	17.39
GRGCR	CA	(10) 14-oz. Cartridges	134.60	169.35

Synthetic Multi-Purpose Grease

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

Use in applications that require NLGI No. 2 • GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GLCCR	EA	(1) 14-oz. Cartridge	8.69	11.49
GLCCR	CA	(10) 14-oz. Cartridges	84.05	111.35

Synthetic Water-Resistant Grease

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

Use in applications that require NLGI No. 2 • GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GWRCR	EA	(1) 14-oz. Cartridge	8.89	11.69
GWRCR	CA	(10) 14-oz. Cartridges	85.30	112.90

Spray Grease

Applies quickly and evenly and is ideal for greasing hard-to-reach equipment, including hinges, springs, industrial chains, latches, slides, winches and other common applications.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
GSPSC	EA	(1) 10-oz. Spray Can	9.29
GSPSC	CA	(12) 10-oz. Spray Cans	104.90

^{36,35}See page 47 for Proposition 65 information for this product.

Synthetic ATV/UTV Oil



Formulated to deliver premium protection and performance for hard-working and performance ATVs and UTVs.



Synthetic ATV/UTV Motor Oil

Formulated to provide upgraded performance and protection for hard-working and performance ATVs and UTVs.

● 10W-30¹³

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV30QT	EA	1 Quart	11.19	—
AUV30QT	CA	12 Quarts	126.45	—

● 5W-40¹³

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV54QT	EA	1 Quart	12.29	16.19
AUV54QT	CA	12 Quarts	139.15	184.20

● 10W-40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV40QT	EA	1 Quart	12.29	16.19
AUV40QT	CA	12 Quarts	139.45	184.25

● 5W-50

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV50QT	EA	1 Quart	12.59	16.09
AUV50QT	CA	12 Quarts	142.25	182.35



See p. 41 for Synthetic Chaincase & Gear Oil.

^{13,18}See page 47 for Proposition 65 information for this product.



● Synthetic ATV/UTV Transmission & Differential Fluid¹⁸

Use in ATV and UTV transmissions and differentials, including those made by Polaris*, Honda*, Yamaha*, Kawasaki*, Can Am* and Suzuki*.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUDTQT	EA	1 Quart	13.99	18.09
AUDTQT	CA	12 Quarts	159.05	205.75
AUDTPK	EA	1 Quart Easy-Pack	15.69	20.39
AUDTPK	CA	12 Quart Easy-Packs	178.45	231.05

● Synthetic ATV/UTV Powertrain Fluid¹³

Purpose-built for transmission/differentials and front drives in Polaris* ATVs and UTVs, offering the perfect combination of protection and convenience.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUPTPK	EA	1 Quart Easy-Pack	14.39	18.99
AUPTPK	CA	12 Quart Easy-Packs	163.55	215.90

ATV/UTV Oil Change Kits for Polaris* Vehicles

FITMENT INFO:

PK1: ACE* 900, GENERAL* 1000, 2013+ RANGER* 900 & 1000, 2013+ RZR* 900 & 1000

PK2: ATP* 330, 500, Hawkeye* 300, 400, Magnum* 325, 330, 500, RANGER* 400, Model years 2016 and previous - RANGER* 500, Scrambler* 500, 850, 1000, Sportsman* 300, 400, 450, 500, 550, 570, 850, 1000, Trail Blazer* 330, Trail Boss* 325, 330, Xplorer* 500

PK3: ACE* 500, 570, 2017+ RANGER* 500, RANGER* 570, 700, 800, RZR* 570, 800, Sportsman* 600, 700, 800

Contains everything needed to perform an oil change on most Polaris UTVs and ATVs using AMSOIL Synthetic 5W-50 ATV/UTV Motor Oil. See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PK1	EA	1 kit	39.60	52.70
PK2	EA	1 kit	35.10	46.65
PK3	EA	1 kit	32.95	43.95

ATV/UTV Oil Change Kits for Can-Am* Vehicles

FITMENT INFO:

CK1: Maverick X3

CK2: Outlander 500-1000 • Renegade 500-1000 • Commander 800-1000 • Defender HD8 & HD10 • Maverick 800-1000 • Traxter HD8 & HD10

CK3: Defender HD5 • Outlander 400-450 • Traxter HD5

Contains everything needed to perform an oil change on most Can-Am UTVs and ATVs using AMSOIL Formula 4-Stroke® Powersports Synthetic Motor Oil. See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.


STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
CK1	EA	1 kit	62.45	83.05
CK2	EA	1 kit	48.40	64.60
CK3	EA	1 kit	60.55	80.55

Synthetic Motorcycle Oil



AMSOIL Resists Viscosity Breakdown

AMSOIL V-Twin Motorcycle Oil resists viscosity breakdown **6X better** than Harley-Davidson* SYN3* for **improved protection** against compensator and transmission gear wear.^{BB}

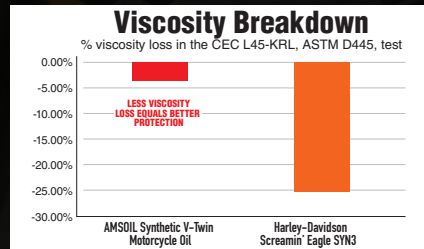

^{BB}Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



Synthetic V-Twin Motorcycle Oil

● 20W-50

Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson*, Buell* and other motorcycle engines, primaries and transmissions.

Use in bikes that require API SG, SL/CF, CG-4 • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCVQT	EA	1 Quart	12.89	16.99
MCV1G	CA	12 Quarts	146.25	192.45
MCV1G	EA	1 Gallon	50.79	66.69
MCV1G	CA	4 Gallons	192.50	252.60

● SAE 60

Superior synthetic formulation provides long service life and maximum protection against engine wear in big-bore, air-cooled motorcycle engines, including Harley-Davidson Panhead, Shovelhead and Knucklehead.

Use in bikes that require API SG, SL/CF, GL-1 • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCSQT	EA	1 Quart	14.29	18.39
MCSQT	CA	12 Quarts	162.55	208.30

● 20W-40

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian* and Victory* motorcycles.

Use in bikes that require API SM • JASO MA • ILSAC GF-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVIQT	EA	1 Quart	12.79	16.89
MVIQT	CA	12 Quarts	145.50	191.80

● 15W-60

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian and Victory motorcycles.

Use in bikes that require API SM • JASO MA • ILSAC GF-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MSVQT	EA	1 Quart	14.79	19.39
MSVQT	CA	12 Quarts	167.25	219.70

● Synthetic V-Twin Transmission Fluid

Helps quiet V-twin transmission noise and enable smooth shifts.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVTQT	EA	1 Quart	15.09	19.69
MVTQT	CA	12 Quarts	171.75	223.45

● Synthetic V-Twin Primary Fluid

Delivers consistent clutch feel and helps riders easily find neutral.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVPQT	EA	1 Quart	12.69	16.49
MVPQT	CA	12 Quarts	144.40	186.75

Motorcycle Octane Boost²¹

Increases octane up to three numbers for maximum power and efficiency in motorcycles.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MOBCN	EA	(1) 4-oz. Bottle	4.79	6.49
MOBCN	CA	(12) 4-oz. Bottles	54.15	73.45

V-Twin Oil Change Kits

FITMENT INFO:

HDCK, HDBK: most 1999-2016 Harley-Davidson* motorcycles (HDCK includes chrome filter; HDBK includes black filter).

HDMC, HDMB: most 2017-present Harley-Davidson motorcycles (HDMC includes chrome filter; HDMB includes black filter).

Contains everything needed to perform an oil change on most Harley-Davidson motorcycles, including 20W-50 Synthetic V-Twin Motorcycle Oil, AMSOIL Motorcycle Oil Filter and O-ring.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HDCK	EA	1 kit	68.85	91.05
HDBK	EA	1 kit	65.20	86.65
HDMC	EA	1 kit	81.15	107.70
HDMB	EA	1 kit	77.80	103.35

Synthetic Metric Motorcycle Oil

● 10W-40

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am*, Honda*, Yamaha*, Kawasaki*, Triumph*, Suzuki*, BMW* and other motorcycle engines.

Use in bikes that require API SM, SG, SL, CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCFQT	EA	1 Quart	12.89	16.89
MCFQT	CA	12 Quarts	145.70	191.20
MCF1G	EA	1 Gallon	50.59	65.69
MCF1G	CA	4 Gallons	191.70	248.80

● 10W-30

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda, Yamaha, Suzuki and Kawasaki motorcycles.

Use in bikes that require API SH, SG, CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCTQT	EA	1 Quart	13.09	17.39
MCTQT	CA	12 Quarts	148.45	196.90

● 15W-50

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Ducati*, BMW, KTM*, Yamaha, Triumph and Royal Enfield* motorcycles.

Use in bikes that require API SM • JASO MA/MA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MFFQT	EA	1 Quart	14.49	19.39
MFFQT	CA	12 Quarts	164.80	220.30

Motorcycle Oil Filters

Most efficient filters available for the motorcycle and powersports market. Provide excellent 99 percent filtering efficiency at 20 microns. Available in black or chrome (as available).

See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

²¹See page 47 for Proposition 65 information for this product.

Synthetic Dirt Bike Oil



DB40



DB50



DB60



DBTF



STL



STM

“Love AMSOIL products. Something I can count on always working even when racing is unpredictable.”

— CAJO
Alpine, Utah

Synthetic Dirt Bike Oil

Delivers confident clutch feel, maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.

10W-40

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB40QT	EA	1 Quart	12.69	16.69
DB40QT	CA	12 Quarts	143.60	189.30

10W-50

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB50QT	EA	1 Quart	14.19	18.69
DB50QT	CA	12 Quarts	161.15	212.70

10W-60

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB60QT	EA	1 Quart	14.69	19.39
DB60QT	CA	12 Quarts	167.00	219.70

Synthetic Dirt Bike Transmission Fluid

Use in two-stroke dirt bike transmissions and the Honda CRF

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DBTFQT	EA	1 Quart	11.29	15.09
DBTFQT	CA	12 Quarts	128.10	170.95

Shock Therapy® Suspension Fluid

Controls friction, heat, wear, foaming and scuffing in suspension components.

Shock Therapy Suspension Fluid¹³

Lightweight #5

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
STLQT	EA	1 Quart	15.09	19.49
STLQT	CA	12 Quarts	171.65	220.95


Shock Therapy Suspension Fluid¹³

Medium #10

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
STMQT	EA	1 Quart	15.19	19.59
STMQT	CA	12 Quarts	172.20	222.20

AMSOIL delivers confident clutch feel.

AMSOIL provides excellent clutch protection. How good is it? In extreme simulated-start testing, AMSOIL Dirt Bike Oil provided superior wear protection and kept clutch plates looking new.

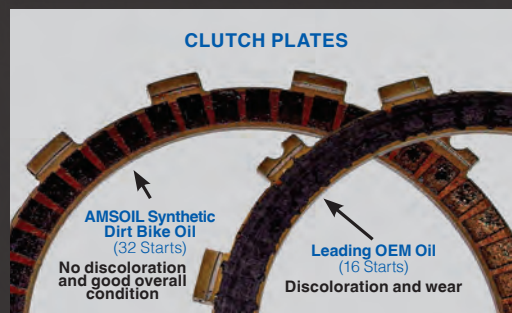

¹³Based on dyno testing of a Honda CRF450 dirt bike using AMSOIL 10W-40 Synthetic Dirt Bike Oil and a leading original equipment manufacturer 10W-40 conventional dirt bike oil.

¹³See page 47 for Proposition 65 information for this product.

Synthetic 4-Stroke Oil



● Formula 4-Stroke® Powersports Synthetic Motor Oil

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.

Use in ATVs and snowmobiles that require API SG, SJ, SL/CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFFQT	EA	1 Quart	13.29	17.49
AFFQT	CA	12 Quarts	150.80	198.80

Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

Use in equipment that requires API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2

○ 5W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AESQT	EA	1 Quart	9.49	12.49
AESQT	CA	12 Quarts	107.15	141.80

● 10W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASEQT	EA	1 Quart	9.49	12.49
ASEQT	CA	12 Quarts	107.15	141.80
ASE1G	EA	1 Gallon	37.09	—
ASE1G	CA	4 Gallons	140.35	—

● 10W-40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASFQT	EA	1 Quart	9.99	13.79
ASFQT	CA	12 Quarts	113.60	156.40
ASF1G	EA	1 Gallon	39.29	—
ASF1G	CA	4 Gallons	148.90	—

● 15W-50

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SEFQT	EA	1 Quart	8.99	11.79
SEFQT	CA	12 Quarts	101.30	133.60

● 20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid¹³

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

Use in hydrostatic transmissions that require 15W-50 or 20W-50 oil recommended for API SM, SL, SJ, SH or SG.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AHFQT	EA	1 Quart	11.99	16.39
AHFQT	CA	12 Quarts	135.45	185.50
AHF1G	EA	1 Gallon	46.99	—
AHF1G	CA	4 Gallons	178.10	—

● Formula 4-Stroke® Synthetic Scooter Oil¹³

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters.

Use in scooters that require API SG, SL/CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ASOQT	EA	1 Quart	10.89
ASOQT	CA	12 Quarts	123.55

● Semi-Synthetic Bar and Chain Oil¹⁷

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ABCQT	EA	1 Quart	6.59	8.69
ABCQT	CA	12 Quarts	74.10	98.75
ABC1G	EA	1 Gallon	25.59	—
ABC1G	CA	4 Gallons	96.70	—

Commercial-Grade Synthetic Oil for Small Engines

AMSOIL Synthetic Small-Engine Oil provides excellent all-season protection and performance in a large variety of small engines:

- Zero-Turn Mowers
- Riding and Push Lawnmowers
- Snowblowers
- Generators
- Pumps
- Welders
- Skid-Steers
- Compressors
- And More

^{13,17}See page 47 for Proposition 65 information for this product.

Synthetic 2-Stroke Oil



SABER Professional Fights Carbon

Equipment using SABER Professional was 96% carbon-free^N.



Leading OEM oil after 300 hours



AMSOIL SABER Professional after 300 hours

^NBased on spark-arrestor testing.



Runs On Freedom™ Limited Snowmobile Warranty

Use AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil exclusively in your current-model-year or newer sled and we'll cover engine repairs in the unlikely event of any engine breakdown for up to two years/5,000 miles/8,000 km.*

*To get details and register, visit AMSOIL.com/rofwarranty.



AIO



● Synthetic 2-Stroke Injector Oil¹³

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors. Ideal for vintage sleds.

Use in snowmobiles and boat motors that require TC-W3 • API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AIOQT	EA	1 Quart	9.79	12.89
AIOQT	CA	12 Quarts	110.65	146.25
AIO1G	EA	1 Gallon	38.49	49.89
AIO1G	CA	4 Gallons	145.85	189.10

AIT



● INTERCEPTOR® Synthetic 2-Stroke Oil¹³

Purpose-built, best-in-class performance for piston protection, cold-temperature pumpability and exhaust power valve cleanliness. Use in snowmobiles, including those made by Ski-Doo*, Polaris* and Arctic Cat*.

Use in snowmobiles that require API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AITQT	EA	1 Quart	12.39	16.39
AITQT	CA	12 Quarts	140.80	185.50
AIT1G	EA	1 Gallon	48.89	63.19
AIT1G	CA	4 Gallons	185.20	239.50

TDR



● DOMINATOR® Synthetic 2-Stroke Racing Oil¹³

Delivers outstanding wear protection in high-horsepower and modified racing applications, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.

Use in snowmobiles that require API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
TDRQT	EA	1 Quart	13.39	17.59
TDRQT	CA	12 Quarts	151.30	199.40
TDR1G	EA	1 Gallon	52.59	67.79
TDR1G	CA	4 Gallons	199.20	257.00

ATP



● SABER® Professional Synthetic 2-Stroke Oil¹³

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience.

Use in power equipment that requires ISO-L-EGD • API TC • JASO FD

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATPPK	EA	(1) 1.5-oz. Pillow Pack	1.39	-
ATPPK	CA	(48) 1.5-oz. Pillow Packs	59.95	-
ATPTS	EA	(1) 2.6-oz. Bottle	2.29	-
ATPTS	CA	(12) 2.6-oz. Bottles	25.20	-
ATPBA	EA	(1) 3.5-oz. Bottle	2.49	-
ATPBA	CA	(12) 3.5-oz. Bottles	27.85	-
ATPSF	EA	(1) 6.4-oz. Bottle	3.89	5.49
ATPSF	CA	(12) 6.4-oz. Bottles	44.35	61.45
ATPBC	EA	(1) 8-oz. Bottle	4.79	6.09
ATPBC	CA	(12) 8-oz. Bottles	54.35	68.40
ATPTE	EA	(1) 12.8-oz. Bottle	7.49	-
ATPTE	CA	(12) 12.8-oz. Bottles	84.80	-
ATPQT	EA	1 Quart	13.29	16.89
ATPQT	CA	12 Quarts	150.15	191.20
ATP1G	EA	1 Gallon	52.19	-
ATP1G	CA	4 Gallons	197.65	-

TCC



○ Synthetic Chaincase & Gear Oil

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
TCCCN	EA	(1) 16-oz. Bottle	10.59	13.89
TCCCN	CA	(6) 16-oz. Bottles	60.05	78.85

¹³See page 47 for Proposition 65 information for this product.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).



Synthetic Marine Oil



“Switched my marine big block over to AMSOIL 25W-40 and have seen better oil pressure and increased performance over 30W oil. I’ll definitely use this oil again.”

— **Runky**
Portsmouth, RI



Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications.

● 10W-30¹³

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-00833T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCTQT	EA	1 Quart	11.39	14.99
WCTQT	CA	12 Quarts	128.90	170.30

● 10W-40¹³

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-00850T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCFQT	EA	1 Quart	12.39	16.39
WCFQT	CA	12 Quarts	140.05	185.50

● 25W-40 (Synthetic Blend)²³

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-11825T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCMQT	EA	1 Quart	9.59	12.99
WCMQT	CA	12 Quarts	109.10	147.50

● HP Marine® Synthetic 2-Stroke Oil¹³

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

Use in boat motors that require TC-W3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HPMQT	EA	1 Quart	10.69	13.99
HPMQT	CA	12 Quarts	120.75	158.90
HPM1G	EA	1 Gallon	41.89	53.89
HPM1G	CA	4 Gallons	158.50	204.25

● Outboard 100:1 Pre-Mix Synthetic 2-Stroke Oil¹³

Contains a heavy dose of low-temperature dispersant additives that excel at reducing varnish and carbon deposit formation in water-cooled outboard motors.

Use in boat motors that require TC-W3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ATOBC	EA	(1) 8-oz. Bottle	5.09
ATOBC	CA	(12) 8-oz. Bottles	57.50
ATOQT	EA	1 Quart	14.79
ATOQT	CA	12 Quarts	168.05

● Universal Synthetic Marine Gear Lube¹⁸

Resists foam and retains extreme-pressure qualities in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions. Delivers advanced outboard protection against power loss and gear wear, even with up to 15 percent water contamination.^Y Choose the easy-pack for fast, easy installation.

Use in applications that require GL-5, GL-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AGMTB	EA	(1) 10-oz. Tube	7.39	9.69
AGMTB	CA	(6) 10-oz. Tubes	41.55	54.80
AGMQT	EA	1 Quart	13.39	17.69
AGMQT	CA	12 Quarts	152.40	201.30
AGMPK	EA	1 Quart Easy-Pack	15.09	19.99
AGMPK	CA	12 Quart Easy-Packs	171.65	226.65

Marine Gear Lube Pump²⁷

Specifically designed to ease installation and reduce mess when servicing lower units. Eliminate the need for a pump, save money and reduce the mess by choosing the easy-pack.

STOCK#	U.S. P.C.	CAN. P.C.
G3456	10.10	13.40

^{13,23,18,27}See page 47 for Proposition 65 information for this product.
^YBased upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D892.

Cleaners and Protectants



Chain Lube

Provides outstanding protection against wear and corrosion. Helps extend chain life. Does not attract dirt and does not fling off. Fast-drying.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ACL4SC	EA	(1) 4.5-oz. Spray Can	6.29
ACL4SC	CA	(12) 4.5-oz. Spray Cans	71.35
ACLSC	EA	(1) 11-oz. Spray Can	11.89
ACLSC	CA	(6) 11-oz. Spray Cans	67.30

Engine Fogging Oil

Helps prevent corrosion and dry starts to internal engine components found in outboard motors, lawn and garden equipment, motorcycles, snowmobiles, ATVs, motor homes and generators during storage or long periods of inactivity.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
FOGSC	EA	(1) 12-oz. Aerosol Can	9.69
FOGSC	CA	(6) 12-oz. Aerosol Cans	54.85

Power Foam®

Improves starting and performance by cleaning dirty intake systems and spark plugs; freeing sticky valves and removing gum, varnish and carbon deposits.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
APFSC	EA	(1) 18-oz. Spray Can	9.79
APFSC	CA	(12) 18-oz. Spray Cans	111.45

Heavy-Duty Degreaser

Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete and other surfaces.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ADGSC	EA	(1) 15-oz. Spray Can	12.69
ADGSC	CA	(12) 15-oz. Spray Cans	144.35

Silicone Spray²⁶

Perfect for lubricating or protecting rubber, nylon, plastics, upholstery, vinyl, wood, cardboard or fiberglass. Also excellent for waterproofing leather products. Hundreds of household uses.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ALSSP	EA	(1) 10-oz. Spray Can	9.19
ALSSP	CA	(12) 10-oz. Spray Cans	104.00

²⁶See page 47 for Proposition 65 information for this product.



Protection and Dependability
for Generations



Mudslinger®

Provides a protective layer of armor against the accumulation of mud, dirt and snow on ATVs, UTVs and dirt bikes, easing clean-up. Restores color and luster.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMSSC	EA	(1) 12-oz. Spray Can	9.89
AMSSC	CA	(12) 12-oz. Spray Cans	111.50

Engine Degreaser

Effectively cleans engine surfaces by cutting through grease, oil and grime.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AEDSC	EA	(1) 15-oz. Spray Can	8.19
AEDSC	CA	(12) 15-oz. Spray Cans	92.75

Glass Cleaner

Cuts through grease and grime faster than other leading glass cleaners, stays where you spray it and leaves no streaks.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AGCSC	EA	(1) 19-oz. Spray Can	4.69
AGCSC	CA	(12) 19-oz. Spray Cans	52.40

Metal Protector¹³

Displaces water, lubricates, penetrates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMP4SC	EA	(1) 4-oz. Spray Can	6.29	—
AMP4SC	CA	(12) 4-oz. Spray Cans	71.15	—
AMPSC	EA	(1) 8.75-oz. Spray Can	8.19	8.49
AMPSC	CA	(12) 8.75-oz. Spray Cans	92.75	95.60

Heavy-Duty Metal Protector¹³

Penetrates and adheres to metal surfaces, leaving a long-lasting coating that protects against the damaging effects of salt, moisture or chemical corrosion.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMHSC	EA	(1) 15-oz. Spray Can	11.69
AMHSC	CA	(12) 15-oz. Spray Cans	132.65

¹³See page 47 for Proposition 65 information for this product.

Engine and Transmission Flush

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FLSHCN	EA	(1) 16-oz. Bottle	11.29	14.69
FLSHCN	CA	(12) 16-oz. Bottles	128.05	167.15

Miracle Wash® Waterless Wash & Wax

Unique dry car wash and polish delivers outstanding performance and quick, easy and economical spray application. No water required.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMWSC	EA	(1) 13-oz. Spray Can	10.29
AMWSC	CA	(12) 13-oz. Spray Cans	116.20

Synthetic Firearm Lubricant and Protectant

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FLPBA	EA	(1) 4-oz. Bottle	8.99	12.09
FLPBA	CA	(12) 4-oz. Bottles	101.75	137.40
FLPSC	EA	(1) 5-oz. Spray Can	11.09	—
FLPSC	CA	(12) 5-oz. Spray Cans	125.55	—

Firearm Cleaner and Protectant

Penetrates deep into hard-to-reach components, effectively cleaning fouling and powder residue from all firearm surfaces, safely protecting them for storage, reducing jamming and increasing reliability. Protects against corrosion, allowing for safe storage and preserving performance, reliability and value.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
FCPSC	EA	(1) 5-oz. Spray Can	7.59
FCPSC	CA	(12) 5-oz. Spray Cans	86.35
FCPCN	EA	(1) 8-oz. Bottle	10.19
FCPCN	CA	(12) 8-oz. Bottles	114.95



● Heavy-Duty Antifreeze & Coolant²⁹

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,000,000 miles, 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.

Use in applications requiring any of the following specifications:

ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A
Suitable for use with the following: Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth R026-170-97 • Mack 0146GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ANTHD1G	EA	1 Gallon	20.59
ANTHD1G	CA	4 Gallons	77.90

○ Propylene Glycol Antifreeze & Coolant

Combines the benefits of biodegradability, low toxicity and all-climate protection for up to 150,000 miles (241,400 km) or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,000,000 miles (1,609,344 km), 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.

Use in applications requiring any of the following specifications:

ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A
Suitable for use with the following: Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth R026-170-97 • Mack 0146GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ANT1G	EA	1 Gallon	44.99	59.09
ANT1G	CA	4 Gallons	170.50	223.90

● Passenger Car/Light Truck Antifreeze & Coolant²⁹

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 150,000 miles or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ANTPC1G	EA	1 Gallon	19.29
ANTPC1G	CA	4 Gallons	73.05

Fluid Extraction Pump

STOCK#	U.S. P.C.	CAN. P.C.
G2576	15.75	21.00

Aids in the removal of old fluids when servicing vehicles.



²⁹ See page 47 for Proposition 65 information for this product.

● Powersports Antifreeze & Coolant¹⁵

Advanced design helps control operating temperature in hot-running, high-revving powersports applications. Extended-life formula provides all-season protection for up to five years.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PSAFQT	EA	1 Quart	7.59	10.19
PSAFQT	CA	12 Quarts	85.50	115.25

DOMINATOR® Coolant Boost

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles.

Warm up your car 54% faster. See the Coolant Boost product page at AMSOIL.com for details.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RDCBCN	EA	(1) 16-oz. Bottle	11.49	15.49
RDCBCN	CA	(6) 16-oz. Bottles	65.00	87.70

○ Synthetic Air Tool Oil

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AIRBA	EA	(1) 4-oz. Bottle	3.99	5.49
AIRBA	CA	(12) 4-oz. Bottles	45.45	62.05

● Multi-Vehicle Synthetic Power Steering Fluid¹³

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

Use in applications that require American Motor Corporation C 4124; 4634 • BMW 82 11 0 148 132; 83 29 0 429 576; 81 22 1 468 879 & 82 11 1 468 041 • Chrysler MS-1872; MS-5931; MS-9602 & MS-11655 • Ford M2C138-CJ; ESW-M2C128-C&D; M2C195-A; M2C204-A & M2C33-F • GM/Saginaw PSF 9985010; 9985835; 89021184 & 1050017 • Hyundai/Kia PSF-3; PSF-4 & PSF 00232-19017 • Mercedes Benz 236.3; 345.0; 001 989 24 03 10; 001 989 24 03 12 & Q 1 32 0001 • Mitsubishi Diamond SP III & PS Fluid • Navistar TMS 6810 • Nissan PSF-II • Porsche 000 043 206 56 • Saab 93160548; (45) 30 09 800 & 30 32 380 • Subaru K0209A0080 • Toyota PSF Type EH; P/N 008886-01 • Volvo 1161529 & 30741424 • VW/Audi TL-52146; G002000; G 004 000 M2; G 004 000 M7 & G 004 000 M8

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PSFCN	EA	(1) 16-oz. Bottle	8.39	10.79
PSFCN	CA	(12) 16-oz. Bottles	94.70	122.20



DOT 3 & 4 Synthetic Brake Fluid³³

High-performance brake fluid specially designed as a multi-use product for passenger-car, light-truck and powersports applications.

Use in equipment requiring a DOT 3, 4 or 5.1 brake fluid.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BFLVCN	EA	(1) 12-oz. Bottle	6.69
BFLVCN	CA	(12) 12-oz. Bottles	75.95

DOMINATOR® DOT 4 Synthetic Racing Brake Fluid¹⁰

High boiling point brake fluid engineered to resist brake fade and vapor lock during intense racing applications.

Use in racing equipment requiring a DOT 4 brake fluid.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BFRCN	EA	(1) 12-oz. Bottle	12.49
BFRCN	CA	(12) 12-oz. Bottles	141.25

Brake & Parts Cleaner³²

Professional-strength parts cleaner that quickly removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BPCSC	EA	(1) 19-oz. Spray Can	6.09
BPCSC	CA	(12) 19-oz. Spray Cans	68.35

Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

● Synthetic Compressor Oil¹³

Use in compressors that require ISO 46 • SAE 20

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PCIQT	EA	1 Quart	13.99	17.69
PCIQT	CA	12 Quarts	158.25	200.70

● Synthetic Compressor Oil

Use in compressors that require ISO 100 • SAE 30/40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PCKQT	EA	1 Quart	14.29	18.09
PCKQT	CA	12 Quarts	161.95	205.75

^{33, 10, 32, 13} See page 47 for Proposition 65 information for this product.

CALIFORNIA PROPOSITION 65 WARNING STATEMENTS

- 10 ⚠️ WARNING:** This product can expose you to 2,2'-Iminodiethanol, which is known to the State of California to cause cancer, and Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 13 ⚠️ WARNING:** This product can expose you to Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 15 ⚠️ WARNING:** This product can expose you to Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 17 ⚠️ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 18 ⚠️ WARNING:** This product can expose you to Ethylene oxide, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 19 ⚠️ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer, and Methanol which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 21 ⚠️ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 23 ⚠️ WARNING:** This product can expose you to Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 25 ⚠️ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer, and Methanol which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 26 ⚠️ WARNING:** This product can expose you to n-Hexane, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 27 ⚠️ WARNING:** This product can expose you to Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 28 ⚠️ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 29 ⚠️ WARNING:** This product can expose you to Ethylene Glycol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 31 ⚠️ WARNING:** This product can expose you to Benzene and Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 32 ⚠️ WARNING:** This product can expose you to Tetrachloroethylene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 33 ⚠️ WARNING:** This product can expose you to Diethanolamine, which is known to the State of California to cause cancer, and 2-Methoxyethanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 35 ⚠️ WARNING:** This product can expose you to chemicals including Crystalline Quartz Silica, Naphthalene and Ethylbenzene, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 36 ⚠️ WARNING:** This product can expose you to chemicals including Crystalline Quartz Silica and Naphthalene, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 37 ⚠️ WARNING:** This product can expose you to chemicals such as lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



CHANGE SERVICE REQUESTED

Published 4 times annually

PRSR STD
US POSTAGE
PAID
AMSOIL

ISO 9001/ISO 14001 REGISTERED



WE HONOR



(Discover in U.S. only)

Snowmobile season is right around the corner. The AMSOIL Runs on Freedom® Limited Snowmobile Warranty protects both your sled and your freedom to use AMSOIL INTERCEPTOR® to protect it. AMSOIL.com/rofarranty



AMSOIL INC., 925 Tower Ave., Superior, WI 54880 • 715-392-7101 • Printed in the USA
© 2022, AMSOIL INC. All rights reserved. The AMSOIL logo is a registered trademark of AMSOIL INC.

AMSOIL.com

Winter 2022

Look **Under the Hood** of Preferred Customer Membership with Your MyRewards Page

The MyRewards page is a one-stop shop for Preferred Customers.



- **Track** earned, pending and expired rewards
- **Use** rewards with the click of a button
- **See** how close you are to your next \$5 reward
- **Track** progress toward free membership renewal
- **Update** your profile and preferences
- **Enter** your birthday month to receive your gift from AMSOIL
- **And more**



Log into your MyRewards page through AMSOIL.com (U.S.) or AMSOIL.ca (Canada) to get started.